


CATALOG NUMBER	TYPE
PROJECT	

LOW VOLTAGE ELECTRONIC TRANSFORMER

MODEL EN-1260-RB-AR

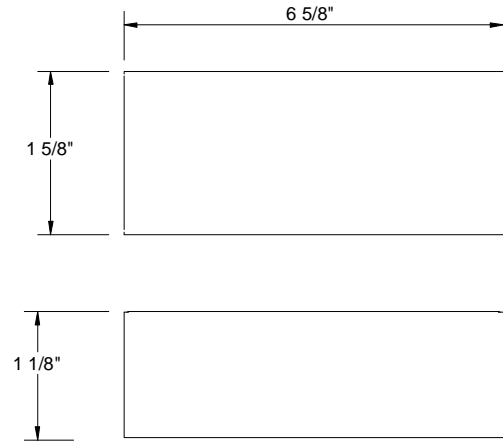

Ordering Matrix		
Model	Finish	Accessories
[]	[]	
EN-1260-RB-AR	BK	See table below

Ordering Example (model) : EN-1260-RB-AR


Product Details	
Description:	Low Voltage electronic transformer designed to be used as an enclosed remote transformer. Enclosure has separate compartments for transformer, line and low voltage wiring. Transformer may be safely loaded to 100% of stated capacity.
Catalog Number:	EN = Advanced electronic circuitry 1260 = 12 volt , 60 watt RB = Remote Boxed AR = Auto-Reset
Input:	120V (50/60Hz)
Output:	12V
Min Load:	20W
Max Load:	60W
Max Input Amp:	0.53A (@ 120V)
Transformer Frequency:	20khz. True RMS meter is required to read the high frequency output.
Listing:	U.L. listed, File Number E204239.
Accessories:	MTB-01 – Terminal Block

Specification Features
<ul style="list-style-type: none"> U.L. 2108 listed electronic low voltage transformer. Built-in auto reset, soft start, short and overload circuit protection features. Soft start delayed start feature extends lamp life. Dimmable with electronic low voltage dimmers. Dimmers should always be installed on the primary side of the transformer. In the case of a system overload or short circuit the transformer will revert to a "hold" position and then automatically reset the system when the problem is solved. System protection is designed to last several hours. 5 year W.A.C. Lighting product warranty.

CATALOG NUMBER	TYPE
PROJECT	

LOW VOLTAGE ELECTRONIC TRANSFORMER

MODEL EN-1275-RB-AR

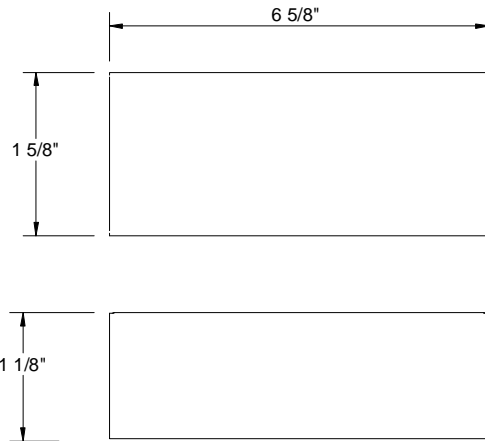

Ordering Matrix		
Model	Finish	Accessories
[]	[]	
EN-1275-RB-AR	BK	See table below


Ordering Example (model) : EN-1275-RB-AR

Product Details	
Description:	Low Voltage electronic transformer designed to be used as an enclosed remote transformer. Enclosure has separate compartments for transformer, line and low voltage wiring. Transformer may be safely loaded to 100% of stated capacity.
Catalog Number:	EN = Advanced electronic circuitry 1275 = 12 volt , 75 watt RB = Remote Boxed AR = Auto-Reset
Input:	120V (50/60Hz)
Output:	12V
Min Load:	35W
Max Load:	75W
Max Input Amp:	0.625A (@ 120V)
Transformer Frequency:	20khz. True RMS meter is required to read the high frequency output.
Listing:	U.L. listed, File Number E204239.
Accessories:	MTB-01 – Terminal Block

Specification Features
<ul style="list-style-type: none"> • U.L. 2108 listed electronic low voltage transformer. • Built-in auto reset, soft start, short and overload circuit protection features. Soft start delayed start feature extends lamp life. • Dimmable with electronic low voltage dimmers. Dimmers should always be installed on the primary side of the transformer. • In the case of a system overload or short circuit the transformer will revert to a "hold" position and then automatically reset the system when the problem is solved. System protection is designed to last several hours. • 5 year W.A.C. Lighting product warranty.

CATALOG NUMBER	TYPE
PROJECT	

LOW VOLTAGE ELECTRONIC TRANSFORMER MODEL EN-12150-RB-AR

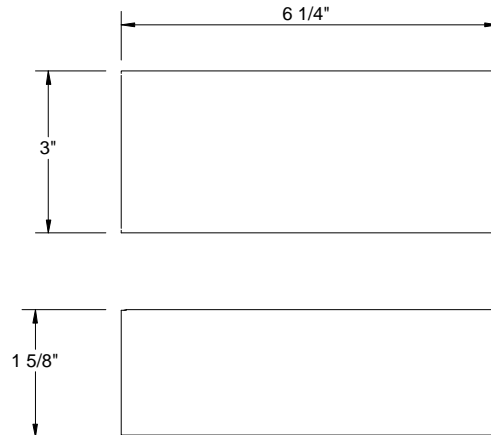

Ordering Matrix		
Model	Finish	Accessories
[]	[]	
EN-12150-RB-AR	BK	See table below

Ordering Example (model): EN-12150-RB-AR


Product Details	
Description:	Low Voltage electronic transformer designed to be used as an enclosed remote transformer. Enclosure has separate compartments for transformer, line and low voltage wiring. Transformer may be safely loaded to 100% of stated capacity.
Catalog Number:	EN = Advanced electronic circuitry 12150 = 12 volt , 150 watt RB = Remote Boxed AR = Auto-Reset
Input:	120V (50/60Hz)
Output:	12V
Min Load:	50W
Max Load:	150W
Max Input Amp:	1.25A (@ 120V)
Transformer Frequency:	20khz. True RMS meter is required to read the high frequency output.
Listing:	U.L. listed, File Number E204239.
Accessories:	MTB-01 – Terminal Block

Specification Features
<ul style="list-style-type: none"> • U.L. 2108 listed electronic low voltage transformer. • Built-in auto reset, soft start, short and overload circuit protection features. Soft start delayed start feature extends lamp life. • Dimmable with electronic low voltage dimmers. Dimmers should always be installed on the primary side of the transformer. • In the case of a system overload or short circuit the transformer will revert to a "hold" position and then automatically reset the system when the problem is solved. System protection is designed to last several hours. • 5 year W.A.C. Lighting product warranty.

CATALOG NUMBER	TYPE
PROJECT	

LOW VOLTAGE ELECTRONIC TRANSFORMER

MODEL EN-24150-RB-AR

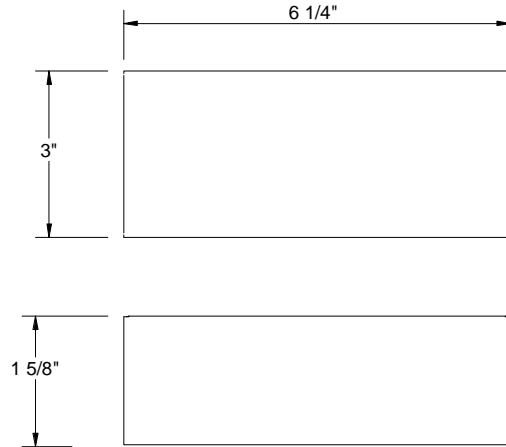

Ordering Matrix		
Model	Finish	Accessories
[]	[]	
EN-24150-RB-AR	BK	See table below

Ordering Example (model) : EN-24150-RB-AR


Product Details	
Description:	Low Voltage electronic transformer designed to be used as an enclosed remote transformer. Enclosure has separate compartments for transformer, line and low voltage wiring. Transformer may be safely loaded to 100% of stated capacity.
Catalog Number:	EN = Advanced electronic circuitry 24150 = 24 volt , 150 watt RB = Remote Boxed AR = Auto-Reset
Input:	120V (50/60Hz)
Output:	24V
Min Load:	50W
Max Load:	150W
Max Input Amp:	1.25A (@ 120V)
Transformer Frequency:	20khz. True RMS meter is required to read the high frequency output.
Listing:	U.L. listed, File Number E204239.
Accessories:	MTB01 – Terminal Block

Specification Features
<ul style="list-style-type: none"> • U.L. 2108 listed electronic low voltage transformer. • Built-in auto reset, soft start, short and overload circuit protection features. Soft start delayed start feature extends lamp life. • Dimmable with electronic low voltage dimmers. Dimmers should always be installed on the primary side of the transformer. • In the case of a system overload or short circuit the transformer will revert to a "hold" position and then automatically reset the system when the problem is solved. System protection is designed to last several hours. • 5 year W.A.C. Lighting product warranty.

CATALOG NUMBER	TYPE
PROJECT	

LOW VOLTAGE ELECTRONIC TRANSFORMER

MODEL EN-B12PY-AR

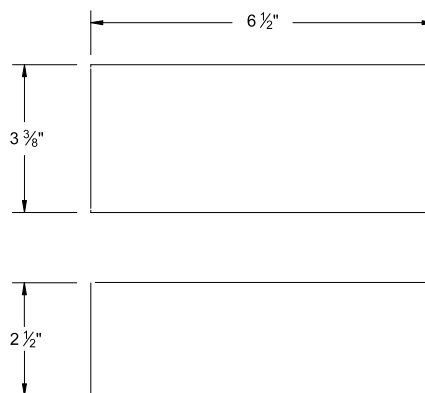

Ordering Matrix	
Model	Accessories
<div style="border: 1px solid black; width: 100px; height: 20px; margin: 0 auto;"></div>	
EN-B12PY-AR	See table below

Ordering Example (model) : EN-12BPY-AR


Product Details	
Description:	Low Voltage electronic transformer designed to be used as an enclosed remote transformer. Enclosure has separate compartments for transformer, line and low voltage wiring. Transformer may be safely loaded to 100% of stated capacity.
Catalog Number:	EN = Electronic 12B = 12volt, boxed PY = 250w AR = Auto-Reset
Input:	120V (50/60Hz)
Output:	12V
Min Load:	100W
Max Load:	250W
Max Input Amp:	2.0A (@ 120V)
Transformer Frequency:	20khz. True RMS meter is required to read the high frequency output.
Listing:	U.L. and C.U.L. listed. File Number E204239
Accessories:	MTB01 – Terminal Block

Specification Features
<ul style="list-style-type: none"> Built-in auto reset, soft start, short and overload circuit protection features. Soft start delayed start feature extends lamp life. In the case of a system overload or short circuit the transformer will revert to a "hold" position and then automatically reset the system when the problem is solved. System protection is designed to last several hours. Dimmable with electronic low voltage dimmers. Dimmers should always be installed on the primary side of the transformer. 5 year WAC Lighting product warranty.

CATALOG NUMBER	TYPE
PROJECT	

LOW VOLTAGE ELECTRONIC TRANSFORMER

MODEL EN-B24PZ-AR

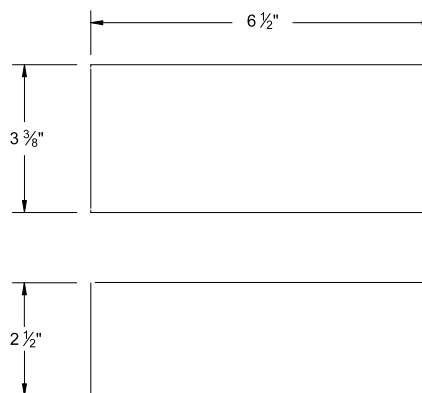

Ordering Matrix		
Model	Finish	Accessories
<div style="border: 1px solid black; width: 100px; height: 20px; margin: 0 auto;"></div>	<div style="border: 1px solid black; width: 100px; height: 20px; margin: 0 auto;"></div>	
EN-B24PZ-AR	BK	See table below

Ordering Example (model) : EN-B24PZ-AR

Product Details	
Description:	Low Voltage electronic transformer designed to be used as an enclosed remote transformer. Enclosure has separate compartments for transformer, line and low voltage wiring. Transformer may be safely loaded to 100% of stated capacity.
Catalog Number:	EN = Electronic B24 = 24volt, boxed PZ = 300w AR = Auto-Reset
Input:	120V (50/60Hz)
Output:	24V
Min Load:	100W
Max Load:	300W
Max Input Amp:	2.5A (@ 120V)
Transformer Frequency:	20khz. True RMS meter is required to read the high frequency output.
Listing:	U.L. and C.U.L. listed. File Number E204239
Accessories:	MTB01 – Terminal Block

Specification Features
<ul style="list-style-type: none"> Built-in auto reset, soft start, short and overload circuit protection features. Soft start delayed start feature extends lamp life. In the case of a system overload or short circuit the transformer will revert to a "hold" position and then automatically reset the system when the problem is solved. System protection is designed to last several hours. Dimmable with electronic low voltage dimmers. Dimmers should always be installed on the primary side of the transformer. 5 year WAC Lighting product warranty.