

# LS-C High Efficiency Series

LS8™ Commercial High Efficiency Series LED Surface Ambient Luminaire – 8'

## Product Description

The LS-C High Efficiency Series surface ambient luminaire delivers up to 139-157 lumens per watt with 80+ CRI illumination. The 8' [2438mm] luminaire is available with up to 10,000 lumens in 3500K, 4000K and 5000K color temperatures. The LS-C High Efficiency Series features sleek and compact architectural design with flexible lumen packages, color temperatures and standard 0-10V dimming. Flexible mounting of the LS-C High Efficiency Series allows for individual mount or continuous row applications for surface mount, suspended mount, pendant mount and cove installations.

**Applications:** Surface and suspended ambient applications for new construction and upgrade

## Performance Summary

**Initial Delivered Lumens:** 8,000-10,000 lumens

**Input Power:** 51 or 72 watts

**Efficacy:** 139-157 LPW

**CRI:** 80+ CRI

**CCT:** 3500K, 4000K, 5000K

**Input Voltage:** 120-277 VAC or 347 VAC

**L<sub>70</sub> Lifetime:** > 100,000 hours at 35°C

**Limited Warranty\*:** 5 years on luminaire

**Limited Warranty Emergency Back Up (EB) Battery:** 1 Year on Battery Back Up. Test regularly in accordance with local codes

**Dimensions:** L 96.0" [2438mm] x W 2.5" [64mm] x H 3.0" [77mm]

**Weight:** 10 lbs. [4.5kg]

**Dimming:** 0-10V dimming to 5%

\* See <http://lighting.cree.com/warranty> for warranty terms

## Reflectors & Accessories


Field-Installed		
<b>Reflectors</b> - Refer to reflector spec sheet <b>Solid</b> LS8-SR - Pair of reflectors <b>Apertured</b> LS8-AR - Pair of reflectors <b>Joint Aligner</b> LS-RJ - Top housing aligner for continuous rows LS-RFLJ - Reflector aligner for continuous row	<b>Adjustable Cable Support Kits for T-Bar Applications:</b> AC5-48-Q14B-TB AC5-48-Q14B-TB-50BULK (Pack of 50) - Includes 5.0" [127mm] Canopy, 48.0" [1219mm] Adjustable Cable, Q14B Gripper and T-Bar Clip AC2-48-Q14B-TB AC2-48-Q14B-TB-50BULK (Pack of 50) - Same as above except with 2" [51mm] Canopy <b>Adjustable Loop Cable Kit for Unfinished Ceiling Applications:</b> AC-144-Q14B-LP AC-144-Q14B-LP-50BULK (Pack of 50) - Includes 144.0" [366cm] L x 1/16" [2mm] Diameter Adjustable Galvanized Loop Cable w/ Q14B Gripper <b>Continuous Row Through Wiring Kit:</b> LS8TWK - Includes [3] #12AWG 54.0" [1372mm] Wires for Line (black), Neutral (white), Ground (green), [2] #18AWG 54.0" [1372mm] Wires for 0-10V dimming (purple, gray) and [10] Wire Nuts - Optional accessory for use when luminaire is not ordered with factory installed TW option - Not for use with EB14 option	<b>Adjustable Cable Support Kits w/ Power Feeds:</b> AC5-12/3-48-Q14B-JB - Non-dimming applications - Includes 5.0" [127mm] Cable Canopy, 48" [1219mm] #12/3 SJT Cord, Q14B Gripper and J-Box Strap AC5-18/5-48-Q14B-JB - Dimming applications - Includes 5.0" [127mm] Cable Canopy, 48.0" [1219mm] #18/5 SJT Cord, Q14B Gripper and J-Box Strap AC5-18/2-48-Q14B-JB - For use with AC5-12/3-48-Q14B-JB for selective luminaire dimming control in row mounted luminaires - Includes 5.0" [127mm] Cable Canopy, 48.0" [1219mm] #18/2 SVT Cord, Q14B Gripper and J-Box Strap <b>Dimming Occupancy Sensor w/Photocell</b> S-WRAC-OC-1 - Enables daylight harvesting - Not for use with EB14 option - Not for continuous row applications - Refer to installation instructions for details

\* Refer to the [CS & LS Accessory spec sheet](#) for more details

## Ordering Information

Example: LS8C-80L-35K-10V-FD

LS8C				10V	FD	
Product	Initial Delivered Lumens	CCT	Voltage	Control	CRI	Options
LS8C	<b>80L</b> 51W, 8,000 lumens <b>100L</b> 72W, 10,000 lumens	<b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K	<b>Blank</b> 120-277 Volt <b>34</b> 347 Volt	<b>10V</b> 0-10V dimming to 5%	<b>FD</b> 80+ CRI	<b>EB14 Emergency Backup</b> - Minimum 90 minutes - 1,400 lumens - Minimum operating temperature: 0°C [32°F] - Not for use with 34 voltage <b>TW Through Wire Option</b> - Factory installed - Includes quick connects for use in continuous row applications - Not for use with EB14 option

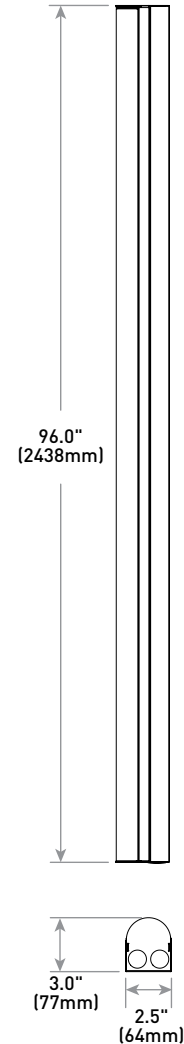

US: [lighting.cree.com](http://lighting.cree.com)

T (800) 236-6800 F (262) 504-4515

Rev. Date: V1 02/08/2018

Canada: [www.cree.com/canada](http://www.cree.com/canada)



T (800) 473-1234 F (800) 890-7507

**Product Specifications**

**CONSTRUCTION & MATERIALS**

- Constructed of durable 22 gauge steel
- Acrylic lens delivers a low-glare, diffused light distribution
- Prepainted white for enhanced smooth finish

**OPTICAL SYSTEM**

- Unique combination of reflective and refractive optical components achieves a uniform, comfortable appearance while eliminating pixelation and color fringing
- Components work together to optimize distribution, balancing the delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces. This increases the perception of spaciousness

**ELECTRICAL SYSTEM**

- **Power Factor:** > 0.9
- **Input Power:** Stays constant over life
- **Input Voltage:** 120-277V or 347V, 60Hz
- **Operating Temperature Range:** -28°C - +35°C (-18.4°F - +95°F); minimum operating temperature with EB14 option is 0°C (32°F)
- **Total Harmonic Distortion:** < 25%

**CONTROLS**

- Continuous dimming to 5% with 0-10V DC control protocol
- **10V Source Current:** 0.30mA
- Use only lighting controls with neutral connection or controls intended for use with LED fixtures
- Reference [www.creelink.com/exLink.asp?70982140Z58R34126620963](http://www.creelink.com/exLink.asp?70982140Z58R34126620963) for recommended dimming controls and wiring diagrams

**REGULATORY & VOLUNTARY QUALIFICATIONS**

- cULus Listed pending
- Suitable for damp locations
- Suitable for continuous row mounting
- Requires minimum 90°C supply conductors
- Designed for indoor use
- Not intended for use in environments containing airborne corrosive agents such as chemical solvents, cleaners, or cutting fluids
- **Ingress Protection:** IP20 pending
- UL924 (EB option). Maximum mounting height: 10.0' (3.0m)
- RoHS compliant pending. Consult factory for additional details
- Meets FCC Part 15, Subpart B, Class A standards for conducted and radiated emissions pending

Electrical Data*								
Initial Delivered Lumens	CCT	System Watts		Total Current (A)				
		120-277V	347V	120V	208V	240V	277V	347V
80L	35K	57	57	0.48	0.27	0.24	0.21	0.17
	40K	54	53	0.45	0.27	0.23	0.20	0.16
	50K	51	52	0.43	0.26	0.22	0.19	0.16
80L w/EB14	35K	60	N/A	0.50	0.30	0.26	0.23	N/A
	40K	56	N/A	0.47	0.28	0.25	0.21	N/A
	50K	57	N/A	0.48	0.27	0.24	0.21	N/A
100L	35K	72	TBD	0.61	0.35	0.30	0.26	TBD
	40K	68	TBD	0.57	0.33	0.28	0.25	TBD
	50K	66	TBD	0.56	0.32	0.28	0.24	TBD
100L w/EB14	35K	78	N/A	0.65	0.38	0.33	0.28	N/A
	40K	73	N/A	0.61	0.35	0.30	0.26	N/A
	50K	71	N/A	0.60	0.35	0.30	0.26	N/A


\* Electrical data at 25°C (77°F). Actual wattage may differ by +/- 10% when operating between 120-347V +/- 10%

© 2018 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent [www.cree.com/patents](http://www.cree.com/patents). Cree® is a registered trademark, and the Cree logo, and LS8™ are trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC.

**Photometry**

**LS4C-40L-35K-10V-FD BASED ON DTC REPORT TEST #: PL11642-001A**

Luminaire photometry has been conducted by a NVLAP accredited testing laboratory in accordance with IESNA LM-79-08. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a luminaire efficiency of 100%.

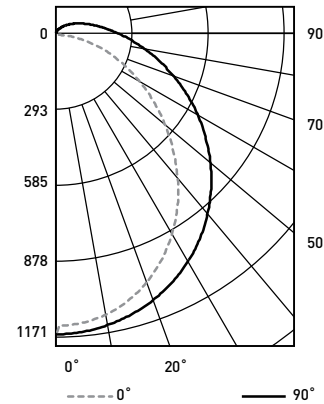

Average Luminance Table (cd/m²)				
Vertical Angle	Horizontal Angle			
	0°	45°	90°	
45°	11,443	10,198	10,309	
55°	10,143	8,955	9,283	
65°	8,760	7,784	8,258	
75°	7,133	6,748	7,245	
85°	5,122	6,049	6,484	

Coefficients Of Utilization – Zonal Cavity Method				
RC %:	80			
RW %:	70	50	30	10
RCR: 0	117	117	117	117
1	105	100	95	90
2	95	86	79	72
3	86	75	67	60
4	79	66	57	50
5	73	59	50	43
6	67	53	44	38
7	62	48	39	33
8	58	44	35	29
9	54	40	32	26
10	51	37	29	24

Effective Floor Cavity Reflectance: 20%

Zonal Lumen Summary			
Zone	Lumens	% Lamp	Luminaire
0-30	891	N/A	23.1%
0-40	1,453	N/A	37.7%
0-60	2,563	N/A	66.6%
0-90	3,527	N/A	91.6%
0-180	3,851	N/A	100%

Above data is for a 4' luminaire. For use of an 8' luminaire in an application, use two 4' luminaires. Reference <http://lighting.cree.com/products/indoor/surface-ambient/ls-series> for detailed photometric data

LS-C Series Ambient Adjusted Lumen Maintenance <sup>1</sup>					
Ambient	Initial LMF	25K hr Projected <sup>2</sup> LMF	50K hr Calculated <sup>3</sup> LMF	75K hr Calculated <sup>3</sup> LMF	100K hr Calculated <sup>3</sup> LMF
0°C (32°F)	1.04	0.98	0.90	0.83	0.77
5°C (41°F)	1.03	0.97	0.89	0.82	0.76
10°C (50°F)	1.02	0.96	0.89	0.82	0.75
15°C (59°F)	1.01	0.95	0.88	0.81	0.74
20°C (68°F)	1.01	0.95	0.88	0.81	0.74
25°C (77°F)	1.00	0.94	0.87	0.80	0.74
30°C (86°F)	0.99	0.93	0.86	0.79	0.73
35°C (95°F)	0.99	0.93	0.86	0.79	0.73

<sup>1</sup> Lumen maintenance values at 25°C are calculated per TM-21 based on LM-80 data and in-situ luminaire testing. Luminaire ambient temperature factors [LATF] have been applied to all lumen maintenance factors  
<sup>2</sup> In accordance with IESNA TM-21-11, Projected Values represent interpolated value based on time durations that are within six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing (DUT) i.e. the packaged LED chip  
<sup>3</sup> In accordance with IESNA TM-21-11, Calculated Values represent time durations that exceed six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing (DUT) i.e. the packaged LED chip

