

# ZR-C Commercial Series

ZR22™ 2' x 2' Commercial Series LED Troffer with Matte Finish

## Product Description

The ZR-C Commercial Series is a commercial spec-grade LED troffer delivering superior energy efficiency of up to 135 lumens per watt for maximum energy savings. The ZR-C delivers a visually comforting aesthetic with better light distribution enhanced with a soft matte finish housing. ZR-C Commercial Series comes standard with 80+ CRI color quality, 0-10V dimming down to 5% standard, and a new unique snap and lock room-side removable lens, making it the perfect combination of affordability and performance.

## Performance Summary

**Efficacy:** Up to 135 LPW

**Initial Delivered Lumens:** 3,200 or 4,000 lumens

**Input Power:** 26 or 32 watts

**CRI:** 80+ CRI

**CCT:** 3000K (32L only), 3500K, 4000K, 5000K (32L only)

**Input Voltage:** 120-277 VAC

**Limited Warranty\*:** 5 years on luminaire

**Limited Warranty Emergency Back Up (EB) Battery:** 1 Year on Battery Back Up. Test regularly in accordance with local codes

**Controls:** 0-10V dimming to 5%

**Mounting:** Recessed\*

Room-side accessible snap and lock removable lens

\* See <http://lighting.cree.com/warranty> for warranty terms

\* Not intended for use with 9/16" T-Bar grids unless used with a 9/16" accessory clip like "Armstrong® LFC - Fixture Clip" which can be purchased through distribution. Consult factory for non-standard grid applications.


## Accessories

Field-Installed	
<b>Drywall Grid Adapter</b> <a href="#">DGA22-WHT</a>	<b>Wireless 0-10V Dimming/Switching Interface with Cree Smartcast® Technology</b> <a href="#">CIF-10V-CWC-SNSR</a>
<b>Surface Mount Kit</b> <a href="#">SMK-ZR22</a>	- For use with luminaires with 10V controls when integral SmartCast isn't available
- Not for use with EB14 or SmartCast® Technology	<b>Cree SmartCast® Technology Configuration Tool</b> <a href="#">CCT-CWC-1</a>
<b>6' Flexible Power Whip</b> <a href="#">PW-18/4-06-9T-SS</a>	- One required per project when CIF-10V is selected
- For use in non-dimming applications only	<b>Chicago Plenum Field Kit</b> CPLZR
	- Fits all ZR types to be installed in the field

## Ordering Information

Example: ZR22C-32L-35K-10V-FD

Product	Initial Delivered Lumens	CCT	Voltage	Control	CRI	Options
ZR22C	32L 26W, 3,200 lumens 40L 32W, 4,000 lumens	30K 3000K - Available with 32L only 35K 3500K 40K 4000K 50K 5000K - Available with 32L only	Blank 120-277 Volt	10V 0-10V dimming to 5%	FD 80+ CRI	EB14 Emergency Backup - 1,400 lumens - Provides 90 minutes of emergency operation

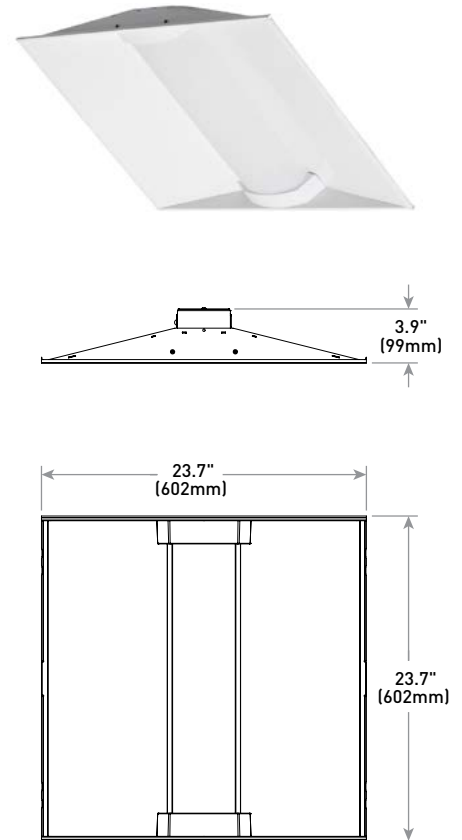

Rev. Date: V4 03/15/2018

US: [lighting.cree.com](http://lighting.cree.com)

T (800) 236-6800 F (262) 504-5415

Canada: [www.cree.com/canada](http://www.cree.com/canada)



T (800) 473-1234 F (800) 890-7507

## Product Specifications

### CONSTRUCTION & MATERIALS

- Durable 22 ga. cold rolled steel housing provides strength and uniformity
- Ultra-thin 3.9" (99mm) luminaire height and lightweight design effectively target a broad range of plenum spaces and allow for easy installations
- Luminaire is pre-painted for enhanced smooth matte finish
- Includes t-bar clips and holes for mounting support wires (by others)
- Luminaire sides and ends are hemmed in for safe, easy handling
- Includes lens gasket to prevent ingress of insects
- Not for installation within 3" (76mm) of insulation
- Removable lens for easy maintenance and cleaning
- Magnetic lens to prevent dust and bug intrusion

### OPTICAL SYSTEM

- Unique luminaire design creates perfect balance of both horizontal and vertical illumination
- Optimized smooth acrylic lens eliminates pixelation and delivers a low-glare, diffused light distribution

### ELECTRICAL SYSTEM

- **Power Factor:** = 0.9 nominal
- **Input Power:** Stays constant over life
- **Input Voltage:** 120-277V, 60Hz
- **Operating Temperature Range:** 0°C - + 35°C (32°F - + 95°F)
- **Total Harmonic Distortion:** < 20%; < 22% (EB14)

### CONTROLS

- Continuous dimming to 5% with 0-10V DC control protocol
- **10V Source Current:** 0.25mA
- For use with Class 2 dimming systems only
- Use only lighting controls with neutral connection or controls intended for use with LED fixtures
- Reference [www.creelink.com/exLink.asp?70982140Z58R34126620963](http://www.creelink.com/exLink.asp?70982140Z58R34126620963) for recommended dimming controls and wiring diagrams

### REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed
- Suitable for damp locations
- Designed for indoor use
- UL924 (EB option). Maximum mounting height: 15.0' (4.6m)
- RoHS compliant. Consult factory for additional details
- Meets FCC Part 15, Subpart B, Class A standards for conducted and radiated emissions
- DLC Premium qualified. Please refer to <https://www.designlights.org/search/> for most current information

### Electrical Data\*

Initial Delivered Lumens	System Watts 120-277V	Total Current (A)			
		120V	208V	240V	277V
32L	26	0.21	0.13	0.11	0.10
32L w/EB14 Option	28	0.24	0.16	0.14	0.12
40L	32	0.25	0.15	0.13	0.12
40L w/EB14 Option	34	0.30	0.18	0.16	0.14

\* Electrical data at 25°C (77°F). Actual wattage may differ by +/- 10% when operating between 120-277V +/- 10%

### ZR-C Series Ambient Adjusted Lumen Maintenance<sup>1</sup>

Ambient	Initial LMF	25K hr Projected <sup>2</sup> LMF	50K hr Projected <sup>2</sup> LMF	75K hr Calculated <sup>3</sup> LMF	100K hr Calculated <sup>3</sup> LMF
0°C (32°F)	1.04	0.98	0.90	0.83	0.77
5°C (41°F)	1.03	0.97	0.89	0.82	0.76
10°C (50°F)	1.02	0.96	0.89	0.82	0.75
15°C (59°F)	1.01	0.95	0.88	0.81	0.74
20°C (68°F)	1.01	0.95	0.88	0.81	0.74
25°C (77°F)	1.00	0.94	0.87	0.80	0.74
30°C (86°F)	0.99	0.93	0.86	0.79	0.73
35°C (95°F)	0.99	0.93	0.86	0.79	0.73

<sup>1</sup> Lumen maintenance values at 25°C are calculated per TM-21 based on LM-80 data and in-situ luminaire testing. Luminaire ambient temperature factors (LATF) have been applied to all lumen maintenance factors

<sup>2</sup> In accordance with IESNA TM-21-11, Projected Values represent interpolated value based on time durations that are within six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing (DUT) i.e. the packaged LED chip

<sup>3</sup> In accordance with IESNA TM-21-11, Calculated Values represent time durations that exceed six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing (DUT) i.e. the packaged LED chip

## Application Reference

### Open Space

Spacing	Initial Delivered Lumens	Lumens	Wattage	LPW	w/ft <sup>2</sup>	Average fc
8 x 8	32L	3,200	26	123	0.39	46
	40L	4,000	32	125	0.48	58
8 x 10	32L	3,200	26	123	0.33	38
	40L	4,000	32	125	0.41	48
10 x 10	32L	3,200	26	123	0.26	30
	40L	4,000	32	125	0.32	38
10 x 12	32L	3,200	26	123	0.21	24
	40L	4,000	32	125	0.26	30


10' ceiling: 80/50/20 reflectances; 2.5' workplane, open room. LLF: 1.0 Initial Open Space: 50' x 40' x 10'

ZR22™ 2' x 2' Commercial Series LED Troffer with Matte Finish

Photometry

ZR22C-32L-50K-10V-FD BASED ON CESTL REPORT TEST #: PL10455-001A

Luminaire photometry has been conducted by a NVLAP accredited testing laboratory in accordance with IESNA LM-79-08. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a luminaire efficiency of 100%.

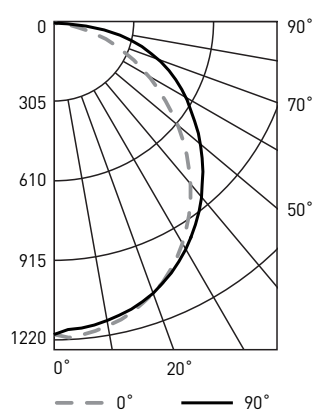

Coefficients Of Utilization – Zonal Cavity Method				
RC %:	80			
RW %:	70	50	30	10
RCR: 0	119	119	119	119
1	108	103	99	94
2	98	89	82	76
3	89	78	70	63
4	82	69	60	53
5	75	62	53	46
6	69	56	47	40
7	64	51	42	35
8	60	46	38	32
9	56	42	34	28
10	52	39	31	26

Effective Floor Cavity Reflectance: 20%

Zonal Lumen Summary			
Zone	Lumens	% Lamp	Luminaire
0-30	930	N/A	26.9%
0-40	1,511	N/A	43.8%
0-60	2,639	N/A	76.5%
0-90	3,451	N/A	100%
0-180	3,451	N/A	100%

Average Luminance Table (cd/m²)				
Vertical Angle	Horizontal Angle			
		0°	45°	90°
45°		15,301	16,151	17,278
55°		13,704	15,436	17,391
65°		11,974	15,221	18,432
75°		9,628	15,678	20,260
85°		6,242	15,778	20,727

Reference <http://lighting.cree.com/products/indoor/troffers/zr-series> for detailed photometric data

