

Pro

ProXchange 2100/mw



FEATURES

- Watertight toggle switch.
- Wide range of switch types in single pole, double pole, three way or four way units.
- Cast marine brass or copper free aluminum construction available.
- Heavy duty mounting pads.
- Neoprene gasket resists petroleum and provides a watertight seal.
- Silicone lubricant provided for cover screws and flange.
- Switches rated at 15, 20 or 30 Amp.

APPLICATIONS

- Marine and watertight requirements

APPROVALS

- Conforms to IP66
- ABS

TECHNICAL SPECIFICATIONS

BOX/COVER/HANDLE

Cast marine brass or copper free aluminum.

HARDWARE

Stainless steel.

GASKET

One piece neoprene.

ENTRIES

Standard units undrilled. Up to four 1" NPT outlets available. See ENTRY OPTIONS for selections.

VOLTAGE AND CURRENT

SWITCH

15 Amp, 277v AC
20 Amp, 250v AC
30 Amp, 250v AC

MOUNTING

Surface, via two 1/4" mounting bolts (not included).

ORDERING REFERENCES

PART NUMBER	DESCRIPTION	VOLTAGE AND CURRENT	WEIGHT LBS
2100B	BRASS, SINGLE GANG, Single Pole	15A 277v AC	4.3
2111B	BRASS, SINGLE GANG, Single Pole	20A 250v AC	4.3
2121B	BRASS, SINGLE GANG, Single Pole	30A 250v AC	4.3
2102B	BRASS, SINGLE GANG, Double Pole	15A 277v AC	4.3
2112B	BRASS, SINGLE GANG, Double Pole	20A 250v AC	4.3
2119B*	BRASS, SINGLE GANG, Double Pole	20A 250v AC	4.3
2122B	BRASS, SINGLE GANG, Double Pole	30A 250v AC	4.3
2103B	BRASS, SINGLE GANG, Three Way	15A 277v AC	4.3
2113B	BRASS, SINGLE GANG, Three Way	20A 250v AC	4.3
2123B	BRASS, SINGLE GANG, Three Way	30A 250v AC	4.3
2104B	BRASS, SINGLE GANG, Four Way	15A 277v AC	4.3
2100A	ALUMINUM, SINGLE GANG, Single Pole	15A 277v AC	1.8
2111A	ALUMINUM, SINGLE GANG, Single Pole	20A 250v AC	1.8
2121A	ALUMINUM, SINGLE GANG, Single Pole	30A 250v AC	1.8
2102A	ALUMINUM, SINGLE GANG, Double Pole	15A 277v AC	1.8
2112A	ALUMINUM, SINGLE GANG, Double Pole	20A 250v AC	1.8
2119A*	ALUMINUM, SINGLE GANG, Double Pole	20A 250v AC	1.8
2122A	ALUMINUM, SINGLE GANG, Double Pole	30A 250v AC	1.8
2103A	ALUMINUM, SINGLE GANG, Three Way	15A 277v AC	1.8
2113A	ALUMINUM, SINGLE GANG, Three Way	20A 250v AC	1.8
2123A	ALUMINUM, SINGLE GANG, Three Way	30A 250v AC	1.8
2104A	ALUMINUM, SINGLE GANG, Four Way	15A 277v AC	1.8

* On/On, no center "Off" position.

ENTRY OPTIONS

NPT Trade Size	Dead End	Thru Feed	X-Positions
1/2"	E1	C1	X1
3/4"	E2	C2	X2
1"	E3	C3	X3



SPARE PARTS

Part No.	Description
INX6547B	COVER, BRASS
INX6547A	COVER, ALUMINUM
INX6030B	BOX, BRASS
INX6030A	BOX, ALUMINUM
GKT6008	GASKET
INX3034	SINGLE POLE SWITCH, 15 Amp 277v AC
INX3025	SINGLE POLE SWITCH, 20 Amp 250v AC
INX3026	SINGLE POLE SWITCH, 30 Amp 250v AC
INX3002	DOUBLE POLE SWITCH 15 Amp 277v AC
INX3038	DOUBLE POLE SWITCH 20 Amp 250v AC
INX3249*	DOUBLE POLE SWITCH 20 Amp 250v AC
INX3008	DOUBLE POLE SWITCH 30 Amp 250v AC
INX3040	THREE WAY SWITCH, 15 Amp 277v AC
INX3041	THREE WAY SWITCH, 20 Amp 250v AC
INX3042	THREE WAY SWITCH, 30 Amp 250v AC
INX3009	FOUR WAY SWITCH, 15 Amp 277v AC

* On/On, no center "Off" position.

ProXchange **2100**/mw

DIMENSIONS

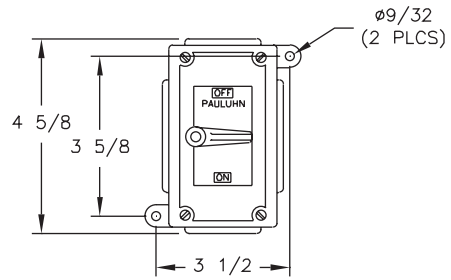

Dimensions in inches

2100B-2104B / 2111B-2113B
2121B-2123B

NOTES