1-Gang weatherproof boxes

1-Gang boxes

Product description

Cast aluminum FS boxes Non-metallic FS boxes

Cast aluminum weatherproof FS boxes

Features


- Electrostatically painted with a baked, weatherresistant powder finish for exceptional durability
- Accept single gang weatherproof cover and standard FS covers
- UL Listed for wet and damp locations with appropriate cover installed
- Mounting lugs provide strength and durability on any mounting surface
- Raised knockout studs on back of box provide alternative means for wall mounting. Strike desired studs with sharp hammer blow for clean mounting holes

SECTION

- Easy access ground screw hole located inside back wall of box
- Threaded outlets for conduit and connectors
- Two closure plugs and mounting lugs furnished

1-Gang FS boxes 🛛 🖓 🗤

Description	End openings	Back openings	Catalog no.	
3 hole 0.50" (12.70mm) dia.	1-1	1	□1113	• •
4 hole 0.50" (12.70mm) dia.	2-1	1	□ 1114	• •
5 hole 0.50" (12.70mm) dia.	2-2	1	□1115	• •
3 hole 0.75" (19.05mm) dia.	1-1	1	□1116	• •
5 hole 0.75" (19.05mm) dia.	2-2	1	□ 1118	• •

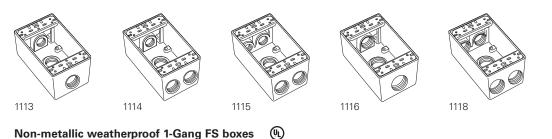

Description	Color	Catalog no.
FS Box with (2) 0.75" (19.05mm) IPS molded-in knockouts	ВК	□ 6080

Color information:

BK (Black)



Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32

