



## SCSS : LED SURFACE CANOPY SQUARE

### DESCRIPTION

The SCSS features low profile, contemporary design for both surface and pendant mount applications.

### FEATURES

- Unique quick mount design
- UV stabilized bronze powder coat finish
- Extremely low profile is ideal for confined spaces

### LISTINGS

- UL/cUL Listed for wet locations
- DesignLights Consortium® Qualified - meets DLC requirements for efficacy and lumen maintenance

### LED CHARACTERISTICS

- Rated lifetime L70: 50,000 hours
- 4000K, 5000K CCT
- CRI: 70+

### ELECTRICAL

- Input voltage: 120-277V

### CONSTRUCTION

- Die-cast aluminum construction
- Impact-resistant polycarbonate lens
- 104°F (40°C) maximum ambient operating temperature

### WARRANTY

- 5 year limited warranty; see eiko.com for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



### APPLICATIONS

- Entryways
- Garages
- Plazas
- Utility Closets
- Public Restrooms
- Eaves



## ORDERING INFORMATION

EXAMPLE: SCSS-1C-50K-U


Model	Package	CCT	Voltage
SCSS : LED Surface Canopy Square	1C - 40W; 4,800 lm	40K - 4000K 50K - 5000K	U - 120-277V

## PERFORMANCE SUMMARY

Order Code	Item #	Watts	Lumens	CCT	CRI	Volts	DLC
10627	SCSS-1C-40K-U	40W	4,800	4000K	70+	120-277V	✓
09746	SCSS-1C-50K-U	40W	4,800	5000K	70+	120-277V	✓

✓DesignLights Consortium® Qualified

## DIMENSIONS

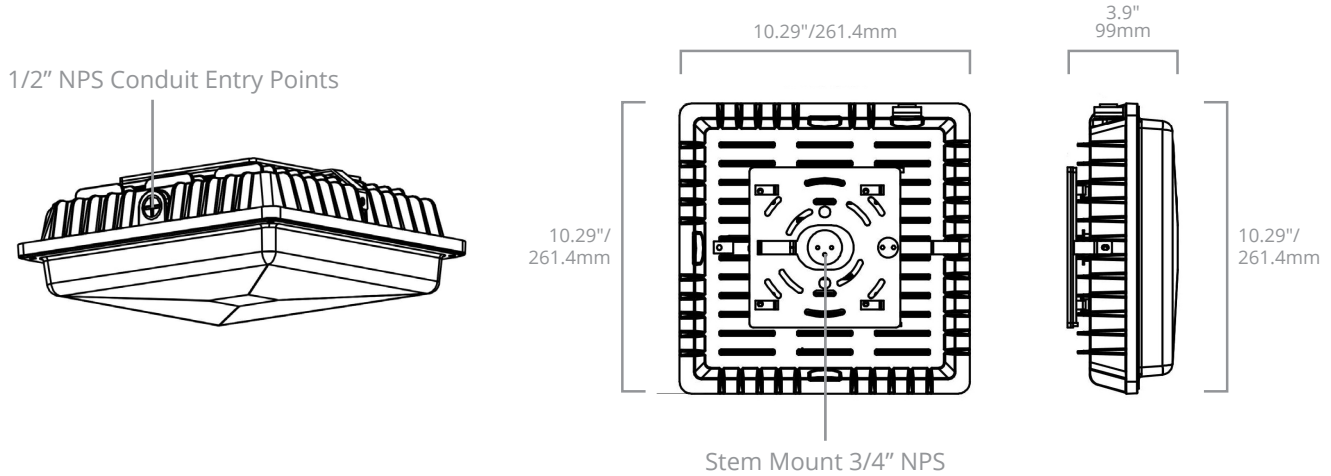

## AVAILABLE ACCESSORIES

Order Code	Item #	Description
09966	PC1-4036-U	Photocell, Flush Mount, 120-277V
09967	PC1-4136-U	Photocell, Stem Mount, Side Lens, 120-277V
09968	PC1-4236-U	Photocell, Stem Swivel Mount, Side Lens, 120-277V
09969	PC1-4736-U	Photocell, Stem Swivel Mount, Top Lens, 120-277V