

► Model 310X-MV

AudioMaster® Hazardous Location Two-Way Intercom



Federal Signal's AudioMaster® 310X-MV is a two-way industrial intercom that provides reliable communications and superior sound quality. This unit has a rugged Type 4X housing and is rated for Class I, Division 2, Groups A, B, C, & D; Class II, Division 2, Groups F & G; and Class III.

The AudioMaster 310X-MV's standard features include volume control, call button, balanced line output, dust- and water-tight housing, listen/talk switch, remote device activation, and the ability to power another intercom at 24VDC.

This heavy duty intercom will operate from -31°F to 149°F (-35°C to 65°C) for both indoor and outdoor applications. Remote device activation allows you to activate an auxiliary signal such as a horn or light.

The AudioMaster 310-MV intercom is easy to operate. Press the toggle switch to talk and then release to listen. Additionally, press the call button to get the attention of personnel at another intercom.

The 310X-MV is ideal for use at oil refineries, petrochemical plants, offshore platforms, pulp and paper mills, water treatment facilities, airports, shipyards or anywhere reliable two-way communication is important for safe and efficient operation.

FEATURES


- Multi-voltage design accepts 24VDC, 120VAC and 240VAC
- Heavy-duty industrial intercom for indoor or outdoor applications
- Balanced line output
- Call button
- Talk/Listen switch
- Volume control
- Auxiliary remote signal contact
- Rated for Class I, Division 2
- Type 4X, IP65 enclosure
- UL and cUL Listed, CSA Certified and Marine Listed

MODEL	VOLTAGE	OPERATING CURRENT	STANDBY CURRENT	FREQUENCY RESPONSE (-6dBA)	INPUT IMPEDANCE
310X-MV	24VDC	465 mA	62 mA	150Hz-12KHz	3400 Ohms
	120VAC 50/60Hz	163 mA	70 mA	150Hz-12KHz	3400 Ohms
	240VAC 50/60Hz	82 mA	35 mA	150Hz-12KHz	3400 Ohms

HAZARDOUS LOCATION RATING: 310X-MV

T-CODE AT MAXIMUM AMBIENT TEMPERATURE, °C		
HAZARDOUS LOCATION	40 °C	65 °C
Class I, Division 2, Groups A, B, C, D	T4A	T4
Class II, Division 2, Groups F, G	T6	T5
Class III	T6	T5

Two-Way Industrial Intercom (310X-MV)

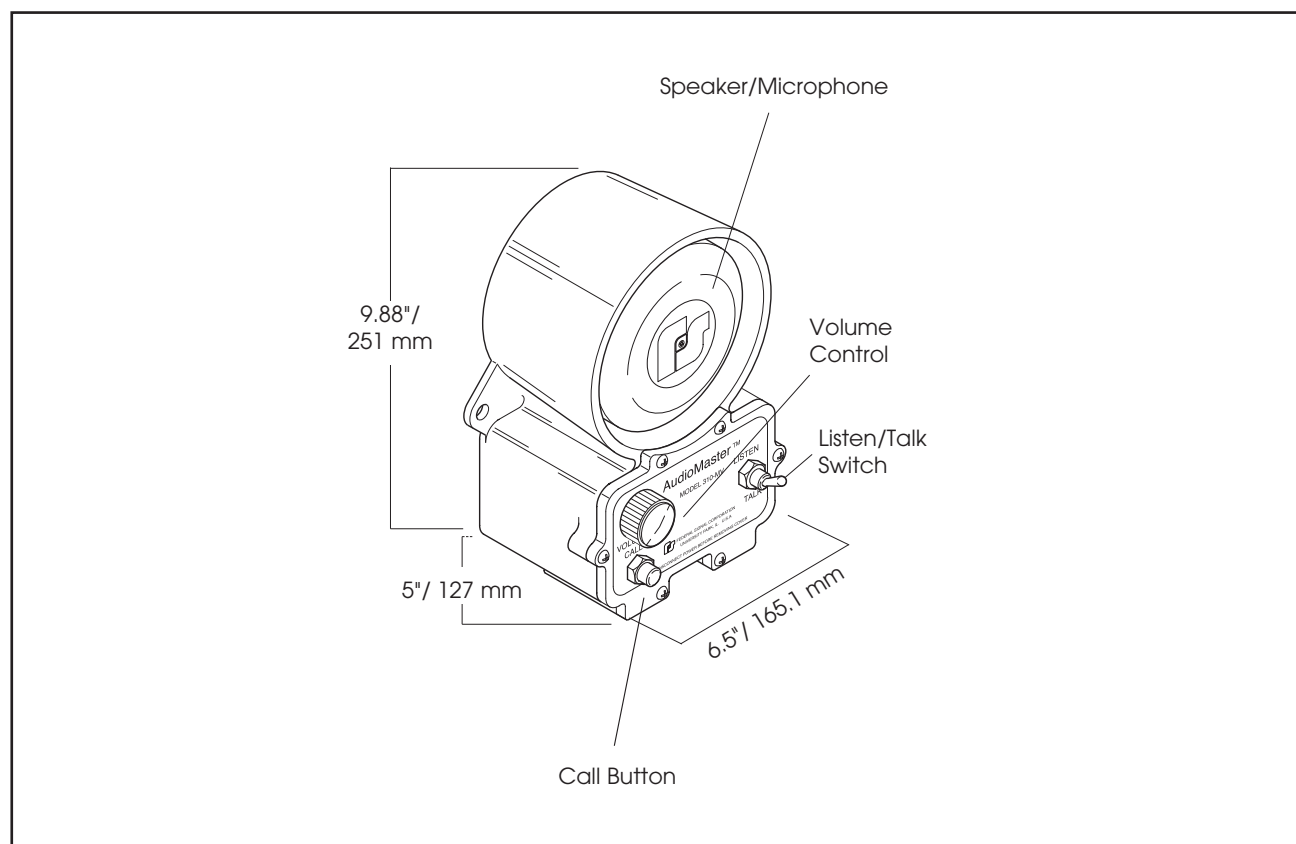

SPECIFICATIONS

Speaker Rating:	25 watt	
Operating Temperature:	-31°F to 149°F	-35°C to 65°C
Net Weight:	9.9 lbs.	4.5 kg
Shipping Weight:	11.5 lbs.	5.2 kg
Height:	9.88"	251.0 mm
Width:	6.5"	165.1 mm
Depth:	5.0"	127.0 mm

HOW TO ORDER

Specify Model:

310X-MV – Intercom, 24VDC/120VAC/240VAC, hazardous location, wall mount

REPLACEMENT PARTS

Description	Part Number
PC Board Assembly	K2001915C-02
Connector, 10 Pin	K140A326A-01
Resistors, 1K, 1W	K101216A
Gasket, rubber	K8590013B-01
Kit, potentiometer	K8590237A
Kit, toggle switch	K122A298A
Kit, call button and boot	K8590241A

OPTIONAL ACCESSORIES

Description	Part Number
Listen/Talk Kit	K8502017A