




GE
Lighting

72119 - F31T8SPX41/U/ECO


GE T8

Meets Federal Minimum Efficiency Standards

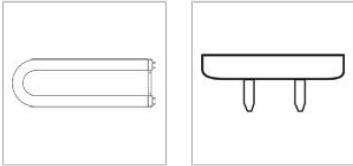


GRAPHS & CHARTS

Graphs_Lamp Mortality

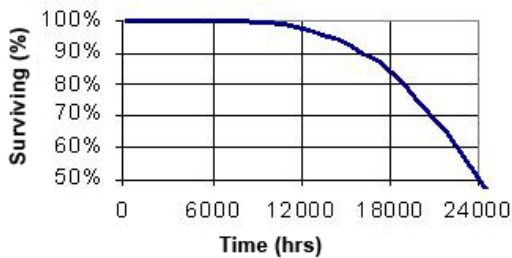

Graphs_Spectral Power Distribution

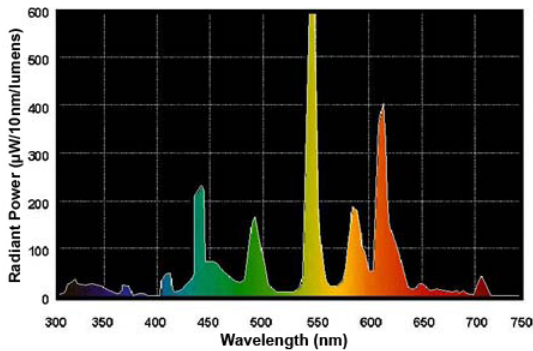

GENERAL CHARACTERISTICS

| | |
|----------------------------|--------------------------------------|
| Lamp Type | Linear Fluorescent - U-Shaped |
| Bulb | T8 |
| Base | Medium Bi-Pin (G13) |
| Rated Life | 24000.0 hrs |
| Bulb Material | Soda lime |
| Starting Temperature (MIN) | 15.0 °C |
| LEED-EB MR Credit | 103 picograms Hg per mean lumen hour |
| Primary Application | Full Wattage |

PHOTOMETRIC CHARACTERISTICS

| | |
|---------------------------------|----------|
| Initial Lumens | 2775.0 |
| Mean Lumens | 2440.0 |
| Nominal Initial Lumens per Watt | 89 |
| Color Temperature | 4100.0 K |
| Color Rendering Index (CRI) | 82.0 |

ELECTRICAL CHARACTERISTICS

| | |
|---------|------|
| Wattage | 31.0 |
|---------|------|

DIMENSIONS

| | |
|------------------------------|----------------------|
| Maximum Overall Length (MOL) | 22.5000 in(571.5 mm) |
| Nominal Length | 22.500 in(571.5 mm) |
| Bulb Diameter (DIA) | 1.000 in(25.4 mm) |

PRODUCT INFORMATION

| | |
|----------------------------------|------------------|
| Product Code | 72119 |
| Description | F31T8SPX41/U/ECO |
| Standard Package | Case |
| Standard Package GTIN | 10043168721193 |
| Standard Package Quantity | 15 |
| Sales Unit | Unit |
| No Of Items Per Sales Unit | 1 |
| No Of Items Per Standard Package | 15 |
| UPC | 043168721196 |