

Single Pole Devices and Temporary Power
 Series 16 - 300 and 400A, 600V AC/250V DC
Paralleling Tee

HUBBELL

Ordering Information

| Description | Device Color | UPC | Catalog Number |
|---|--------------|--------------|----------------|
| Paralleling "T" Connector (Female-Male-Male) | Black | 783585113104 | HBLPTBK |



Standards

UL 498 and UL1691
 UL Enclosure Types 3R, 4X, 12

Specifications


| | |
|------------------|-------------------------|
| Product Type | Ts" and Tri-Taps |
| Tee and Tap Type | Paralleling "T" Fitting |
| Body Material | Thermoplastic Elastomer |
| Contact Material | Brass |

Performance

| Electrical | |
|-----------------|----------------------------------|
| Amperage Rating | 400A Maximum |
| Voltage Ratings | 600V AC Maximum; 250V DC Maximum |

Mechanical

| | |
|------------------------|--|
| Product Identification | Ratings are a permanent part of the device |
|------------------------|--|

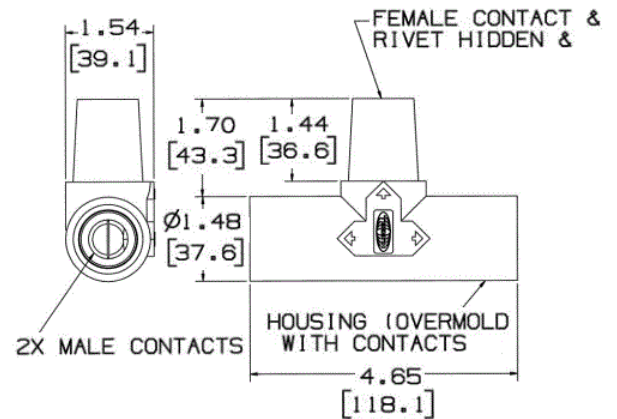

Online Resources

Customer Use Drawing
 eCatalog
 Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

