


Tight Buffer Distribution Interlock Armored Plenum Cable

Type OFCP, CSA FT-6

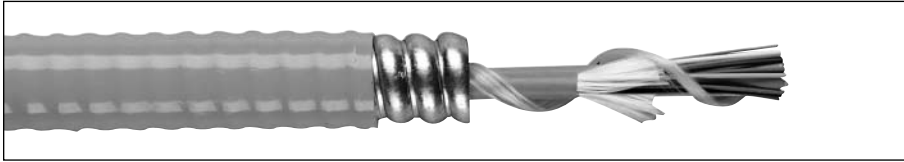

Product Construction:

Fiber:

- 4–144 fibers
- 900µm tight buffer
- Color-coding per TIA/EIA 598B

Overall Strength Member:

- Aramid fiber yarn

Inner Jacket:

- Flame-retardant material

Armor:

- Interlock aluminum (-ILPA)

Option:

- Interlock galvanized steel

Outer Jacket:

- Sequential footage markings*
- Orange jacket—multimode fibers (except 10 Gbps)
- Aqua jacket—10 Gbps multimode fibers
- Yellow jacket—singlemode fibers

Features:

- Interlock armor provides outstanding mechanical protection
- Interlock armor is flexible and easy to use
- Tight buffer provides individual fiber protection
- Sub-units are numbered for identification

Performance:

- Temperature: Storage -40°C (-40°F) to +70°C (+158°F) Operating -20°C (-4°F) to +70°C (+158°F)
- Minimum Bend Radius 20 X OD—Installation 10 X OD—In-Service
- Maximum Crush Resistance: 1,500 lbs/in (2,627 N/cm)

Applications:

- Harsh premises environments requiring heavy-duty protection
- ETL Type OFCP for installation in any premises location when installed in accordance with NEC article 770-51 (a) and 770-53 (a)

Compliances:

- ETL Listed Type OFCP
- CSA FT-6

Note:

Armored cable without an outer jacket available upon request (-IL)


*Sequential meter markings available upon request

CATALOG NUMBER	FIBER COUNT	NO. OF SUB-UNITS	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD				
			IN	mm	LBS/1000'	kg/km	INSTALLATION		IN-SERVICE		
								LBS	N	LBS	N
XX0021PNU-ILPA	2	—	0.50	12.7	80	119	550	2447	165	734	
XX0041PNU-ILPA	4	—	0.50	12.7	82	122	550	2447	165	734	
XX0061PNU-ILPA	6	—	0.50	12.7	84	125	550	2447	165	734	
XX0121PNU-ILPA	12	—	0.55	14.0	100	149	550	2447	165	734	
XX0241PNU-ILPA	24	—	0.65	16.5	138	205	550	2447	165	734	
XX0241PNU-ILPAS	24	2	0.70	17.8	136	202	1000	4448	300	1334	
XX0361PNU-ILPAS	36	3	0.73	18.5	158	235	1000	4448	300	1334	
XX0481PNU-ILPAS	48	4	0.80	20.3	209	311	1000	4448	300	1334	
XX0601PNU-ILPAS	60	5	0.85	21.6	187	278	1000	4448	300	1334	
XX0721PNU-ILPAS	72	6	0.95	24.1	273	406	1000	4448	300	1334	
XX0961PNU-ILPAS	96	8	1.05	26.7	328	488	1000	4448	335	1490	
XX1201PNU-ILPAS	120	10	1.10	27.9	372	554	1000	4448	335	1490	
XX1441PNU-ILPAS	144	12	1.20	30.5	386	574	1000	4448	335	1490	


XX Denotes glass type.

A complete listing of NextGen® Brand glass types is specified on page 3 of this catalog.

Typical Cross-Sections

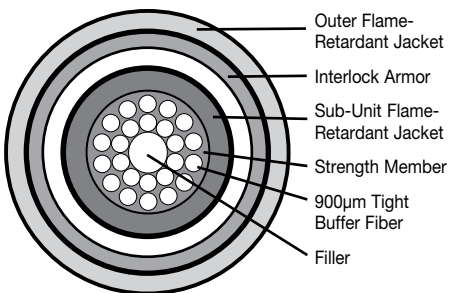

PNU-ILPA ≤ 24 Fiber

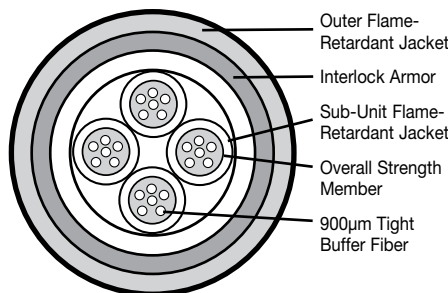

PNU-ILPAS ≥ 24 Fiber

Hybrid designs (containing singlemode and multimode fiber) and composite designs (containing copper conductors) are also available.

Ordering Part Number Example

CG0241PNU-ILPA or CG0241PNU-ILPAS

62.5 mm multimode, 24 fibers, tight buffer distribution interlock armor plenum Please see pages 4 and 5 for a complete guide on part number selection and ordering information.

