


# Electrical Load Center

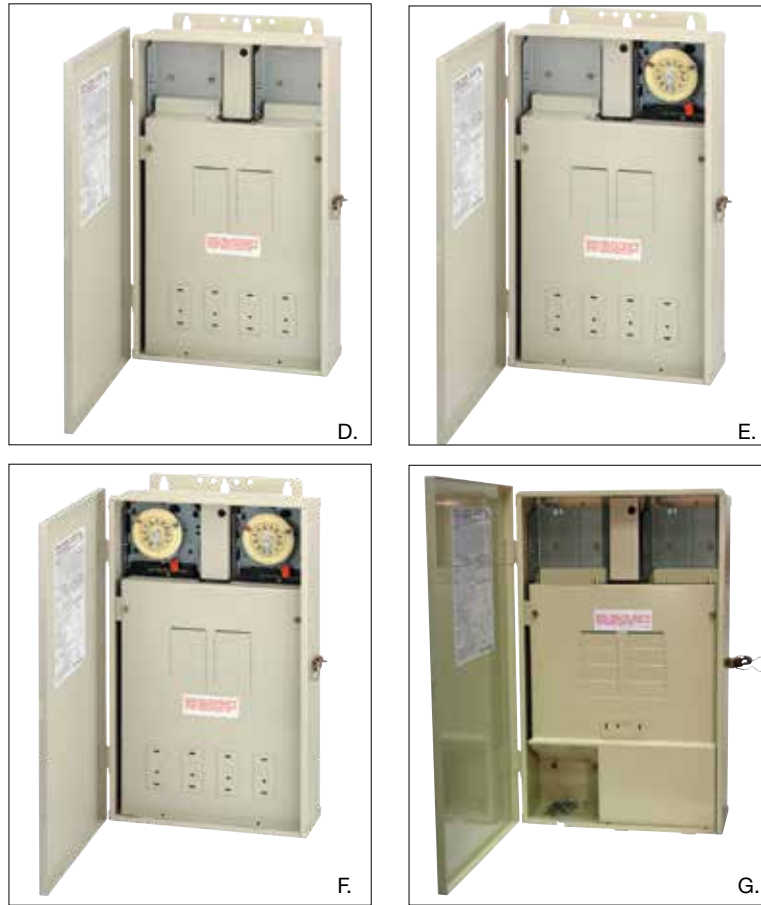

## T4000R Series 125 Amp Pool/Spa Control System with Type 3R Load Center

- Comes with an 8/16 circuit breaker base, equipment grounding bar, and mechanical time switch(es)
- Reduces installation costs
- All-in-one electrical load center eliminates the need for additional service panels
- Accepts any combination of PF1000M Series, P1403ME, P1353ME, P4043ME, P4243ME, T100M Series, or RC2000M Series mechanisms
- Fully compatible with all electrical requirements for pool/spa installations
- GFCI and switch mounting capabilities

### Ratings:

**Load Center Rating:** 125 A max. 120, 240 VAC or 120, 208 VAC single phase, 60 Hz.

### Switch Rating:

- 30 A Resistive/Inductive, Tungsten or 1000 VA Pilot Duty each pole 120, 208, 240 VAC
- 2 HP (24 FLA), 120 VAC
- 5 HP (28 FLA), 240 VAC

**Operating Temperature Range:** -40°F to 130°F (-40°C to 54°C)

**Load Center Dimensions:** 20 3/4" (52.7 cm) H x 12 3/4" (32.4 cm) W x 4 1/2" (11.43 cm) D

### Knockouts:

**Bottom:** (5) 1/2" - 3/4", (4) 1/2", (2) 3/4" - 1", 1 1/4"

**Left:** (1) 1/2" - 3/4"

**Back:** (4) 1/2" - 3/4", (2) 3/4" - 1"

**Right:** (1) 1 3/4" x 2 3/4" for mounting switches or GFCI

**Warranty:** 1 year

	Model #	Mechanism(s)	Switch	Mechanism Supply Voltage
D.	<b>T4000R</b>	Load Center	—	—
E.	<b>T40004R</b>	(1) T104M	DPST	240 VAC, 60 Hz
F.	<b>T40404R</b>	(2) T104M	DPST	240/240 VAC, 60 Hz
G.	<b>T40000R4</b>	Load Center with GCFI	—	—

See page 124 for further information on mechanisms.

Wiring devices may be installed in this load center (order (4) 21T156A standoffs for mounting). See page 154.

For replacement parts, trippers and accessories see page 153.