

Wall Packs

WMS Series

The WMS Series luminaire is ideal for entrances, walkways, underpasses, loading docks and recreation areas



Features:

- Dark bronze powder coat finish
- ½" tapped holes available for installing photocells (photocell not included)
- Fluorescent options available

Specifications:

Lens:	Polycarbonate lens and optional high impact and heat resistant tempered glass for greater protection
Construction:	Polycarbonate housing and optional heavy-duty die-cast aluminum housing with dark bronze powder coat finish. One piece anodized aluminum reflector for better light efficiency.
Lampholder:	Specification grade porcelain socket
Ballasts:	Quad-Tap - 120V / 208V / 240V / 277V Tri-Tap - 120V / 277V / 347V Fluorescent Ballast - 120V - 277V
Certification:	UL and cUL certified Suitable for wet locations

Dimensions:

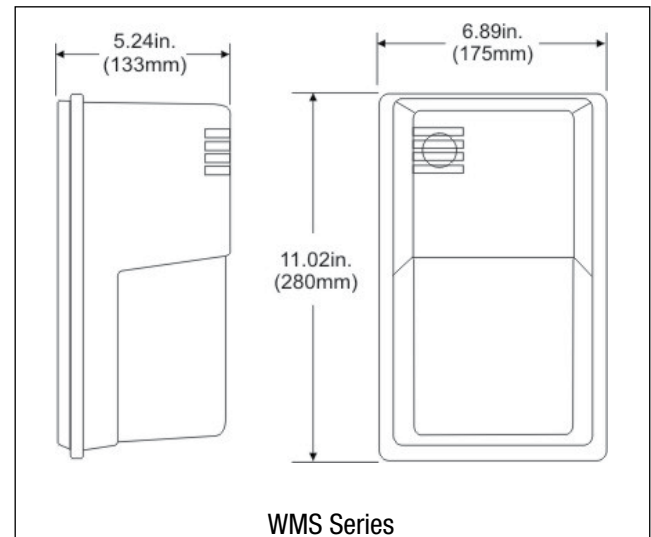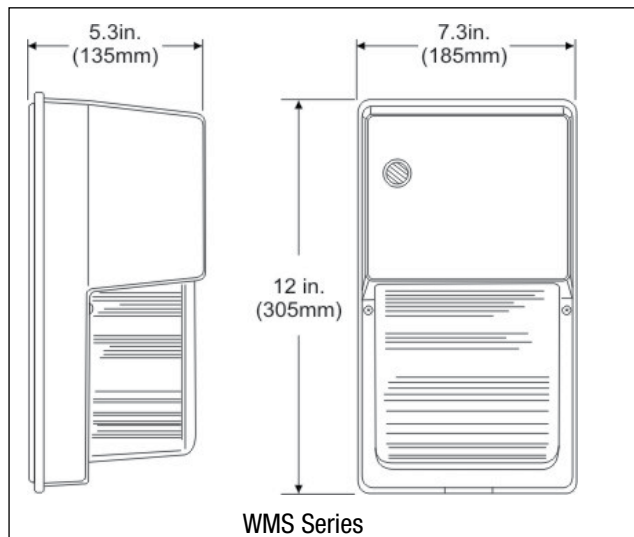

Project: _____

Location: _____

Product Type: _____

Contact/Phone: _____

Model #: _____



Ordering Information:

Series	Lamp/Watts	Volts	Housing/Lens	Options	Finish	
WMS	Metal Halide	120 - 120V (only available for High Pressure Sodium)	P - Polycarbonate Housing & Lens (not available for Metal Halide)	L - Lamp	No Suffix - Dark Bronze	
	50M 50 Watts	Q - Quad-Tap 120 / 208 / 240 / 277 VAC (Metal Halide only requires Glass)	G - Die-cast Aluminum (required for Metal Halide)	C - Photocontrol (Only for 120V)	WH - White	
	70M 70 Watts					
	100M 100 Watts					
	High Pressure Sodium	T - Tri-Tap 120 / 277 / 347 VAC (Metal Halide only requires Glass)				
	35H 35 Watts					
	50H 50 Watts	B - Fluorescent Ballast 120 - 277 VAC				
	70H 70 Watts					
	100H 100 Watts					
	Fluorescent					
142F (1) 42W CWL						

Photometrics:

WMS100MQGL
100 Watt Metal Halide Glass Lens
Wall Pack
9,000 Lumens
10 Foot Mounting Height

