

Cabinet Lighting Systems



CABINET | LINEAR | TASK | MOOD

Layer upon layer of beautiful light

A well-designed interior often employs three layers of light:

Ambient or general lighting serves as the base. It creates a space with workable light – but without much drama. The architecture and interior details often fall into the shadows and workspaces may not have sufficient illumination.

Accent lighting adds interest and depth to a space. An unlit tray ceiling looks flat and foreboding; when lit it commands attention. Over-cabinet lighting enlarges the visual perception of the room. Toekick lighting adds interest to the previously ignored floor. Lighted cabinets provide depth to the room. And well-placed pendants highlighting a counter add a stylish finishing touch to a room.

Task lighting helps illuminate areas where chores often take place – under a cabinet in a kitchen or over a desk in an office. It makes a dark space more useable and functional.





When layering with light, remember:

- Incorporate multiple switching options so the homeowner can use the light in a variety of ways: toe-kicks only at night, all lights on during entertaining, task and general lights on during food prep, etc.
- For larger rooms consider controlling regional areas separately.

Installation photo employs Design Pro LED Linear at island toe-kick, above cabinets and under the shelving. Design Pro LED Discs are inside each cabinet door. (4) 18" Design Pro LED Modular units are used under the cabinet. Kichler wall sconce 42009 PN. For other coordinating decorative items, please visit www.kichler.com.

Innovative Lighting Solutions



- | | | | |
|----|------------------------------------|----|---|
| 6 | Design Pro LED Linear | 27 | TaskWork Direct Wire 120 Volt Xenon |
| 10 | Design Pro LED Disc | 28 | TaskWork Modular 120 Volt Fluorescent |
| 14 | Design Pro LED Modular | 29 | TaskWork Direct Wire 120 Volt Fluorescent |
| 18 | Design Pro LED Direct Wire | 30 | TaskWork Bright Disc |
| 20 | TaskWork Modular 12 Volt Xenon | 32 | TaskWork Linear |
| 24 | TaskWork Modular 120 Volt Xenon | 36 | Selection Guide |
| 26 | TaskWork Direct Wire 12 Volt Xenon | 39 | Index, Awards & Notable Distinctions |



Everyday you look for innovative ways to complete a project. At Kichler, we're here to help. We think of the aesthetic possibilities, application opportunities and ease of installation that you need – and we design fixtures that exceed your every expectation. You'll find extended life and energy efficient options, low profile offerings and an array of designer finishes many backed by our limited warranties and 70 years of proven experience. Each is available when you need them through our authorized dealer network. From the newest, smartest LED options to traditional xenon and fluorescent choices ... you get an extensive selection of light layering products that help you create the utility, ambient, and architectural detail you deserve.



Installation photo employs Design Pro LED Linear at all toekicks. (4) 18" Design Pro LED Modular units are used under the cabinet. Kichler pendant 42384 MIZ. For other coordinating decorative items, please visit www.kichler.com.

Design Pro LED Linear

24 Volt DC

Precise lighting
that crosses
new lines





Advanced technology, superior optics and a pure, even flow of light are just few of the professional advancements you'll find with Kichler Design Pro LED. We've taken LED a step further than the rest, delivering high brightness, a cooler operating temperature and superior color rendering LED – no matter what the need.

Now, with Design Pro LED Linear, Kichler offers you the most flexible, easy-to-install and ultra-thin profile fixture – allowing you to put light anywhere you want it. Under a bed, inside a bookcase, over a cabinet, around a cove: the remarkably thin 1/4" unit hides and adjusts to almost any application. Think outside the box – and let LED Linear create a unique and impressive effect. Our linear choices are also energy efficient and last four times longer than xenon alternatives.

Installation photo employs 50' of Design Pro LED Linear including each shelf, around headboard and under platform bed. Kichler pendant 42420 NI.

Design Pro LED Linear

24 Volt DC



STEP

1

EASY TO INSTALL TRACK

Not required, but suggested to ensure straight runs

A 12330 BK, WH (10-pack)

- 3'-0" track section
- Snaps on the score every 6"
- Captive screws every 6"
- White or Black finish

AVAILABLE FINISHES

Black (BK) and White (WH)



STEP

2

SELECT LINEAR LENGTH OF LED AND FINISH

B 12320 BK, WH - 12'-0" spool of linear LED

- 2 LEDs per lighting pod
- 4 pods per foot
- 24-gauge wire between pods
- Section may be cut every 3"
- 4.2 Watts max per foot
- 2-3/8" L x 9/16" W x 1/4" H
- Snaps into track or can be installed directly, without track
- Center mounting hole will hold screw in place for ease of installation
- 24'-0" maximum length of linear lighting per run

Accessories

10299 - Box of Screws (100 pieces)

Nickel plated

10299 BK - Box of Screws (100 pieces) Black

STEP

3

CONNECTORS, JUNCTIONS AND WIRE TO TRANSITION FROM LIGHTS TO POWER SOURCE

C Wire Connector Clips

12332 BK - Male

12333 BK - Female

- Snaps onto blunt-cut wire – no need to split and strip wire
- Gender neutral



D Extension Wire

12323 BK, WH

- 50'-0" Roll
- 24-gauge (2 conductors)



E "T" Connector

12335 BK, WH

- Power can enter any of the ports and exit through the other two ports
- 180° or 90° split



F Interconnect Cable Transition Module

12338 BK, WH - Male to Female Connector

- Male interconnect plug transitions to female linear wire connector clip

12339 BK, WH - Female to Female Connector

- Female interconnect plug transitions to female linear wire connector clip



10 year limited warranty

For more details, visit www.kichler.com





STEP

4

SELECT POWER SUPPLY

G Undercabinet Power Supplies

12353 BK, WH - 50 Watt

- Compact undercabinet hard wire design
- 5" L x 5-1/2" W x 1" D
- Class 2 / 24 Volt DC
- Use with sheathed cable (12-2 or 14-2 with ground)
- Interconnect cable transition module needed to power LED linear system



Remote Power Supplies

12380 BK - 100 Watts

Remote Power Supply

- 11" H x 6-1/2" W x 3" D
- Includes (1) 100 Watt power supply
- Class 2 / 24 Volt DC



12382 BK - 200 Watts

Remote Power Supply

- 15-1/2" H x 11" W x 3" D
- Includes (2) 100 Watt power supplies
- Class 2 / 24 Volt DC



Power Supply Leads

12344 BK, WH - 25' length

12346 BK, WH - 8' length

- Should only be used to connect to Remote Power Supplies 12380 BK and 12382 BK.
- Note: Connect either the male or female plug to interconnect cable transition module. The plug on the other end is cut off and the two leads are connected to the terminals on the Remote Power Supply.
- Interconnect cable transition module needed to power LED linear system
- Class 2 jacket suitable to be run behind walls (please check local codes for compliance).



Plug-In Power Supplies

12383 BK, WH - 30 Watts

- 4' length
- 1 female connector, 12348 included
- Class 2 / 24 Volt DC
- Interconnect cable transition module needed to power LED linear system



12384 BK, WH - 60 Watts

- 4' length
- 1 female connector, 12348 included
- Class 2 / 24 Volt DC
- Interconnect cable transition module needed to power LED linear system

FLEXIBLE MOUNT DESIGN




FEATURES

- Low profile 1/4"
- Flexible installation
- Install with or without track
- Can be linked with LED strip and disc system
- Black and White finish
- cUL Listed Class 2

PERFORMANCE DATA (48" LENGTH MOUNTED TO FRONT OF CABINET)

	LUMENS/WATT	5.9
A	LIGHT OUTPUT FC (COUNTER FRONT)	6.5
B	LIGHT OUTPUT FC (COUNTER MIDDLE)	13.9
C	LIGHT OUTPUT FC (COUNTER BACK)	13.6
D	LIGHT OUTPUT FC (COUNTER WALL)	8.3
	CRI (COLOR RENDERING)	70
	CCT (COLOR TEMPERATURE)	3000K avg.
	LIGHT SOURCE LIFE	40,000 hrs.

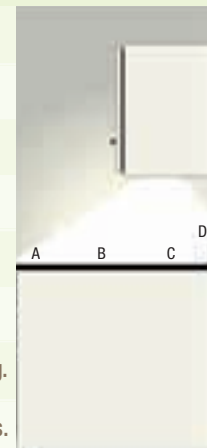

Design Pro LED Linear is not recommended for use as an undercabinet task light source. Data provided for comparative analysis.

Design Pro LED Disc

24 Volt DC Patent Pending

Beautiful color rendering all around



12310 NI
shown in Brushed Nickel



12310 BRZ
2-3/4" D x 3/8" H
Shown in Bronze
(actual size)



12310 WH
shown in White



12310 BK
shown in Black



limited lifetime warranty
 For more details, visit www.kichler.com

So sleek, they're practically invisible. So versatile, you'll find new application opportunities around and under every niche. Each unit offers you Design Pro's advanced technology, superior optics and a pure, even flow of light. Plus, an ultra thin 3/8" profile means there's no need to recess the fixture, and the cool operating temperature gives you beautiful light that can fit in even the smallest of spaces.


Installation is just as versatile: wiring ties into any Design Pro lighting configuration and each disc comes with the wiring pre-spoiled. Just pull out the wire length you need, and the rest will stay neatly tucked into place.



Installation photo employs Design Pro LED Discs placed close to wall surface to accentuate an array pattern on the tile surface. Design Pro LED Discs are inside each cabinet door.

Design Pro LED Disc

24 Volt DC Patent Pending

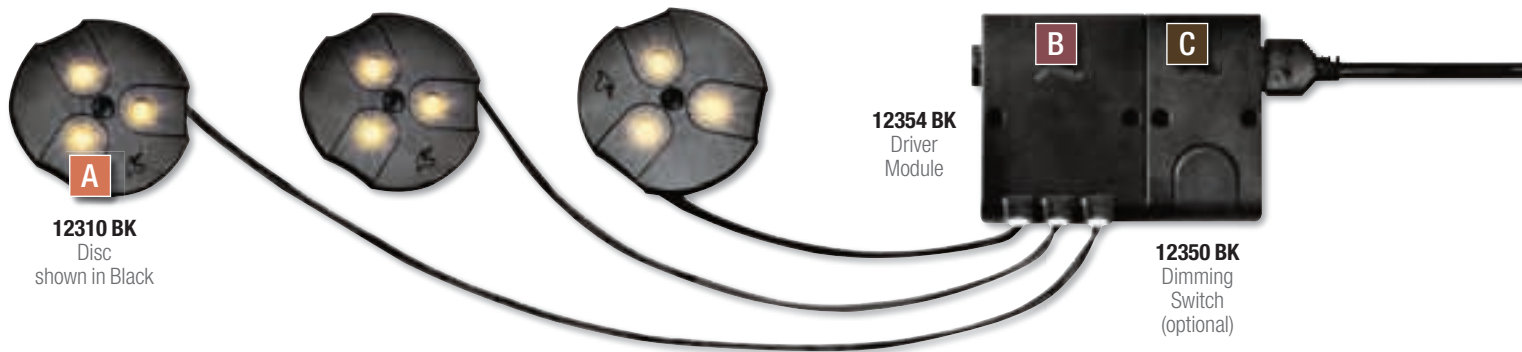

STEP

1

SELECT APPROPRIATE NUMBER OF DISCS & FINISH

STEP

2


DIMMING SWITCH & NIGHTLIGHT ALLOW FOR LIGHT LEVEL CONTROL

STEP

3

INTERCONNECT CABLES CONNECT MULTIPLE DESIGN PRO DISCS OR FIXTURES

- A**  **12310* BK, BRZ, NI, WH LED Disc**
- 3 High Brightness LEDs built in, 3 Watts
 - 2-3/4" D x 3/8" H
 - Unique spooled wire design (36")
 - Must be used with 12354 BK, WH Driver Module



- B** **Driver Module**
12354 BK, WH - LED Disc Driver
- Consumes 1 Watt
 - Connects up to three Design Pro LED Discs
 - Must be used with 12310 Design Pro LED Discs



- 12347 BK, WH LED Disc Wire Extension (optional)**
- Adds 3' of length for greater installation flexibility



- C** **Dimming Switch (optional)**
12350 BK, WH
- Consumes 1 Watt
 - 4 Positions (Off/Low/Medium/High)
 - Use to control light level
 - Installs directly to the supply lead or inline with fixtures
 - Use one per run
 - Will not control linear LED

Night Light Module (optional)

- 12351 BK, WH**
- Consumes 1 Watt
 - Must** be used with 12350 power switch
 - Use where low light level is desired for safety or convenience
 - Photo sensor activation
 - Installs directly to the supply lead or inline with fixtures



- D** The interconnect cables are listed Class 2 and connect multiple fixtures. Wire in accordance with Article 725 of the National Electric Code.
- 12341 BK, WH - Interconnect 9 Inches**
 - 12342 BK, WH - Interconnect 14 Inches**
 - 12343 BK, WH - Interconnect 21 Inches**
 - 12345 BK, WH - Interconnect 10 Feet**


- 12348 BK, WH - Female Connector**
- Female connectors join male ends together where necessary

- 12349 BK, WH - Male Connector**
- Male connectors join female ends together where necessary



AVAILABLE FINISHES

Bronze (BRZ), Brushed Nickel (NI), Black (BK) and White (WH)

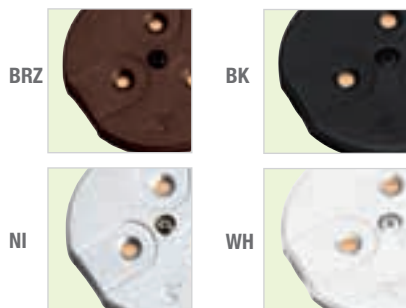

ULTRA THIN PROFILE



Typical 12V Xenon Disc



Kichler Design Pro Disc Ultra Thin 3/8" profile

limited lifetime warranty

For more details, visit www.kichler.com





Design Pro LED can be added as an option to the Design Pro LED Disc system and further expand the possibilities. See page 16 for more details.

STEP

4

SELECT POWER SUPPLY

E Undercabinet Power Supplies

12353 BK, WH - 50 Watt

- Compact undercabinet hard wire design
- 5" L x 5-1/2" W x 1" D
- Class 2 / 24 Volt DC
- Use with sheathed cable (12-2 or 14-2 with ground)



Remote Power Supplies

12380* BK - 100 Watts


- Remote Power Supply
- 11" H x 6-1/2" W x 3" D
- Includes (1) 100 Watt power supply
- Class 2 / 24 Volt DC



12382* BK - 200 Watts

Remote Power Supplies

- 15-1/2" H x 11" W x 3" D
- Includes (2) 100 Watt power supplies
- Class 2 / 24 Volt DC



Power Supply Leads

12344 BK, WH - 25' length

12346 BK, WH - 8' length

- Should only be used to connect to remote power supplies 12380 BK and 12382 BK.
- Note: Connect either the male or female plug to fixture, driver module or switch. The plug on the other end is cut off and the two leads are connected to the terminals on the remote power supply.
- Class 2 jacket suitable to be run behind walls (please check local codes for compliance).



Plug-In Power Supplies

12383 BK, WH - 30 Watts


- 4' length cord
- 1 female connector, 12348 included
- Class 2 / 24 Volt DC



12384 BK, WH - 60 Watts

- 4' length cord
- 1 female connector, 12348 included
- Class 2 / 24 Volt DC

DESIGN PRO LED DISC

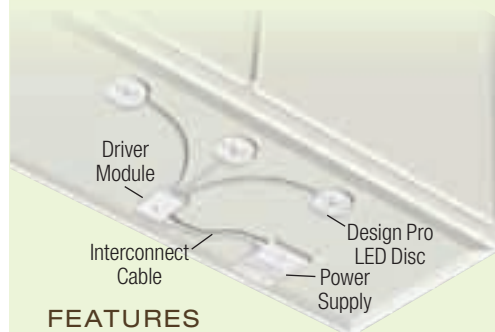


FEATURES

- Ultra thin 3/8" Profile x 2-3/4" D
- Color Rendering Index >90
- High brightness LED
- Higher efficiency
- 3000K correlated color temperature ±150K
- Long life light source (40,000 Hours)
- Captive screws for ease of installation
- Class 2 Listed

PERFORMANCE DATA (12310)

TOTAL WATTAGE	4
LUMENS/WATT	36.5
A LIGHT OUTPUT FC (COUNTER FRONT)	8.6
B LIGHT OUTPUT FC (COUNTER MIDDLE)	37.7
C LIGHT OUTPUT FC (COUNTER BACK)	53.5
D LIGHT OUTPUT FC (COUNTER WALL)	25.2
CRI (COLOR RENDERING)	>90
CCT (COLOR TEMPERATURE)	3000K avg.
LIGHT SOURCE LIFE	40,000 hrs.

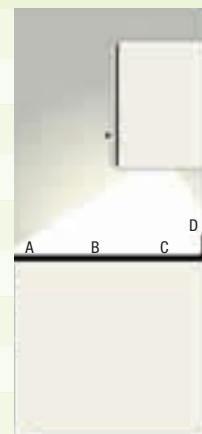

*Kichler Design Pro LED Undercabinet and Disc System meets ENERGY STAR Requirements when used with our remote power supplies 12380BK and 12382BK, a minimum of any 3 fixtures, and a minimum of 20 Watts.


Design Pro LED Modular

24 Volt DC Patent Pending

See true colors
without seeing
a thing



12301 NI
6" L x 3-1/4" W x 1/2" H
shown in Brushed Nickel
(actual size)

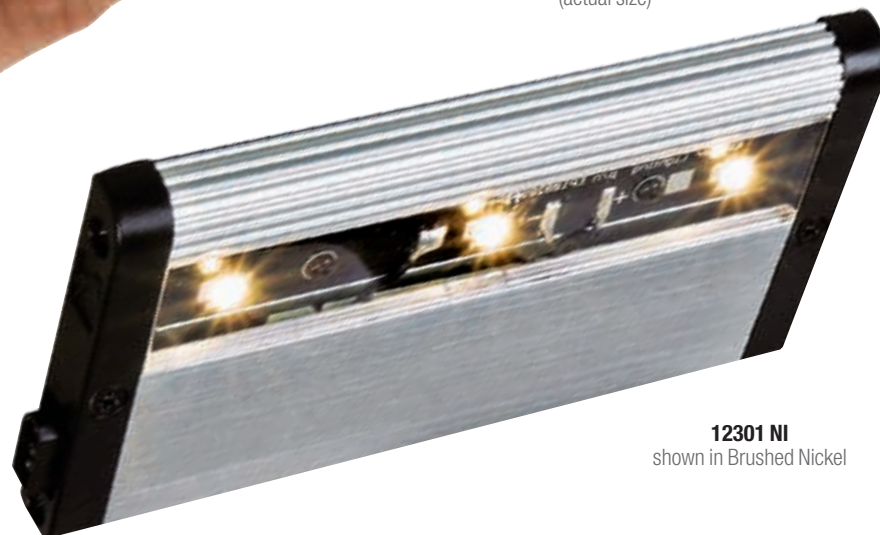

12301 NI
shown in Brushed Nickel



limited lifetime warranty
 For more details, visit www.kichler.com

So thin and clean – all you’ll see is the beautiful light. A remarkably sleek unit tucks cleanly under cabinets, so all homeowners see is the warm white light they demand. Best of all, it delivers the ultimate in energy savings and 40,000 hours of life: an unprecedented amount when compared with alternatives such as fluorescent and xenon. It’s efficient for builders, remodelers and other professionals looking to build today’s residential and commercial structures with products that are Energy Star qualified and can support LEEDs certification and National Green Building Standards.



Kichler’s LED > High Color Rendering Index vs.




Competitor’s LED



Installation photo employs Design Pro LED Linear under the shelving. Design Pro LED Discs are inside each cabinet door. (2) 18" Design Pro LED Modular units are used under the cabinet.

Design Pro LED Modular

24 Volt DC Patent Pending

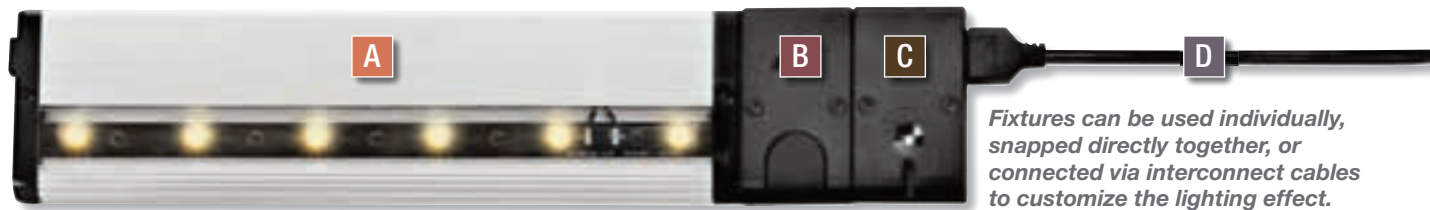

Fixtures can be used individually, snapped directly together, or connected via interconnect cables to customize the lighting effect.

12303 NI
Fixture

12350 BK
Dimming
Switch

12351 BK
Nightlight

STEP

1

SELECT APPROPRIATE LIGHT FIXTURE SIZES & FINISH

STEP

2

DIMMING SWITCH & NIGHTLIGHT ALLOW FOR LIGHT LEVEL CONTROL

STEP

3

INTERCONNECT CABLES CONNECT MULTIPLE FIXTURES

- E**  **12301* BRZ, NI, WH**
- 3 High Brightness LEDs built in, 4 Watts
 - 6" L x 3-1/4" W x 1/2" H 6"

- A**  **12303* BRZ, NI, WH**
- 6 High Brightness LEDs built in, 7 Watts
 - 12" L x 3-1/4" W x 1/2" H 12"

-  **12305* BRZ, NI, WH**
- 9 High Brightness LEDs built in, 10 Watts
 - 18" L x 3-1/4" W x 1/2" H 18"

- B** **Dimming Switch (optional)**
12350 BK, WH
- Consumes 1 Watt
 - 4 Position (Off/Low/Medium/High) Use to control light level
 - Installs directly to the supply lead or inline with fixtures
 - Use one per run
 - Will not control linear LED


- C** **Night Light Module (optional)**
12351 BK, WH
- Consumes 1 Watt
 - Must** be used with 12350 Power Switch
 - Use where low light level is desired for safety or convenience
 - Photo sensor activation
 - Installs directly to the supply lead or inline with fixtures

- D** The interconnect cables are listed Class 2 and connect multiple fixtures. Wire in accordance with Article 725 of the National Electric Code.
- 12341 BK, WH - Interconnect 9 Inches**
 - 12342 BK, WH - Interconnect 14 Inches**
 - 12343 BK, WH - Interconnect 21 Inches**
 - 12345 BK, WH - Interconnect 10 Feet**

- 12348 BK, WH - Female Connector**
- Female connectors join male ends together where necessary
- 12349 BK, WH - Male Connector**
- Male connectors join female ends together where necessary

AVAILABLE FINISHES

Bronze (BRZ), Brushed Nickel (NI) and White (WH)

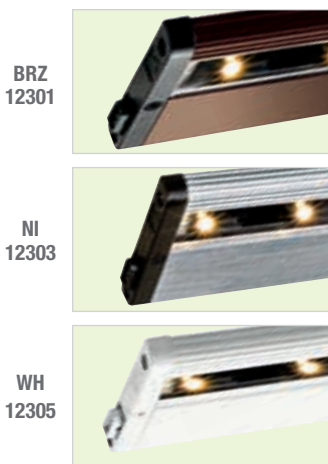

limited lifetime warranty

For more details, visit www.kichler.com





12301 NI
Fixture

12354 BK
Driver Module,
see page 12

12310 BK
Design Pro
LED Disc, see
page 12

STEP

4

SELECT POWER SUPPLY

Design Pro LED Disc can be added to the Design Pro LED system to further expand the possibilities. See page 12 for more details.

F Undercabinet Mounted Power Supply

12353 BK, WH - 50 Watt

- Compact undercabinet hard wire design
- 1" H x 5" W x 5-1/2" D
- Class 2 / 24 Volt DC
- Use with sheathed cable (12-2 or 14-2 with ground)



Plug-In Power Supplies

12383 BK, WH - 30 Watts

- 4' length cord
- 1 female connector, 12348 included
- Class 2 / 24 Volt DC



Remote Power Supply

12380* BK - 100 Watt

- 11" H x 6-1/2" W x 3" D
- Includes (1) 100 Watt power supply
- Class 2 / 24 Volt DC



12382* BK - 200 Watt

- 15-1/2" H x 11" W x 3" D
- Includes (2) 100 Watt power supplies
- Class 2 / 24 Volt DC



Power Supply Leads

12344 BK, WH - 25' length


12346 BK, WH - 8' length

- Should only be used to connect to remote power supplies 12380 BK and 12382 BK.
- Connect either the male or female plug to fixture or switch. The plug on the other end is cut off and the two leads are connected to the terminals on the remote power supply.
- Class 2 jacket suitable to be run behind walls (please check local codes for compliance).



12353 BK
Undercabinet
Mounted
Power Supply
(hard wire)

FRONT MOUNT DESIGN

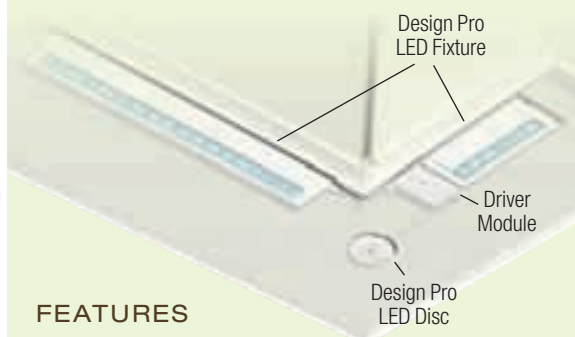

FEATURES

- Ultra Thin 1/2" Profile
- Color Rendering Index >90 CRI
- High brightness LED
- Higher efficiency
- 3000K correlated color temperature average is similar to Xenon
- Long life light source (40,000 Hours)
- Ability to snap fixtures together or interconnect to create an even flow of light
- Captive screws for ease of installation
- Class 2 Listed

PERFORMANCE DATA (12303)

TOTAL WATTAGE	7	
LUMENS/WATT	42	
A LIGHT OUTPUT FC (COUNTER FRONT)	26.1	
B LIGHT OUTPUT FC (COUNTER MIDDLE)	53.1	
C LIGHT OUTPUT FC (COUNTER BACK)	62.1	
D LIGHT OUTPUT FC (COUNTER WALL)	34.6	
CRI (COLOR RENDERING)	>90	
CCT (COLOR TEMPERATURE)	3000K avg.	
LIGHT SOURCE LIFE	40,000 hrs.	



*Kichler Design Pro LED undercabinet and disc system meets ENERGY STAR Requirements when used with our remote power supplies 12380BK and 12382BK, a minimum of any 3 fixtures, and a minimum of 20 Watts.

Design Pro LED Direct Wire

120 Volt Patent Pending



Energy efficiency anywhere

Kichler Design Pro LED Direct Wire delivers high-tech LED at a value. It's proof that unprecedented long life, unmatched energy savings and beautiful light don't have to break the bank.

AVAILABLE FINISHES

Bronze (BZ), Stainless Steel (SS) and White (WH)

BZ



SS



WH




Installation photo employs Design Pro LED Linear at island toekick and above cabinets. (4) 6" Design Pro LED Direct Wire units are used under the cabinet and shelving.



12053 SS

BACK MOUNT DESIGN

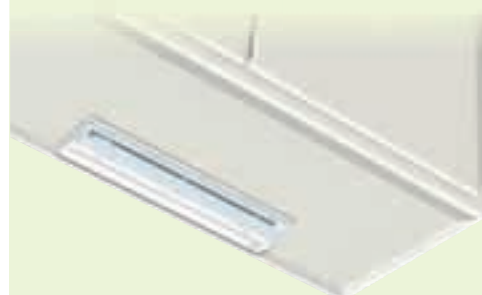


FEATURES

- Color Rendering Index – mid 80's
- High brightness LED
- High efficiency
- 3000K correlated color temperature average ±150K is similar to Xenon
- Long life light source (40,000 Hours)
- 1" Profile x 4-1/2" W
- Hinged assembly
- Keyhole mounting
- Multiple KO's for installation ease
- Side KO's for optional end-to-end assembly
- UL listed NM & BX single cable connector included
- On-off Switch
- Built-in driver
- cUL Listed

PERFORMANCE DATA (12052)

	LUMENS/WATT	38.1
A LIGHT OUTPUT FC (COUNTER FRONT)	14.3	
B LIGHT OUTPUT FC (COUNTER MIDDLE)	31.8	
C LIGHT OUTPUT FC (COUNTER BACK)	49.5	
D LIGHT OUTPUT FC (COUNTER WALL)	17.7	
CRI (COLOR RENDERING)	mid 80's	
CCT (COLOR TEMPERATURE)	3000K avg.	
LIGHT SOURCE LIFE (HRS)	40,000	

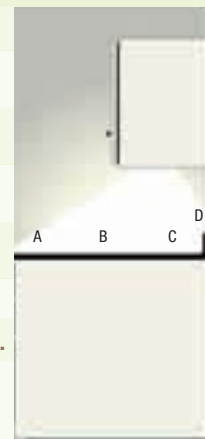

STEP 1

SELECT APPROPRIATE LIGHT FIXTURE SIZE & FINISH. DETERMINE DIRECT WIRE OR CORD & PLUG POWER SUPPLY.

- A 12051* BZ, SS, WH**
- 1 High Brightness LED built in
 - 4 Watts
 - 6" L x 4-1/2" W x 1" H

- 12052 BZ, SS, WH**
- 2 High Brightness LED built in
 - 6.4 Watts
 - 12" L x 4-1/2" W x 1" H

- 12053* BZ, SS, WH**
- 3 High Brightness LED built in
 - 9.3 Watts
 - 22" L x 4-1/2" W x 1" H

- 12054 BZ, SS, WH**
- 4 High Brightness LED built in
 - 12.4 Watts
 - 30" L x 4-1/2" W x 1" H

*2008 CALIFORNIA TITLE 24 COMPLIANT.

Accessories

10582 WH – 38" Power Cord and Plug Accessory (not shown)

- B 10588 SI – Duplex BX Cable Connector**
- Connects two cables to any convenient wireway knockout located on the fixture. This allows for a group of fixtures to be wired in series, using a single knockout. Connector is listed for use with 14-2 steel armored cable, 3/8 trade size reduced wall flexible steel, aluminum conduit or steel flexible metal conduit (not shown)

10589 SI – Connector for NM & BX Cable

- UL listed for both non-metal (NM) or BX cables
- Connects a single cable to any convenient wireway knockout located on the fixture

limited lifetime warranty

For more details, visit www.kichler.com



TaskWork Modular & Direct Wire

Xenon & Fluorescent

A proven classic
for any space



12213 BZ
shown in Bronze



Wherever you need to take light, our TaskWork Modular & Direct Wire fixtures can accommodate. They feature tried and true long life xenon or fluorescent technology that offers both direct wire and plug-in configurations for modular installation. Plus, the broad selection comes in multiple sizes and finishes for maximum design and application flexibility. Put task or ambient lighting where it's needed — while staying within budget.

Installation photo employs (5) 7" TaskWork 12V Direct Wire units under each cabinet section. TaskWork 12V Direct Wire units are assembled end-to-end for a continuous light flow over cabinets.

TaskWork Modular

12 Volt Xenon



A

10563 BRZ
Fixture
shown in Bronze

Fixtures can be used individually, snapped directly together, or connected via interconnect cables to customize the lighting application.

STEP

1

SELECT APPROPRIATE LIGHT FIXTURE SIZE & FINISH

Starter Kit

10568 BRZ, NI, WH

- 1 light, 14" Interconnect Cable and Wire Module
- 12 Volt, 18 Watt Xenon bulb included
- 7" L x 5" W x 1" H



10567 BRZ, NI, WH

- 2 light, 14" Interconnect Cable and Wire Module
- 12 Volt, 18 Watt Xenon bulbs included
- 13" L x 5" W x 1" H



10566 BRZ, NI, WH

- 3 light, 21" Interconnect Cable and Wire Module
- 12 Volt, 18 Watt Xenon bulbs included
- 22" L x 5" W x 1" H



10585 BRZ, NI, WH

- 4 light, 21" Interconnect Cable and Wire Module
- 12 Volt, 18 Watt Xenon bulbs included
- 30-1/2" L x 5" W x 1" H



10570 BK, WH
Wire Module
shown in White



AVAILABLE FINISHES

Bronze (BRZ), Nickel (NI) and White (WH)



BRZ



NI



WH

Modular (Fixture Only) Xenon

C 10565 BRZ, NI, WH

- 1 light, 7" L x 5" W x 1" H
- 12 Volt, 18 Watt Xenon bulb included

7"

10564 BRZ, NI, WH

- 2 light, 13" L x 5" W x 1" H
- 12 Volt, 18 Watt Xenon bulbs included

13"

A 10563 BRZ, NI, WH

- 3 light, 22" L x 5" W x 1" H
- 12 Volt, 18 Watt Xenon bulbs included

22"

10587 BRZ, NI, WH

- 4 light, 30-1/2" L x 5" W x 1" H
- 12 Volt, 18 Watt Xenon bulbs included

30-1/2"

Modular Accessories

E 10570* BK, WH – Wire Module

- 7-3/4" L x 2-5/8" W x 1" H
- Provides for safe, push-in wiring without the use of wire connectors
- Interconnect cables easily join wire module and fixtures
- Integrated supply wire strain relief for one or two wires
- Snap-on cover
- Use for hard-wire installation
- Use with sheathed cable (12-2 or 14-2 with ground)

D 10569 BRZ, NI, WH**

Master Switch (optional)

- 3-1/2" L x 5" W x 1" H
- Can be installed between the wiring module and the first fixture to control the entire system. Or, it can be positioned between fixtures to control those fixtures located after it in line.

10575 BRZ, NI, WH**

Plug-in Master Switch (optional)

- 3-1/2" L x 5" W x 1" H
- Allows control of cabinet lighting without accessing house wiring




10575 BRZ, NI, WH
Plug-In Master Switch
shown in White

* For use only with Kichler interconnect cables as part of TaskWork Modular systems

** For use only with Kichler interconnect cables as part of TaskWork Modular systems. Note, too, that switch assembly will plug directly into the side of any TaskWork Modular fixture. This eliminates the need to use an interconnect cable. Check mounting location for adequate space



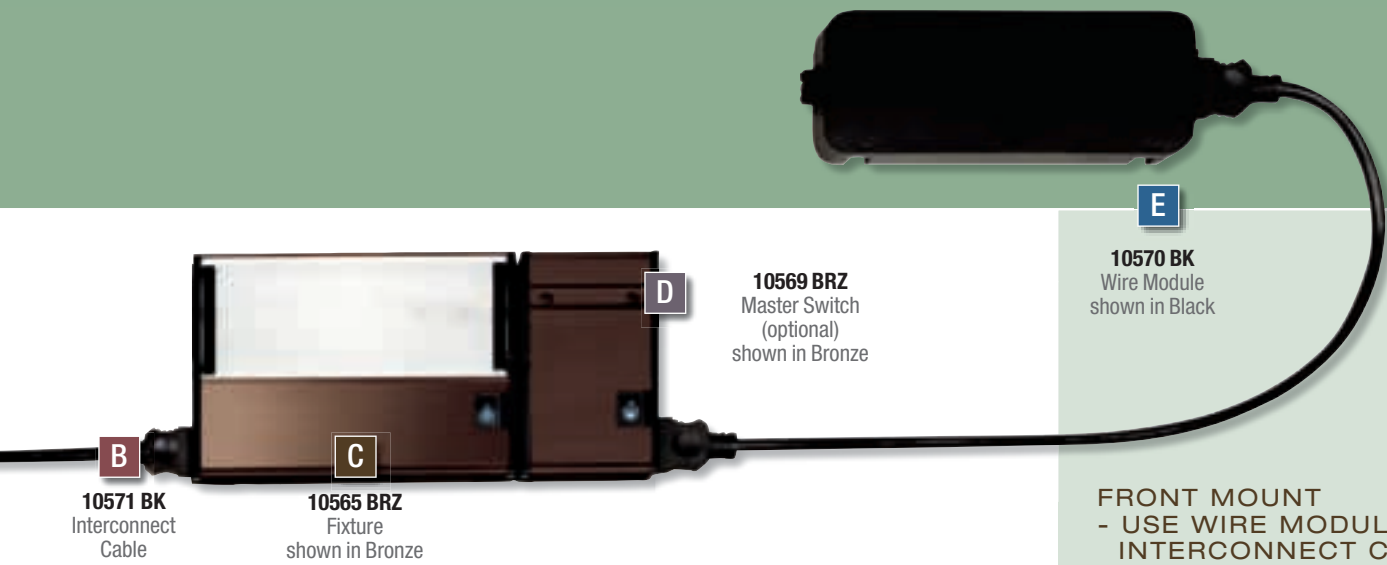

10571 BK
Interconnect
Cable


10565 BRZ
Fixture
shown in Bronze

10569 BRZ
Master Switch
(optional)
shown in Bronze

10570 BK
Wire Module
shown in Black

STEP 2 INTERCONNECT CABLES CONNECT MULTIPLE FIXTURES

FRONT MOUNT - USE WIRE MODULE AND INTERCONNECT CABLES

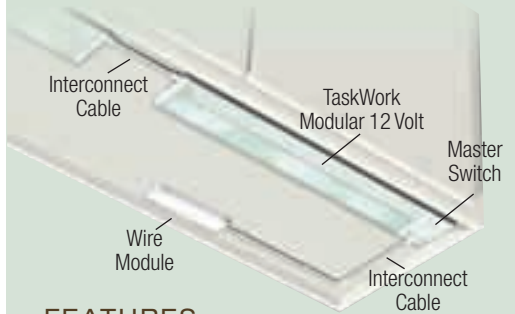

Cord & Plug Fixture Xenon 10562 WH

- 1 light, 7" L x 5" W x 1" H, 36" power cord
- 12 Volt, 18 Watt Xenon bulb included



10561 WH

- 2 light, 13" L x 5" W x 1" H, 36" power cord
- 12 Volt, 18 Watt Xenon bulbs included




10560 WH

- 3 light, 22" L x 5" W x 1" H, 36" power cord
- 12 Volt, 18 Watt Xenon bulbs included



10586 WH

- 4 light, 30-1/2" L x 5" W x 1" H 36" power cord
- 12 Volt, 18 Watt Xenon bulbs included



Replacement Bulbs 10574 CLR - Replacement Bulb

- 12 Volt, 18 Watt Xenon, clear

- B 10571 BK, WH – Interconnect 9 Inches**
- 10572 BK, WH – Interconnect 14 Inches**
- 10573 BK, WH – Interconnect 21 Inches**

- For longer interconnect cable lengths, multiple cables may be connected together



10571 BK, WH
Interconnect Cable
shown in White



10572 BK, WH
Interconnect Cable
shown in White




10573 BK, WH
Interconnect Cable
shown in White

FEATURES

- 1" Profile x 5" W
- 12 Volt, 18 Watt Xenon bulb(s) included
- Unique front-mount design as recommended by the American Lighting Association
- Ability to snap fixtures together to create an even flow of light
- Captive screws for ease of installation
- Durable, Anodized Brushed Bronze, Nickel or Powder-Coated White finish
- Extruded aluminum construction
- Hinged tempered glass diffuser
- High/Low/On-Off Switch
- Built-in electronic transformer
- cUL Listed

PERFORMANCE DATA (10564)

	LUMENS/WATT	6
A	LIGHT OUTPUT FC (COUNTER FRONT)	21.3
B	LIGHT OUTPUT FC (COUNTER MIDDLE)	45.6
C	LIGHT OUTPUT FC (COUNTER BACK)	59.4
D	LIGHT OUTPUT FC (COUNTER WALL)	29.5
	CRI (COLOR RENDERING)	100
	CCT (COLOR TEMPERATURE)	2700K
	LIGHT SOURCE LIFE (HRS)	10,000

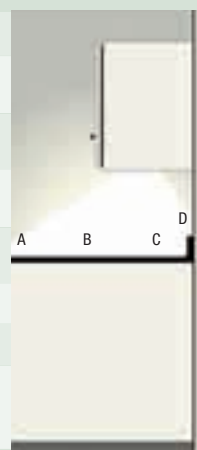

TaskWork Modular

120 Volt Xenon

12213 SS
 Fixture shown in
 Brushed Stainless Steel

*Fixtures can be used individually, snapped
 directly together, or connected via interconnect
 cables to customize the lighting effect.*



STEP

1

**SELECT
 APPROPRIATE
 LIGHT FIXTURE
 SIZE & FINISH**

STEP

2

**INTERCONNECT
 CABLES CONNECT
 MULTIPLE FIXTURES**

STEP

3

**SELECT APPROPRIATE
 LIGHT FIXTURE SIZE
 & FINISH OF EACH
 ADDITIONAL FIXTURE**

C 12211 BZ, SS, WH

- 1 light, 7" L x 5" W x 1" H
- 120 Volt, 20 Watt Xenon bulb included

7"

12212 BZ, SS, WH

- 2 light, 13" L x 5" W x 1" H
- 120 Volt, 20 Watt Xenon bulbs included

13"

A 12213 BZ, SS, WH

- 3 light, 22" L x 5" W x 1" H
- 120 Volt, 20 Watt Xenon bulbs included

22"

12214 BZ, SS, WH

- 4 light, 30" L x 5" W x 1" H
- 120 Volt, 20 Watt Xenon bulbs included

30"

12215 BZ, SS, WH

- 5 light, 40" L x 5" W x 1" H
- 120 Volt, 20 Watt Xenon bulbs included

40"

B 10571 BK, WH – Interconnect 9 Inches
10572 BK, WH – Interconnect 14 Inches
10573 BK, WH – Interconnect 21 Inches

- For longer interconnect cable lengths, multiple cables may be connected together



10571 BK, WH
 Interconnect Cable
 shown in White




10572 BK, WH
 Interconnect Cable
 shown in White




10573 BK, WH
 Interconnect Cable
 shown in White

AVAILABLE FINISHES

*Bronze (BZ), Brushed Stainless Steel (SS)
 and White (WH)*



Back of wall or unique front-mount design as recommended by the American Lighting Association

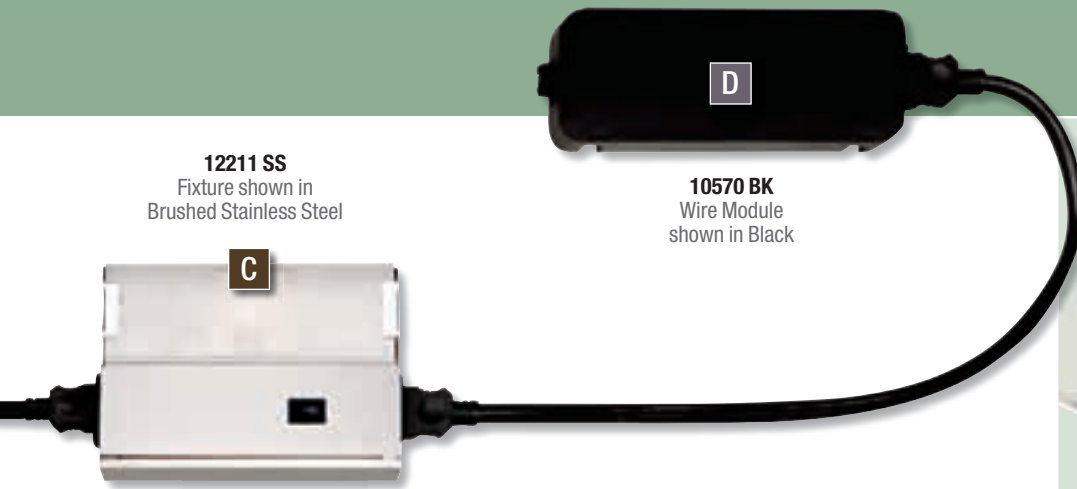


12211 SS
Fixture shown in
Brushed Stainless Steel

10570 BK
Wire Module
shown in Black

**BACK OF WALL
- DIRECT WIRE CONNECT**




**FRONT MOUNT
- USE WIRE MODULE AND INTERCONNECT CABLES**

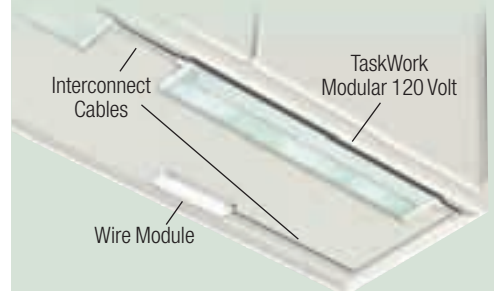

STEP
**4 POWER TO SYSTEM
WITH WIRE MODULE
(OPTIONAL)**

D 10570 BK, WH – Wire Module

- 7-3/4" L x 2-5/8" W x 1" H
- Provides for safe, push-in wiring without the use of wire connectors
- Interconnect cables easily join wire module and fixtures
- Integrated supply wire strain relief for one or two wires
- Snap-on cover
- Use for hard-wire installation
- Use with sheathed cable (12/2 or 14/2 with ground)

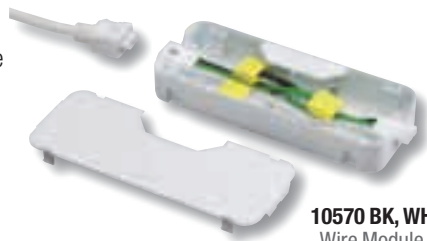

10570 BK, WH
Wire Module
shown in White

FEATURES

- 1" Profile x 5" W
- 120 Volt, 20 Watt Xenon bulb(s)
- Direct wire or inter-connectability
- Ability to snap fixtures together to create an even flow of light
- Durable Anodized Bronze, Brushed Stainless Steel or Powder-Coated White finish
- High/Low/On-Off Switch
- cUL Listed
- UL listed NM & BX single cable connector included

PERFORMANCE DATA (12212)

LUMENS/WATT	5	
A LIGHT OUTPUT FC (COUNTER FRONT)	14.6	
B LIGHT OUTPUT FC (COUNTER MIDDLE)	28.7	
C LIGHT OUTPUT FC (COUNTER BACK)	37.0	
D LIGHT OUTPUT FC (COUNTER WALL)	19.6	
CRI (COLOR RENDERING)	100	
CCT (COLOR TEMPERATURE)	2620K	
LIGHT SOURCE LIFE (HRS)	2,500	




Installation photo employs TaskWork 120V Modular under each cabinet section.

TaskWork Direct Wire

12 Volt Xenon

10584 BZ
Fixture
shown in Bronze

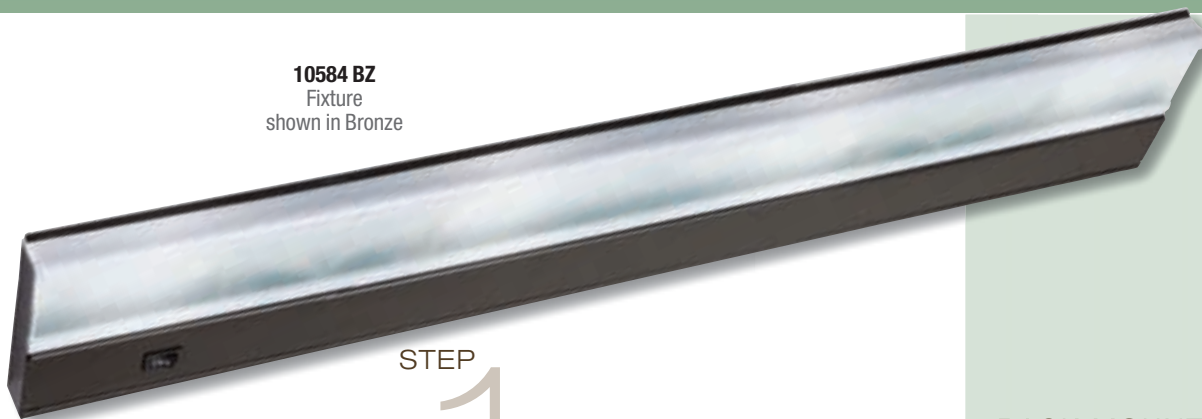

STEP

1
**SELECT APPROPRIATE LIGHT
FIXTURE SIZE & FINISH.
DETERMINE DIRECT WIRE OR
CORD & PLUG POWER SUPPLY.**

10579 BZ, SS, WH 7"

- 1 light, 7" L x 5" W x 1" H
- 12 Volt, 18 Watt Xenon bulb included

10580 BZ, SS, WH 12-1/4"

- 2 light, 12-1/4" L x 5" W x 1" H
- 12 Volt, 18 Watt Xenon bulbs included

10581 BZ, SS, WH 22-1/2"

- 3 light, 21-1/2" L x 5" W x 1" H
- 12 Volt, 18 Watt Xenon bulbs included

10584 BZ, SS, WH 30"

- 4 light, 30" L x 5" W x 1" H
- 12 Volt, 18 Watt Xenon bulbs included

10595 BZ, SS, WH 40"

- 5 light, 40" L x 5" W x 1" H
- 12 Volt, 18 Watt Xenon bulbs included

Accessories

**10582 WH - 38" Power Cord and Plug
Accessory (not shown)**

10588 SI - Duplex BX Cable Connector

- Connects two cables to any convenient wireway knockouts located on the fixture. This allows for a group of fixtures in a series using a single knockout. Connectors listed for use with 14-2 steel armored cable, 3/8" trade size reduced wall flexible steel, aluminum conduit or steel flexible metal conduit (not shown)

10589 SI - Connector for NM & BX Cable

- **UL approved for both non-metal (NM) & BX cables**
- Connects a single cable convenient wireway knockouts located on the fixture (not shown)

Replacement Bulbs

10574 CLR - Replacement Bulb

- 12 Volt, 18 Watt Xenon, clear

BACK MOUNT DESIGN




FEATURES

- 1" Profile x 5" W
- 12 Volt, 18 Watt Xenon bulb(s) included
- Durable, Brushed Stainless Steel, Powder-Coated White or Bronze finishes
- Fastener-free hinge assembly
- Keyhole mounting
- Easy-lock poly-tempered glass diffuser
- UL listed NM & BX single cable connector included
- High/Low/On-Off Switch
- Built-in electronic transformer
- cUL Listed

PERFORMANCE DATA (10580)



	LUMENS/WATT	6.1
A LIGHT OUTPUT FC (COUNTER FRONT)	14.1	
B LIGHT OUTPUT FC (COUNTER MIDDLE)	31.2	
C LIGHT OUTPUT FC (COUNTER BACK)	47.3	
D LIGHT OUTPUT FC (COUNTER WALL)	17.8	
CRI (COLOR RENDERING)	100	
CCT (COLOR TEMPERATURE)	2700K	
LIGHT SOURCE LIFE (HRS)	10,000	

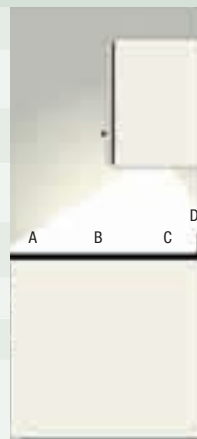

TaskWork Direct Wire 12 Volt Xenon offers you a simple installation solution for illuminating a task area or adding ambient lighting.

AVAILABLE FINISHES

Bronze (BZ), Brushed Stainless Steel (SS) and White (WH)



TaskWork Direct Wire

120 Volt Xenon



12013 BZ
Fixture
shown in Bronze

STEP



SELECT APPROPRIATE LIGHT FIXTURE SIZE & FINISH.

12011 BZ, SI, WH

- 1 light, 7" L x 5" W x 1-1/4" H
- 120 Volt, 20 Watt Xenon bulb included

12012 BZ, SI, WH

- 2 light, 12" L x 5" W x 1-1/4" H
- 120 Volt, 20 Watt Xenon bulbs included

12013 BZ, SI, WH

- 3 light, 22" L x 5" W x 1-1/4" H
- 120 Volt, 20 Watt Xenon bulbs included

12014 BZ, SI, WH

- 4 light, 30" L x 5" W x 1-1/4" H
- 120 Volt, 20 Watt Xenon bulbs included

Replacement Bulbs

12090 CLR – Replacement Bulb

- 120 Volt, 20 Watt Xenon, clear

TaskWork Direct Wire 120 Volt Xenon design features large wiring compartments and multiple 1/2" trade-size knockouts for fast and easy installation.

AVAILABLE FINISHES

Painted Bronze (BZ), Silver (SI) and White (WH)

BZ



SI



WH



BACK MOUNT DESIGN



FEATURES

- 1-1/4" Profile x 5" W
- 120 Volt, 20 Watt Xenon bulb(s)
- Painted Bronze, Silver or White finish
- High/Low/On-Off Switch
- cUL Listed


PERFORMANCE DATA (12012)

LUMENS/WATT	5	
A LIGHT OUTPUT FC (COUNTER FRONT)	8.6	
B LIGHT OUTPUT FC (COUNTER MIDDLE)	21.1	
C LIGHT OUTPUT FC (COUNTER BACK)	38.2	
D LIGHT OUTPUT FC (COUNTER WALL)	13.2	
CRI (COLOR RENDERING)	100	
CCT (COLOR TEMPERATURE)	2620K	
LIGHT SOURCE LIFE (HRS)	2,500	



TaskWork Modular

120 Volt Fluorescent

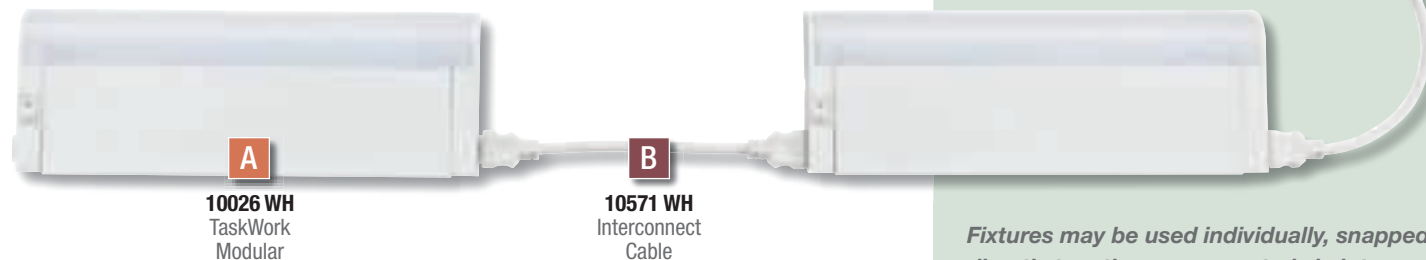

Flexibility and cost-effectiveness in one: TaskWork Modular fluorescent is ideal for laundry or secondary rooms.

Fixtures may be used individually, snapped directly together or connected via interconnect cables to customize the lighting installation.

STEP 1

SELECT APPROPRIATE LIGHT FIXTURE SIZE.

A 10026 WH 12-1/2"

- 8 Watts Max T5 Fluorescent lamp included
- 12-1/4" L x 4-3/4" W x 1" H

10027 WH 21-1/2"

- 13 Watts Max T5 Fluorescent lamp included
- 21-1/2" L x 4-3/4" W x 1" H

10028 WH 33-1/2"

- 21 Watts Max T5 Fluorescent lamp included
- 33-1/2" L x 4-3/4" W x 1" H

STEP 2

INTERCONNECT CABLES CONNECT MULTIPLE FIXTURES

- B 10571 WH - Interconnect 9 inches**
- 10572 WH - Interconnect 14 inches**
- 10573 WH - Interconnect 21 inches**

- For longer interconnect cable lengths, multiple cables may be connected together

STEP 3

POWER AND ACCESSORIES

C 10570* WH - Wire Module

- 7-3/4" L x 2-5/8" W x 1" H
- Provides for safe, push-in wiring without the use of wire connectors
- Interconnect cables easily join wire module and fixtures
- Integrated supply wire strain relief for one or two wires
- Snap-on cover
- Use for hard-wire installation
- Use with sheathed cable (12/2 or 14/2 with ground)

10569 WH Master Switch (optional)

- 3-1/2" L x 5" W x 1" H
- Can be installed between the wiring module and the first fixture to control the entire system. Or, it can be positioned between fixtures to control those fixtures located after it in line.

10575** WH


Plug-in Master Switch (optional)

- 3-1/2" L x 5" W x 1" H
- Allows control of cabinet lighting without accessing house wiring

* For use only with Kichler interconnect cables as part of TaskWork Modular systems

** For use only with Kichler interconnect cables as part of TaskWork Modular systems. Note, too, that switch assembly will plug directly into the side of any TaskWork Modular fixture. This eliminates the need to use an interconnect cable. Check mounting location for adequate space.

FRONT MOUNT DESIGN

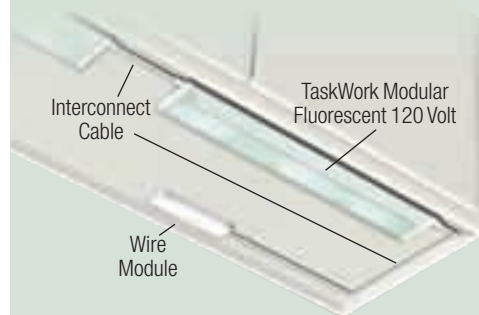


FEATURES

- 1" profile x 5" Width
- Fluorescent lamp included
- Unique front mount design as recommended by the American Lighting Association
- Ability to snap fixtures together to create an even flow of light
- Keyhole mounting
- Extruded Aluminum construction
- On-off Switch
- cUL Listed

PERFORMANCE DATA (10026)

LUMENS/WATT	52
A LIGHT OUTPUT FC (COUNTER FRONT)	9.8
B LIGHT OUTPUT FC (COUNTER MIDDLE)	24.5
C LIGHT OUTPUT FC (COUNTER BACK)	37.5
D LIGHT OUTPUT FC (COUNTER WALL)	20.2
CRI (COLOR RENDERING)	80
CCT (COLOR TEMPERATURE)	4100K
LIGHT SOURCE LIFE (HRS)	7500

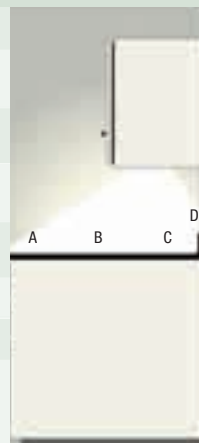

TaskWork Direct Wire

120 Volt Fluorescent



10042 WH

STEP 1

SELECT APPROPRIATE LIGHT FIXTURE SIZE. DETERMINE DIRECT WIRE OR CORD & PLUG POWER SUPPLY.

TaskWork Direct Wire

Fluorescent is a traditional choice for electricians who require a low cost solution to finish a job.

10041 WH

12"

- 8 Watts Max T5 Fluorescent lamp included
- 12-1/4" L x 3-1/2" W x 1" H

10042 WH

21-1/2"

- 13 Watts Max T5 Fluorescent lamp included
- 21-1/2" L x 3-1/2" W x 1" H

10043 WH

34-1/2"

- 21 Watts Max T5 Fluorescent lamp included
- 34-1/2" L x 3-1/2" W x 1" H

10044 WH

46-1/2"

- 28 Watts Max T5 Fluorescent lamp included
- 36-1/2" L x 3-1/2" W x 1" H

Accessories

10582 WH - 38" Power Cord and Plug Accessory (not shown)

10588 SI - Duplex BX Cable Connector

- Connects two cables to any convenient wireway knockout located on the fixture. This allows for a group of fixtures to be wired in series, using a single knockout. Connector is listed for use with 14-2 steel armored cable, 3/8 trade size reduced wall flexible steel, aluminum conduit or steel flexible metal conduit (not shown)

10589 SI - Connector for NM & BX cable

- UL listed for both non-metal (NM) or BX cables
- Connects a single cable to any convenient wireway knockout located on the fixture

BACK MOUNT DESIGN




FEATURES

- 2700K Correlated Color Temperature
- 1" Profile x 3-1/2" W
- Snap-in etched and ribbed diffuser
- Hinged assembly
- Keyhole mounting
- Multiple KO's for installation ease
- Side KO's for optional end-to-end assembly
- UL listed NM & BX single cable connector included
- On-off Switch
- Built-in transformer
- cUL Listed

PERFORMANCE DATA (10041)

	LUMENS/WATT	47.5
A	LIGHT OUTPUT FC (COUNTER FRONT)	11.4
B	LIGHT OUTPUT FC (COUNTER MIDDLE)	22.7
C	LIGHT OUTPUT FC (COUNTER BACK)	33.5
D	LIGHT OUTPUT FC (COUNTER WALL)	11.8
	CRI (COLOR RENDERING)	85
	CCT (COLOR TEMPERATURE)	2700K
	LIGHT SOURCE LIFE (HRS)	7,500

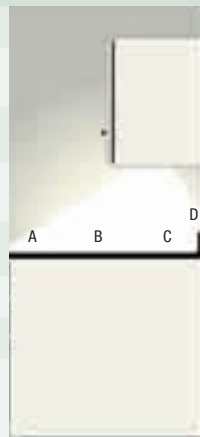

TaskWork Bright Disc

12 Volt Xenon



Accentuate the everyday

From under kitchen cabinets to inside bookshelves, TaskWork Bright Discs put a touch of 20 Watt light where you need it. They offer high quality, all-metal casings in six popular finishes, and versatile, Class 2 transformer choices simplify professional installation in virtually any new construction or remodeling application.



12501 BZ
1" H x 3" D
Shown in Bronze
(actual size)

Installation photo employs (3) 30" TaskWork 12V Direct Wire units under each cabinet section and above each cabinet section. (3) TaskWork Bright Discs are used per each island shelf.



STEP

1

SELECT NUMBER OF BRIGHT DISCS & FINISH


- 12501 BK – Black
- 12501 BZ – Bronze
- A** 12501 CO – Copper
- 12501 NI – Nickel
- 12501 PB – Polished Brass
- 12501 WH – White
- 1 light, 1" H x 3" D
- Supplied with 72" of lead wire
- 12 Volt, 20 Watt Xenon bulb included

Replacement Bulb

- 12590 CLR - Replacement Bulb**
- 12 Volt, 20 Watt replacement bulb

AVAILABLE FINISHES

Black (BK), Bronze (BZ), Copper (CO), Nickel (NI), Polished Brass (PB) and White (WH)

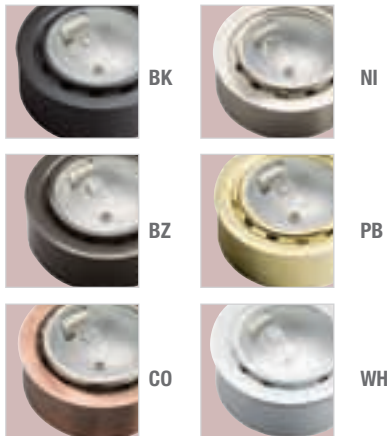

STEP

2

SELECT POWER SUPPLY

- B** 12531 BK 60 Watt – 12 Volt Enclosed Electronic Transformer
- 6-1/2" H x 1-1/2" W x 1-1/2" D
- Class 2

- 12533 BK 3x60* (180) Watt 12 Volt Enclosed Electronic Transformer
- 5-1/4" H x 4-3/4" W x 1-3/4" D
- Class 2

- 12534 BK 6x60* (360) Watt 12 Volt Enclosed Electronic Transformer
- 8-1/2" H x 5-1/4" W x 1-3/4" D
- Class 2

- Plug-In Transformer**
- 12532 BK, WH 60* Watt 12 Volt Electronic Transformer
- Class 2

* 20 Watt Minimum load required for each 60 Watt transformer



UNIVERSAL MOUNT DESIGN



FEATURES

- 1" Profile x 3" D
- 12 Volt, 20 Watt Xenon bulb
- Suitable for recessed or flush mount installations. Not suited for ceiling or wall installation.
- Durable Nickel, Copper, Polished Brass, Powder-Coated White, Bronze or Black finishes available
- cUL Listed Class 2

PERFORMANCE DATA

LUMENS/WATT	4.9	
A LIGHT OUTPUT FC (COUNTER FRONT)	14.5	
B LIGHT OUTPUT FC (COUNTER MIDDLE)	57.7	
C LIGHT OUTPUT FC (COUNTER BACK)	73	
D LIGHT OUTPUT FC (COUNTER WALL)	40.5	
CRI (COLOR RENDERING)	100	
CCT (COLOR TEMPERATURE)	3000K	
LIGHT SOURCE LIFE (HRS)	5,000	



TaskWork Linear

12 Volt & 24 Volt Xenon

Bring light
to any and
every space



10215 BK
1-15/16" L x 11/16" W x 3/4" H
Shown in Black (actual size)



10215 WH
1-15/16" L x 11/16" W x 3/4" H
Shown in White (actual size)




Put away the special tools. With Kichler TaskWork Linear Lighting, you'll have versatile, low voltage xenon lighting that installs in a snap. The low-profile units help you create a customized design under, above or inside cabinetry to produce instant lighting interest.

Installation photo employs 27'-0" of TaskWork Linear lighting with 5 watt lamps installed every 4" including each shelf.

TaskWork Linear

12 Volt & 24 Volt Xenon

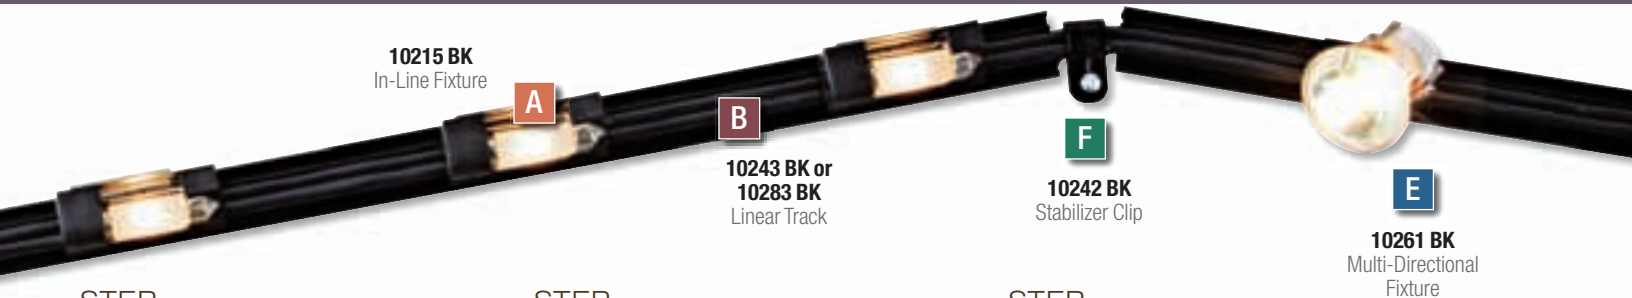

STEP 1
EASY-TO-INSTALL TRACK

- B** 10243 BK, WH (50-pack)
10283 BK, WH (10-pack)
- Snaps on the score, every 6"
 - Captive screws every 6"
 - White or Black finish
 - 4' linear track

Accessories

- 10240 BK, WH – Wire End Caps
10241 BK, WH – Track End Caps
10298 WH – Double-Sided Tape (1/2" x 15')
10299 – Box Of Screws (100 pieces)

10240 BK, WH
Wire End Caps



10241 BK, WH
Track End Caps



10244 BK, WH
Splicing Block Connector
(listed enclosure required)

STEP 2
LOW-VOLTAGE CABLE

- C** 10230 BK, WH – Linear Cable 25 Feet
10232 BK, WH – Linear Cable 100 Feet
10233 BK, WH – Linear Cable 500 Feet
10234 BK, WH – Linear Cable 1000 Feet

- F** Stabilizer Clip
10242 BK, WH

- Designed to attach Kichler Linear SPT cable to any wood surface
- Prevents cable from sagging
- Allows for making turns in cable in areas where cable is not supported by track

Splicing Block Connector

- 10244 BK, WH (listed enclosure required)
10254 BK, WH - Splicing Block With Enclosure

- Four connections allow up to four rounds of NM or Kichler's SPT cable in any combination
- Possible combinations
 1. NM cable in and up to three SPT cables out
 2. SPT cable in and up to three SPT cables out
 3. NM cable in and up to three NM cables out. All wiring should be in accordance with local and national codes



10254 BK, WH
Splicing Block with Enclosure

STEP 3
SELECT NUMBER OF IN-LINE OR DIRECTIONAL FIXTURES AND FINISH. FOR IN-LINE, SELECT VOLTAGE & WATTAGE. FOR DIRECTIONAL, SELECT 12° SPOT OR 26° FLOOD & VOLTAGE.

- A** In-Line Fixture
- 10215 BK, WH – 12 Volt/5 Watt
 - 10216 BK, WH – 12 Volt/10 Watt
 - 10217 BK, WH – 24 Volt/5 Watt
 - 10218 BK, WH – 24 Volt/10 Watt
 - Shipped with frosted bulb pre-installed
 - Easy to handle, no sharp edges, no bent reflectors
 - Less than width of track

In-Line Replacement Lamps

- 10245 – 12 Volt/5 Watt
- 10246 – 24 Volt/5 Watt
- 10247 – 12 Volt/10 Watt
- 10248 – 24 Volt/10 Watt

- Bright Xenon bulb
- Frosted for no glare
- 5 or 10 Watt options

- E** Multi-Directional Fixture
10261 BK, WH

- Order bulbs separately
- G4, MRC-11
- Added versatility for your Linear Lighting
- Highlight architectural features
- Overall dimensions (with bulb) 2-1/4" H x 1-1/2" W x 1-1/2" H
- Maintain clearance of 3" from other surfaces. Space no closer than 3" from other lampholders

Multi-Directional Lamps

- 10256 CLR – 12 Volt, 12° spot (20 Watt)
- 10257 CLR – 12 Volt, 26° flood (20 Watt)
- 10258 CLR – 24 Volt, 12° spot (20 Watt)
- 10259 CLR – 24 Volt, 26° flood (20 Watt)
- Rated life 2,000 hours



10215 BK
In-Line Fixture



10215 WH
In-Line Fixture

10261 BK, WH
Multi-Directional Fixture
with
10256 CLR
Multi-Directional Lamp



AVAILABLE FINISHES
Black (BK) and White (WH)





10230 BK
Linear Cable



10210 BK
Electronic
Transformer

STEP 4

SELECT POWER SUPPLY MORE THAN ONE POWER SUPPLY MAY BE NEEDED

- Resettable short-circuit protection
- Built-in overload protection
- All transformers are UL 2108 listed
- Magnetic Premium Transformers have screw terminals for faster wiring, no wire nuts. Slim profile allows for easily concealed mounting.

Electronic/Plug-In Transformers

10214 BK, WH – 12 Volt/75 Watt

Electronic Plug-in Transformer

- 10' of linear cable attached
- 3" D x 9" H x 5" L

D Electronic Transformers

10210 BK – 12 Volt/150 Watt

Electronic Hardwire Transformer

- 35-Watt minimum load required
- 1-1/2" D x 4" H x 4" L (not shown)



10210 BK
Hardwire Electronic
Transformers



10214 BK, WH
Plug-In Electronic
Transformers

Remote Magnetic Transformers

10205 BK – 12 Volt/150 Watt Magnetic

- 3-1/2" D x 6" H x 3" L

10204 BK – 12 Volt/300 Watt Magnetic

- 4-1/8" D x 6" H x 3-1/2" L

10206 BK – 12 Volt/2 x 300 Watt Magnetic

- 5" D x 9-1/2" H x 4-1/2" L

10208 BK – 24 Volt/300 Watt Magnetic

- 4-1/8" D x 6" H x 3-1/2" L

10209 BK – 24 Volt/600 Watt Magnetic

- 4-7/8" D x 9-1/2" H x 4-1/2" L

10219 BK – 24 Volt/2 x 600 Watt Magnetic

- 6" D x 10-1/2" H x 5-1/2" L

Remote Magnetic Premium Transformers- Exclusively by Kichler®

10207 WH – 12 Volt/150 Watt magnetic

- 6-3/4" D x 2-5/16" H x 10" L

10213 WH – 12 Volt/300 Watt magnetic

- 6-3/4" D x 2-5/16" H x 10" L

10211 WH – 12 Volt/2 x 300 Watt magnetic

- 6-3/4" D x 2-5/16" H x 10" L



10219 BK (shown)
10208 BK
10209 BK
Magnetic Transformers




10206 BK (shown)
10204 BK
10205 BK
Magnetic
Transformers



10207 WH (shown)
10213 WH
10211 WH
Magnetic Premium
Transformers

FRONT MOUNT DESIGN

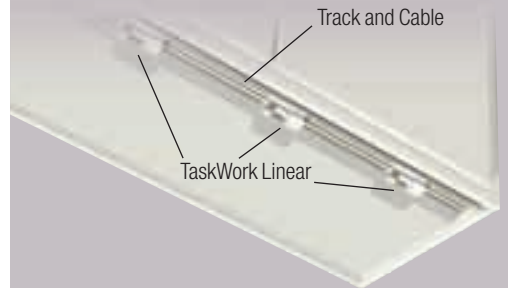


FEATURES

- Low profile
- Flexible installation
- Black and White finish
- 12 Volt and 24 Volt options
- 5 Watt and 10 Watt options
- cUL Listed

PERFORMANCE DATA (10216 10 WATT ON 4" CENTER)

	LUMENS/WATT	4.8
A	LIGHT OUTPUT FC (COUNTER FRONT)	14
B	LIGHT OUTPUT FC (COUNTER MIDDLE)	27
C	LIGHT OUTPUT FC (COUNTER BACK)	32
D	LIGHT OUTPUT FC (COUNTER WALL)	28
	CRI (COLOR RENDERING)	100
	CCT (COLOR TEMPERATURE)	2800K
	LIGHT SOURCE LIFE (HRS)	3,000

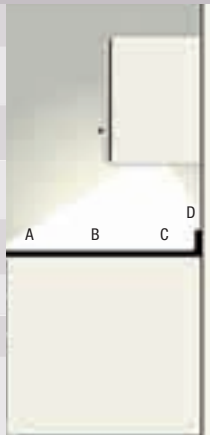

Selection Guide

DESIGN PRO LED LINEAR



KEY FEATURES

- Low profile
- Equidistant spaced light
- Can be linked with LED Strip and Disc system
- Black and White finish
- Class 2 Listed

INSTALLATION

- Flexible installation with or without track
- Position as needed in covers, tray ceilings, cabinets, toe kicks and over cabinets
- Class 2 rated
- Plug-in power supply available



DESIGN PRO LED DISC



KEY FEATURES

- Ultra-Thin 3/8" Profile x 2-3/4" D
- Color Rendering Index > 90 CRI
- High brightness LED
- Higher efficiency
- 3,000K correlated color temperature average is similar to Halogen & Xenon
- Long life light source (40,000 HRS)
- Captive screws for ease of installation
- Class 2 Listed

INSTALLATION

- Interconnect
- Fixtures Interconnect
- Plug-in power supply available
- Center mount
- Easy to mount with captive screws
- Class 2 rated
- Remote power supply*



Kichler Design Pro LED Undercabinet and Disc System meets ENERGY STAR Requirements when used with our Remote Power Supplies 12380BK and 12382BK, a minimum of any 3 fixtures, and a minimum of 20 watts.

DESIGN PRO LED MODULAR



KEY FEATURES

- Ultra-Thin 1/2" Profile
- Color Rendering Index > 90 CRI
- High brightness LED
- Higher efficiency
- 3,000 K correlated color temperature average is similar to Xenon
- Long life light source (40,000 HRS)
- Ability to snap fixtures together or interconnect to create an even flow of light
- Captive screws for ease of installation
- Class 2 Listed

INSTALLATION

- Interconnect
- Fixtures interconnect
- Plug-in power supply available
- Front mount
- Easy to mount with captive screws
- Class 2 rated
- Remote power supply*



Kichler Design Pro LED Undercabinet and Disc System meets ENERGY STAR Requirements when used with our Remote Power Supplies 12380BK and 12382BK, a minimum of any 3 fixtures, and a minimum of 20 watts.

DESIGN PRO LED DIRECT WIRE




KEY FEATURES

- Color Rendering Index – mid 80's
- High brightness LED
- High efficiency
- 3000K correlated color temperature average ±150K is similar to Xenon
- Long life light source (40,000 Hours)
- 1" Profile x 4-1/2" W
- Hinged assembly
- Keyhole mounting
- Multiple KO's for installation ease
- Side KO's for optional end-to-end assembly
- UL listed NM & BX single cable connector included
- On-off Switch
- Built-in transformer/driver

INSTALLATION

- Direct wire
- All-in-one unit



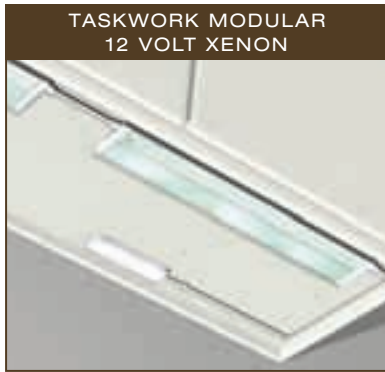

KEY FEATURES

- 1" Profile x 5" W
- 12 Volt, 18 Watt Xenon Bulb(s)
- Unique front-mount design as recommended by the American Lighting Association
- Ability to snap fixtures together to create an even flow of light
- Captive screws for ease of installation
- Durable, Anodized Brushed Bronze, Nickel or Powder-Coated White finish
- Extruded aluminum construction
- Hinged tempered glass diffuser
- High/Low/On-Off Switch
- Built-in electronic transformer

INSTALLATION

- Xenon – interconnect
- Fixtures interconnect
- Front mount



KEY FEATURES

- 1" Profile x 5" W
- 120 Volt, 20 Watt Xenon Bulb(s)
- Direct wire or inter-connectability
- Unique front-mount design as recommended by the American Lighting Association or optional rear mount
- Ability to snap fixtures together to create an even flow of light
- Durable Anodized Bronze, Brushed Stainless Steel or Powder-Coated White finish
- High/Low/On-Off Switch

INSTALLATION

- Front mount
- Optional direct wire
- Fixtures interconnect



KEY FEATURES

- 1" Profile x 5" W
- 12 Volt, 18 Watt Xenon Bulb(s)
- Durable, Brushed Stainless Steel or Powder-Coated White or Bronze finishes
- Fastener-free hinge assembly
- Keyhole mounting
- Easy-lock poly-tempered glass diffuser.
- Single BX Connector Included
- High/Low/On-Off Switch
- Built-in electronic transformer

INSTALLATION

- Direct wire
- Built-in transformer*



KEY FEATURES

- 1-1/4" Profile x 5" W
- 120 Volt, 20 Watt Xenon Bulb(s)
- Painted Bronze, Silver or White finish
- High/Low/On-Off Switch

INSTALLATION

- Direct wire



*Installation Tip: To avoid frequency interference, locate and install Transformer/Power Supplies at least 3 ft. from television, computer, radio or other electronic receivers.

Selection Guide

TASKWORK MODULAR
120 VOLT FLUORESCENT



KEY FEATURES

- 1" Profile x 5" W
- T5 fluorescent lamps included
- Unique front-mount design as recommended by the American Lighting Association
- Ability to snap fixtures together to create an even flow of light
- Captive screws for ease of installation
- Durable Powder-Coated White finish
- Extruded aluminum construction
- White polycarbonate diffuser
- On-Off Switch
- Electronic ballast

INSTALLATION

- Fluorescent – direct wire & interconnect
- Fixtures interconnect
- Front mount



TASKWORK DIRECT WIRE
120 VOLT FLUORESCENT



KEY FEATURES

- 2700K Correlated Color Temperature
- 1" Profile x 3-1/2" W
- Snap-in etched and ribbed diffuser
- Hinged assembly
- Keyhole mounting
- Multiple KO's for installation ease
- Side KO's for optional end-to-end assembly
- UL listed NM & BX single cable connector included
- On-off Switch
- Built-in transformer

INSTALLATION

- Direct wire
- All-in-one unit



TASKWORK BRIGHT DISC
12 VOLT XENON



KEY FEATURES

- 1" Profile x 3" D
- 12 Volt, 20 Watt Xenon Bulb
- Suitable for recessed or flush mount installations. Not suited for ceiling or wall installation.
- Durable Nickel, Copper, Polished-Brass, Powder-Coated White, Bronze or Black finishes available
- UL Listed Class 2

INSTALLATION

- Flexible mounting
- Class 2 rated
- Remote transformer*



TASKWORK LINEAR
12 VOLT & 24 VOLT XENON



KEY FEATURES

- Flexible installation
- Black and White finish
- 12 Volt and 24 Volt options
- 5 and 10 Watt options

INSTALLATION

- Flexible mounting
- Easy to mount with captive screws in track
- Remote transformer*



*Installation Tip: To avoid frequency interference, locate and install Transformer/Power Supplies at least 3 ft. from television, computer, radio or other electronic receivers.

Index

Item ID	Page
10026 WH	28
10027 WH	28
10028 WH	28
10041 WH	29
10042 WH	29
10043 WH	29
10044 WH	29
10204 BK	35
10205 BK	35
10206 BK	35
10207 WH	35
10208 BK	35
10209 BK	35
10210 BK	35
10211 WH	35
10213 WH	35
10214 BK	35
10214 WH	35
10215 BK	34
10215 WH	34
10216 BK	34
10216 WH	34
10217 BK	34
10217 WH	34
10218 BK	34
10218 WH	34
10219 BK	35
10230 BK	34
10230 WH	34
10232 BK	34
10232 WH	34
10233 BK	34
10233 WH	34
10234 BK	34
10234 WH	34
10240 BK	34
10240 WH	34
10241 BK	34
10241 WH	34
10242 BK	34
10242 WH	34
10243 BK	34
10243 WH	34
10244 BK	34
10244 WH	34
10245	34
10246	34
10247	34
10248	34
10254 BK	34
10254 WH	34
10256 CLR	34
10257 CLR	34
10258 CLR	34
10259 CLR	34

Item ID	Page
10261 BK	34
10261 WH	34
10283 BK	34
10283 WH	34
10298 WH	34
10299	8, 34
10299 BK	8
10560 WH	23
10561 WH	23
10562 WH	23
10563 BRZ	22
10563 NI	22
10563 WH	22
10564 BRZ	22
10564 NI	22
10564 WH	22
10565 BRZ	22
10565 NI	22
10565 WH	22
10566 BRZ	22
10566 NI	22
10566 WH	22
10567 BRZ	22
10567 NI	22
10567 WH	22
10568 BRZ	22
10568 NI	22
10568 WH	22
10569 BRZ	22
10569 NI	22
10569 WH	22, 28
10570 BK	22, 25
10570 WH	22, 25, 28
10571 BK	23, 24
10571 WH	23, 24, 28
10572 BK	23, 24
10572 WH	23, 24, 28
10573 BK	23, 24
10573 WH	23, 24, 28
10574 CLR	23, 26
10575 BRZ	22
10575 NI	22
10575 WH	22, 28
10579 BZ	26
10579 SS	26
10579 WH	26
10580 BZ	26
10580 SS	26
10580 WH	26
10581 BZ	26
10581 SS	26
10581 WH	26
10582 WH	19, 26, 29
10584 BZ	26
10584 SS	26

Item ID	Page
10584 WH	26
10585 BRZ	22
10585 NI	22
10585 WH	22
10586 WH	23
10587 BRZ	22
10587 NI	22
10587 WH	22
10588 SI	19, 26, 29
10589 SI	19, 26, 29
10595 BZ	26
10595 SS	26
10595 WH	26
12011 BZ	27
12011 SI	27
12011 WH	27
12012 BZ	27
12012 SI	27
12012 WH	27
12013 BZ	27
12013 SI	27
12013 WH	27
12014 BZ	27
12014 SI	27
12014 WH	27
12051 BZ	19
12051 SS	19
12051 WH	19
12052 BZ	19
12052 SS	19
12052 WH	19
12053 BZ	19
12053 SS	19
12053 WH	19
12054 BZ	19
12054 SS	19
12054 WH	19
12090 CLR	27
12211 BZ	24
12211 SS	24
12211 WH	24
12212 BZ	24
12212 SS	24
12212 WH	24
12213 BZ	24
12213 SS	24
12213 WH	24
12214 BZ	24
12214 SS	24
12214 WH	24
12215 BZ	24
12215 SS	24
12215 WH	24
12301 BRZ	16
12301 NI	16

Item ID	Page
12301 WH	16
12303 BRZ	16
12303 NI	16
12303 WH	16
12305 BRZ	16
12305 NI	16
12305 WH	16
12310 BK	12
12310 BRZ	12
12310 NI	12
12310 WH	12
12320 BK	8
12320 WH	8
12323 BK	8
12323 WH	8
12330 BK	8
12330 WH	8
12332 BK	8
12333 BK	8
12335 BK	8
12335 WH	8
12338 BK	8
12338 WH	8
12339 BK	8
12339 WH	8
12341 BK	12, 16
12341 WH	12, 16
12342 BK	12, 16
12342 WH	12, 16
12343 BK	12, 16
12343 WH	12, 16
12344 BK	9, 13, 17
12344 WH	9, 13, 17
12345 BK	12, 16
12345 WH	12, 16

Item ID	Page
12346 BK	9, 13, 17
12346 WH	9, 13, 17
12347 BK	12
12347 WH	12
12348 BK	12, 16
12348 WH	12, 16
12349 BK	12, 16
12349 WH	12, 16
12350 BK	12, 16
12350 WH	12, 16
12351 BK	12, 16
12351 WH	12, 16
12353 BK	9, 13, 17
12353 WH	9, 13, 17
12354 BK	12
12354 WH	12
12380 BK	9, 13, 17
12382 BK	9, 13, 17
12383 BK	9, 13, 17
12383 WH	9, 13, 17
12384 BK	9, 13, 17
12384 WH	9, 13, 17
12501 BK	31
12501 BZ	31
12501 CO	31
12501 NI	31
12501 PB	31
12501 WH	31
12531 BK	31
12532 BK	31
12532 WH	31
12533 BK	31
12534 BK	31
12590 CLR	31

Awards & Notable Distinctions

- 2009 Hanley Wood Building Products MVP Award Winner
- 2009 Hanley Wood Green Products Award
- 2009 Professional Builder/Professional Remodeler Top 100 New Products Awards
- ENERGY STAR: America's First ENERGY STAR rated residential solid state LED under-cabinet lighting product
- 2009 ADEX Platinum Award Winner
- 2008 Lighting for Tomorrow Award
- 2008 Green Builder Magazine – Sustainable "HOT 50" Winner
- 2008 Eco Home Magazine – Editor's Choice Award
- 2008 Kitchen & Bath Business Product Innovator Award – Honorable Mention
- 2008-2009 Syndicated Home Improvement Shows
- The Daily Buzz – Environmentally Conscious Innovation for the Home



Design Pro LED System Applications



A Design Pro LED Modular
See pages 14-17

B Design Pro LED Discs
See pages 10-13

C Design Pro LED Linear
See pages 6-9

KICHLER® LIGHTING
World Headquarters
7711 E. Pleasant Valley Rd.
PO Box 318010
Cleveland, Ohio 44131-8010

100M/09-LS-903
Catalog No. **K510**
Printed in USA
© Copyright All rights reserved.
Kichler Lighting.

www.kichler.com
Distribution Centers:
Atlanta, Georgia
Cleveland, Ohio
Las Vegas, Nevada

The majority of newer Kichler Lighting fixtures are U.S.
Patent Pending. Many are also Patent Pending in Canada.

