



UPC Code: 07847739929

Country Of Origin: China

GFA15-37E

Brand Features

Portable GFCI Devices from Leviton are now sleeker and more rugged than ever! And, while these devices are fully OSHA compliant for use on job sites, they are also perfect for use in a variety of temporary power applications, such as recreation vehicles, marine vehicles, portable pools, portable generators, submersible pumps, vending machines and more.

Item Description

15 Amp, 120 Volt, 37 ft. Cord Set, Molded-On NEMA Plug (5-15P) and No Connector, Straight Blade, Automatic Reset GFCI Device, 14-3 SJTW Cord

Technical Information

AC Horsepower Ratings

At Rated Voltage: 3/4 Horsepower

Electrical Specifications

Amperage: 15 A

Voltage: 120 VAC

Pole: 2

Wire: 3

Current Interrupting: 2 kA

Trip Level: 5mA plus or minus 1mA

Environmental Specifications

Flammability: Rated V-2 per UL94

Operating Temperature: -35°C to 66°C

Material Specifications

Cord Type: 14/3 SJTW

Body Material: Polycarbonate

Blades/Contacts: Brass

Mechanical Specifications

Product ID: Ratings marked on device label

Standards and Certifications

NEMA: WD-6

ANSI: C-73

UL 943: Class A (GFCI)


UL 498: File E-48380

CSA Standard: C22.2 No 144

NOM: 057

Features and Benefits

- Rainproof, Outdoor rated GFCI Module.
- Fully complies with NEC and OSHA regulations for construction sites.
- Automatically resets to ON when plugged in or after power interruption.
- Power Indicator lamp goes OFF if GFCI trips, power is interrupted or line cord is unplugged.
- Open-Neutral Protection immediately trips the GFCI if the neutral conductor on the line side is opened, eliminating the possibility of the GFCI Cord Set having a live hot leg.
- Inline GFCI unit features a rainproof, ultrasonically welded enclosure to ensure long service life.
- UL Recognized Component.
- CSA Certified.

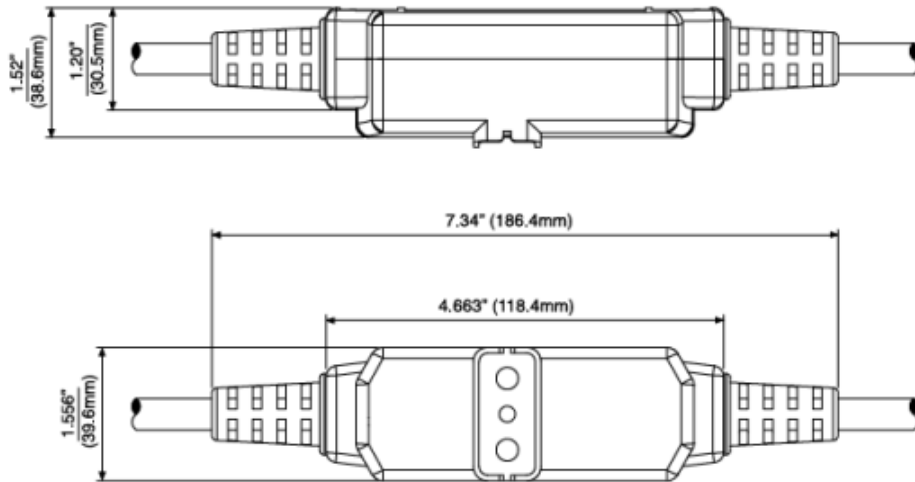

SPECIFICATION SUBMITTAL

JOB NAME:		CATALOG NUMBERS:	
<input type="text"/>		<input type="text"/>	<input type="text"/>
JOB NUMBER:		<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Teléfono: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

