
LIGHTOLIER®

Page 1 of 2

Pendant Adapter

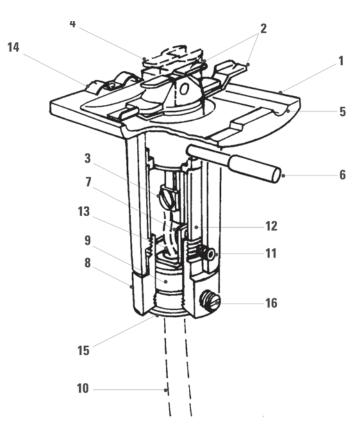

Catalog No.	Finish	Mounting	Dimensions
7599	Matte White	All Lytespan Track Systems	Height 3″
7599BK	Blacl		Dia. 1 1/16"

Features

- 1. Attachment Fitting: Die-cast zinc alloy. Matte white or black finish.
- 2. Stem Locking Clamps/Electrical Contacts: Move in conjunction with lever.
- 3. Screw Terminal: Connects onto individual conductors.
- **4. Movable Brass Contact:** Extends for connection to 2nd circuit in Advent Lytespan Track.
- 5. Polarity Keyway
- 6. Lever: Energizes unit
- 7. Ground Screw/Ground Clip
- 8. Strain Relief Cap: Machined brass. 1/4-18 I.P. internal thread for connecting stem or chain loop. .
- 9. Cord Protective Nylon Bushing: Prevents damage to fixture cord.
- 10. Fixture Cord, Stem or Chain: Note: Cord max dia. .340" (not sup-plied).
 Stem size: 1/2" O.D., .065" wall, 1/4-18 I.P. thread (not sup-plied).
 Chain: 1/4-18 I.P. thread (not supplied).
- **11.#8-32 Hex Head Set Screw:** Allen wrench provided.
- 12. Insulator Housing: .032" plastic.
- 13. Conductor: #18 ga. max.
- 14. Ground Spring
- 15. Nylon Bushing: Used with pendant cord.
- 16.1/4" 20 Set Screw: Secures fixture cord, stem or chain loop.

Electrical

Can be used with 3 conductor fixture cords up to a maximum diameter of 0.340", suitable for 2 conductor and 3 conductor stem or chain mounted fixtures.

Finish

All painted finishes baked enamel.

Labels

UL; I.B.E.W.

Job InformationType:Job Name:Cat. No.:Lamp(s):Notes:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. www.lightolier.com © 2009 Philips Group • B0109

Lightolier is a Philips group brand

