



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

4" IC 900 LUMEN WARMDIM® LED DOWNLIGHT NEW CONSTRUCTION

IC1LED (WD G4 09LM) RECESSED HOUSING

**OPEN TRIMS**

PRODUCT DESCRIPTION

Dedicated LED, Air-Loc® sealed new construction housing with patented WarmDim® technology • LED color temperature warms while dimming to emulate the dimming performance of traditional incandescent light sources • Double wall, shallow housing construction allows for fit in 2 x 6 construction • Can be completely covered with insulation • Fully sealed housing stops infiltration and exfiltration of air, reducing heating and air cooling costs without the use of additional gaskets • LED housing is designed to provide 50,000 hours of life and is compatible with many standard Juno trims • 5 year limited warranty on LED components.

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

- No harmful ultraviolet or infrared wavelengths
- No lead or mercury, RoHS compliant
- Comparable light output to 75W incandescent while consuming less than 15W

PRODUCT SPECIFICATIONS

LED Light Engine Proprietary patented (US Patent 8,710,754) micro processor controlled light engine emulates dimming performance of incandescent light source • Replaceable light engine attached to high purity aluminum, thermally conductive inner housing provides superior heat transfer to ensure long life of the LEDs • 3000K color temperature at full lumen output • 90 CRI minimum throughout dimming range.

Optical System Computer-optimized reflector design with high reflectance finish coupled with a high transmission diffusing lens conceals the LEDs and produces uniform aperture luminance • Deep regression of lens produces a low glare, efficient system that can produce over 900 lumens with select trims (see page 2 for details) using less than 16W.

Aesthetic Trim Selections Compatible with wide selection of existing Juno trims • Shadow free, knife edge design blends seamlessly into ceiling.

LED Driver Dedicated 120 volt driver • Power factor > 0.9 • Dimmable with the use of most incandescent, magnetic low voltage and electronic low voltage wall box dimmers • For a list of compatible dimmers, see [JUNOICLED-DIM](#) • Mounted inside housing for easy access from below ceiling.

Life Rated for 50,000 hours at 70% lumen maintenance.

Labels ENERGY STAR® Certified when used with select trims • Certified to the high efficacy requirements of California T24 JA8-2016 with select trims • UL listed for U.S. and Canada through-branch wiring, damp locations • Union made • UL and cUL • CP option is compatible with spray foam insulation with an R-value of 3.2 per inch or less.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

HOUSING FEATURES



Housing Designed for use in IC (insulated ceiling) or non-IC construction • Aluminum housing sealed for Air-Loc® compliance • Housing is vertically adjustable to accommodate up to a 1 1/2" ceiling thickness.

Junction Box Pre-wired junction box provided with (6) 1/2" and (1) 3/4" knockouts, (4) knockouts for 12/2 or 14/2 NM cable and ground wire • UL listed and cUL listed for through-branch wiring, maximum 4 #12 branch circuit conductors • Junction box provided with removable access plates • Knockouts equipped with pryout slots • Quick connect electrical connectors supplied as standard for fast, secure installation.

Mounting Frame 22-gauge die-formed galvanized steel mounting frame • Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation.

Real Nail 3 Bar Hangers Patented (US Patent D552,969) Real Nail® 3 bar hangers: telescoping system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Includes removable nail for repositioning of fixture in wood joist construction • Integral T-bar notch and clip for suspended ceilings.

DIMENSIONS

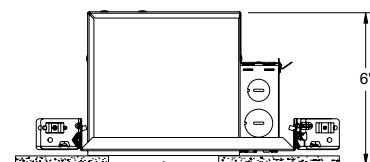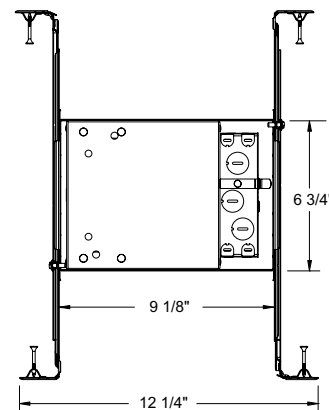


4 1/2" CEILING CUTOUT

ELECTRICAL DATA

Dedicated 120V Only Driver

120V	
Input Power	15.4W (+/-5%)
Input Current	0.13A
Frequency	50/60 Hz
EMI/RFI	FCC Title 47 CFR, Part 15 Class B (residential)
Minimum starting temp	-20°C

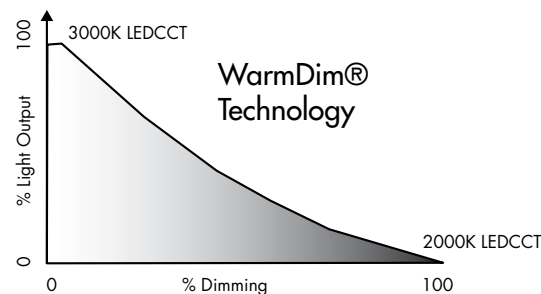

4" IC 900 LUMEN WARMDIM® LED DOWNLIGHT NEW CONSTRUCTION

IC1LED (WD G4 09LM) RECESSED HOUSING
OPEN TRIMS

ORDERING INFORMATION Housing and trim can be ordered together or separate, but will always ship separately.

Example: IC1LED WD G4 09LM 30K 90CRI 120 FRPC

Series	Dynamic Feature	Generation	Lumens	Color Temperature	CRI	Voltage	Driver	Territory
IC1LED 4" LED IC New Construction Downlight	WD Warm Dim	G4 Generation 4	09LM 900 Nominal Lumens	30K 3000K	90CRI 90+ CRI	120 120V	FRPC Forward/Reverse Phase Cut	CP Chicago Plenum

Trim/Description



13 WH

4" Pinhole with Integral Shield - White



14 BABZ

4" Downlight Baffle Trim - Black Baffle, Classic Aged Bronze Trim Ring



14 BBL

4" Downlight Baffle Trim - Black Baffle, Black Trim Ring



14 BSC

4" Downlight Baffle Trim - Black Baffle, Satin Chrome Trim Ring



14 BWH

4" Downlight Baffle Trim - Black Baffle, White Trim Ring



14 WWH

4" Downlight Baffle Trim - White Baffle, White Trim Ring



17 BWH

4" Downlight Cone Trim - Black Cone, White Trim Ring



17 CWH

4" Downlight Cone Trim - Clear Alzak® Cone, White




17 GWH

4" Downlight Cone Trim - Gold Cone, White Trim



17 HZWH

4" Downlight Cone Trim - Haze Cone, White Trim




17 PTSC

4" Downlight Cone Trim - Pewter Cone, Satin Chrome Trim



17 WHZABZ

4" Downlight Cone Trim - Wheat Haze Cone, Classic Aged Bronze Trim



17 WHZWH

4" Downlight Cone Trim - Wheat Haze Cone, White Trim



17 WWH

4" Downlight Cone Trim - White Cone, White Trim Ring



4103 FROSTSC

4" Decorative Beveled Cylinder Trim - Frosted Glass, Satin Chrome Trim Ring



4103 FROSTWH

4" Decorative Beveled Cylinder Trim - Frosted Glass, White Trim Ring



4104 HZSC

4" Decorative Beveled Cone Trim - Haze Cone, Satin Chrome Trim Ring



4104 WHZABZ

4" Decorative Beveled Cone Trim - Wheat Haze, Classic Aged Bronze Trim



4150 MESHSC

4" Decorative Glass Cylinder Trim - Mesh Glass, Satin Chrome Trim Ring

Trim Size: 5" O.D.

Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present, Type IC fixtures must be used.

4" IC 900 LUMEN WARMDIM® LED DOWNLIGHT NEW CONSTRUCTION

IC1LED (WD G4 09LM) RECESSED HOUSING
OPEN TRIMS


PHOTOMETRICS

PHOTOMETRIC REPORT

Test Report #: PT09141901R
Catalog No: IC1LED WD G4 09LM 30K
90CRI 120 with 14 WWH Trim

Luminaire Spacing Criterion: 0.76

Luminaire LPW: 60



CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	1172
5	1141
15	889
25	570
35	290
45	97
55	34
65	14
75	8
85	2
90	0

AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)
Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	64	55	48
5.0'	41	35	31
6.0'	28	24	21
7.0'	23	20	17
8.0'	18	16	14
9.0'	14	12	10
10.0'	10	9	8

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	614	N/A	65.9
0-40°	795	N/A	85.4
0-60°	905	N/A	97.3
0-90°	931	N/A	100.0

INITIAL FOOTCANDLES (One Unit, 15.4W , 49° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	73.3	3.6'
6	32.6	5.5'
8	18.3	7.3'
10	11.7	9.1'

LUMINANCE (Average cd/m²)


Degrees	Average Luminance
45	22338
55	9554
65	5289
75	5314
85	3452

PHOTOMETRIC REPORT

Test Report #: PT09141903R
Catalog No: IC1LED WD G4 09LM 30K
90CRI 120 with 17 HZWH Trim

Luminaire Spacing Criterion: 0.74

Luminaire LPW: 61



CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	1283
5	1242
15	953
25	612
35	289
45	92
55	25
65	4
75	0
85	0
90	0

AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)
Ceiling 80% Wall 50% Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	66	57	50
5.0'	42	36	32
6.0'	29	25	22
7.0'	24	20	18
8.0'	19	16	14
9.0'	14	12	11
10.0'	11	9	8

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	659	N/A	69.7
0-40°	843	N/A	89.1
0-60°	941	N/A	99.5
0-90°	946	N/A	100.0

INITIAL FOOTCANDLES (One Unit, 15.4W , 48.2° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	80.2	3.6'
6	35.6	5.4'
8	20.0	7.2'
10	12.8	8.9'

LUMINANCE (Average cd/m²)

Degrees	Average Luminance
45	21184
55	7119
65	1373
75	0
85	0

Fixtures tested to IES recommended standard for solid state lighting per LM-79-08. Photometric performance on a single unit represents a baseline of performance for the fixture. Results may vary in the field.