



REFERENCE:

EEL2RW-LED
All LED Exit & Emergency Combo



APPLICATIONS

- Emergency Exit

SPECIFICATIONS

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- 9.6V Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Illumination

- Long lasting, efficient ultra-bright white LED lamp heads.
- 1 watt (8 LEDs x 0.125 watt) per head
- High-performance chrome-plated metalized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to center spacing.
- Long-life, energy efficient Red LED exit sign illumination.


Mounting

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount



DIMENSIONS

H	W	D
9.0"	21.0"	4.4"

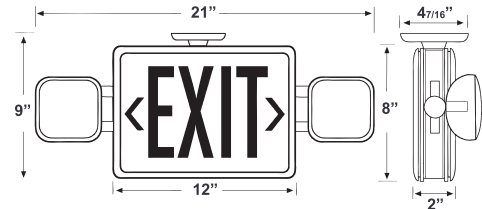

Housing

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators.

Electrical Information

CATALOG NO.	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EEL2RW-LED	3.7	3.8	0.040	0.020

CATALOG NO.	UPC CODE	VOLTAGE	FACE	LETTERING	HOUSING	REMOTE	SHIPPING WEIGHT (LBS)
EEL2RW-LED	06389	120/277	2	red	white	no	5

The compliance of our products to individual project specifications and approval for their use, is not warranted by NSi Lighting Products. Specification sheets and photometric data are provided as a guideline for applications information. Final consideration of any given application must take into consideration knowledge of the specific installation environment.

Questions call NSi Lighting Products at 1-800-321-5847