


# NMPK1-3LED 12V LED Puck Light

Source: 4.2W LEDs

## DIMENSIONS

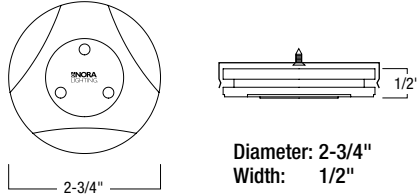

Diameter: 2-3/4"  
Width: 1/2"

## PRODUCT DESCRIPTION

Nora Lighting introduces a new slim light disk LED system for accent, under cabinet, cove lighting and jewelry cases, and other applications with limited space. These low-profile fixtures can be chained together to provide excellent and even illumination on all surfaces. Light disk is one of the most energy efficient products in the market. Combined with ultra low-profile housing, Nora's light disk offers unique features and a great ease of installation. LED technology eliminates forward heat from the fixture, also no UV or infrared rays to harm artwork, retail displays or heat sensitive foods.

## FEATURES

- Available in single units or a kit, which includes 3 puck lights
- Ten lights can be daisy-chained up to 90' away from driver
- Well suited for very small spaces: 1/2" deep with 2-3/4" diameter
- Easy installation using one screw
- Dimmable with Magnetic Power Supply
- 3", 6", 12" and 24" interconnection cables included with each puck
- Exceeds Title 24 high efficacy requirements
- No flicker delay or warm up like compact fluorescent products
- No UV light or infrared wavelengths
- Three Year Limited Warranty

## Included with every puck light:

(1) 12V LED Puck Light, (1) 3" Interconnection Cable [NAPK-703], (1) 6" Interconnection Cable [NAPK-706], (1) 12" Interconnection Cable [NAPK-712], (1) 24" Interconnection Cable [NAPK-724], (1) Mini Coupler [NAPK-713], (1) Mounting Clip, and (1) Screw.

## CONSTRUCTION

Die-cast aluminum, round, available in 3 different colors with matching cord colors: white and brushed nickel (both with white cord), and bronze (with black cord).

## ELECTRICAL

**Voltage:** 12V DC

**Power Consumption:** 4.2 Watts

**Lumens:** 200 Lumens @ 3000K / 180 Lumens @ 4200K

**Light Source:** 3 LEDs

**Efficacy:** 50 LPW @ 3000K

**Life Expectancy:** 30,000 Hours

**Maximum Length:** Ten daisy-chained per run.

## Labels and Warranty

cULus Listed for Damp Location

RoHS Compliant

Title 24 Compliant

California Energy Commission

Three Year Warranty



## 12V LED Puck Light

**NMPK1-3LED30BZ:** 12V LED Puck Light, 3000K, Bronze

**NMPK1-3LED30C:** 12V LED Puck Light, 3000K, Chrome

**NMPK1-3LED30W:** 12V LED Puck Light, 3000K, White

**NMPK1-3LED42BZ:** 12V LED Puck Light, 4200K, Bronze

**NMPK1-3LED42C:** 12V LED Puck Light, 4200K, Chrome

**NMPK1-3LED42W:** 12V LED Puck Light, 4200K, White

# NORALIGHTING.

Type

Project

Catalog No.

Lamp/Wattage

## ACCESSORIES

Item Number	Description
NMPKA-RECBZ	Recess Mount for LED Puck, Bronze
NMPKA-RECC	Recess Mount for LED Puck, Chrome
NMPKA-RECW	Recess Mount for LED Puck, White
NAPK-701B	Splitter, Black
NAPK-701W	Splitter, White
NAPK-702B	2" Interconnection Cable, Black
NAPK-702W	2" Interconnection Cable, White
NAPK-703B	3" Interconnection Cable, Black
NAPK-703W	3" Interconnection Cable, White
NAPK-706B	6" Interconnection Cable, Black
NAPK-706W	6" Interconnection Cable, White
NAPK-712B	12" Interconnection Cable, Black
NAPK-712W	12" Interconnection Cable, White
NAPK-724B	24" Interconnection Cable, Black
NAPK-724W	24" Interconnection Cable, White
NAPK-736B	36" Interconnection Cable, Black
NAPK-736W	36" Interconnection Cable, White
NAPK-748B	48" Interconnection Cable, Black
NAPK-748W	48" Interconnection Cable, White
NAPK-709B	18" Power Line Interconnector, Black
NAPK-709W	18" Power Line Interconnector, White
NAPK-711B	12" Power Line Interconnector with Switch, Black
NAPK-711W	12" Power Line Interconnector with Switch, White
NAPK-713B	Mini Coupler, Black
NAPK-713W	Mini Coupler, White

## LED DRIVERS

### HARDWIRE DRIVERS

Item Number	Description
NAPK-530HW/12	12V 30W Class II Hardwired Electronic LED Driver
NAPK-560HW/12	12V 60W Class II Hardwired Electronic LED Driver
NMT-36/12C2D1	120V/12V 36W Dimmable Class II Remote Hardwire Magnetic Driver w/Regulator
NMT-36/12C2D2	277V/12V 36W Dimmable Class II Remote Hardwire Magnetic Driver w/Regulator
NMT-60/12C2D1	120V/12V 60W Dimmable Class II Remote Hardwire Magnetic Driver w/Regulator
NMT-60/12C2D2	277V/12V 60W Dimmable Class II Remote Hardwire Magnetic Driver w/Regulator
NMT-244/12C2D1	120V/12V 240W Dimmable Class II Remote Hardwire Magnetic Driver w/Regulator
NMT-244/12C2D2	277V/12V 240W Dimmable Class II Remote Hardwire Magnetic Driver w/Regulator

### PLUG-IN DRIVERS

NAPK-524/12	12V 24W Direct Plug-In LED Driver
NAPK-550/12	12V 50W Direct Plug-In LED Driver

### DRIVER ACCESSORIES

NAPK-10	Replacement 10' Power Line Connector for NMT Series
NAPK-30	Replacement 30' Power Line Connector for NMT Series
NATL-415	Low Voltage Splice Box
NRA-125/6	6" Extension Cord for NAPK-530HW/12 & NAPK-560HW/12
NRA-125/12	12" Extension Cord for NAPK-530HW/12 & NAPK-560HW/12
NRA-125/18	18" Extension Cord for NAPK-530HW/12 & NAPK-560HW/12
NRA-125/72	72" Extension Cord for NAPK-530HW/12 & NAPK-560HW/12
NRA-6035W/6	6' Cord and Plug for NAPK-530HW/12 & NAPK-560HW/12
NRA-6035W/10	10' Cord and Plug for NAPK-530HW/12 & NAPK-560HW/12
NUSP-JBox	Junction Box required for hardwiring NAPK-530HW/12 & NAPK-560HW/12


# NORALIGHTING.

6505 Gayhart St., Commerce, CA 90040  
www.noralighting.com • Specifications subject to change without notice. © 2012  
Phone: 800.686.6672 • FAX: 800.500.9955 • e-mail: nora@noralighting.com

# LED Puck Light Optional Accessories

## Splitter


Allows splitting the puck light from a run or , into four separate runs or pucks.



**NAPK-701B:** Splitter, Black  
**NAPK-701W:** Splitter, White

## Power Line Interconnector



To connect a Puck Light run directly to LED Driver.



**NAPK-709B:** 18" Power Line Interconnector, Black  
**NAPK-709W:** 18" Power Line Interconnector, White

## Recess Mount


For LED Puck



**NMPKA-RECBZ:** Recess Mount for LED Puck, Bronze  
**NMPKA-RECC:** Recess Mount for LED Puck, Chrome  
**NMPKA-RECW:** Recess Mount for LED Puck, White

## Interconnection Cable


The interconnection cables allow for linking of any puck lights in any direction or extension of power line interconnectors when used with coupler. Interconnection cables may be joined together for custom lengths when used with coupler.



**NAPK-702B:** 2" Interconnection Cable  
**NAPK-702W:** 2" Interconnection Cable  
**NAPK-703B:** 3" Interconnection Cable  
**NAPK-703W:** 3" Interconnection Cable  
**NAPK-706B:** 6" Interconnection Cable  
**NAPK-706W:** 6" Interconnection Cable  
**NAPK-712B:** 12" Interconnection Cable  
**NAPK-712W:** 12" Interconnection Cable  
**NAPK-724B:** 24" Interconnection Cable  
**NAPK-724W:** 24" Interconnection Cable  
**NAPK-736B:** 36" Interconnection Cable  
**NAPK-736W:** 36" Interconnection Cable  
**NAPK-748B:** 48" Interconnection Cable  
**NAPK-748W:** 48" Interconnection Cable

## Power Line Interconnector with Switch


Allows for individual switching on any Puck Light run. Connects a Puck Light run directly to LED Driver.

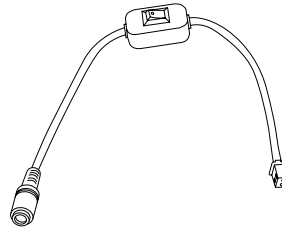

**NAPK-711B:** 12" Power Line Inter. w/Switch, Black  
**NAPK-711W:** 12" Power Line Inter. w/Switch, White

## Mini Coupler

Used to connect two interconnection cables together. Can also be used to extend power line interconnectors. One is included with every Puck Light.




**NAPK-713B:** Mini Coupler, Black  
**NAPK-713W:** Mini Coupler, White

# 12V LED Puck Light Drivers

## 30W 12V Class II Hardwire Electronic LED Driver


Allows hardwiring Tape Light run by using NUSP-JBox. Can also be converted into direct plug-in driver by using NRA-6035. Requires power line interconnection cable. Non-Dimmable.

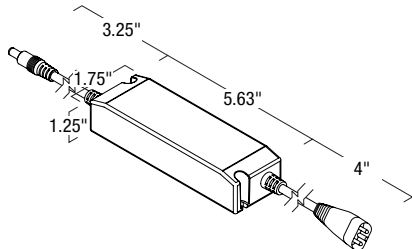

**NAPK-530HW/12:** 12V 30W Class II Hardwire Driver

## 12V Direct Plug-In LED Drivers


Allows direct connection a wall outlet with 6' cord and plug and 60" power line connector. Requires power line interconnection cable. Non-Dimmable.

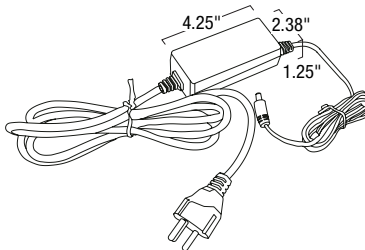

**NAPK-550/12:** 12V 50W Direct Plug-In LED Driver

## 60W 12V Class II Hardwire Electronic LED Driver


Allows hardwiring Tape Light run by using NUSP-JBox. Can also be converted into direct plug-in driver by using NRA-6035. Requires power line interconnection cable. Non-Dimmable.

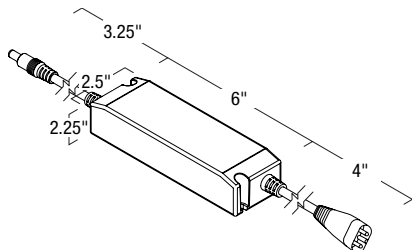

**NAPK-560HW/12:** 12V 60W Class II Hardwire Driver

## 12V Class II Dimmable Hardwire LED Driver


Allows hardwiring Puck Light and Tape Light run and dimming with Magnetic Low Voltage Dimmer. Includes 10' power line connector (NAPK-10). Requires power line interconnection cable. Manual reset thermal circuit - secondary side. Integral regulator for constant current and voltage. Can be mounted 30' from start of fun.



**NMT-36/12C2D1:** 120V/12V 36W C2 Dimm. Driver  
**NMT-36/12C2D2:** 277V/12V 36W C2 Dimm. Driver  
**NMT-60/12C2D1:** 120V/12V 60W C2 Dimm. Driver  
**NMT-60/12C2D2:** 277V/12V 60W C2 Dimm. Driver

## 12V Direct Plug-In LED Drivers


Allows direct connection a wall outlet with 47" cord and plug. Requires power line interconnection cable. Non-Dimmable.

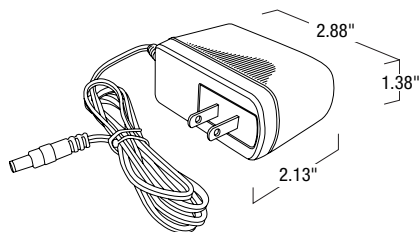

**NAPK-524/12:** 12V 24W Direct Plug-In LED Driver

## 240W 12V Class II Dimmable Hardwire LED Driver

Includes four 60W breakers, which allows hardwiring four Tape Light runs and dimming with Magnetic Low Voltage Dimmer. Includes (4) 10' power line connector (NAPK-10). Requires power line interconnection cable. Manual reset thermal circuit - secondary side. Integral regulator for constant current and voltage. Can be mounted 30' from start of fun.

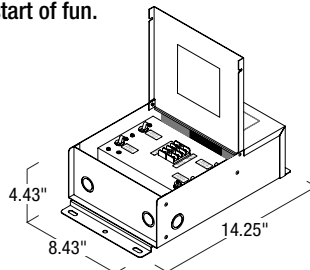


**NMT-244/12C2D1:** 120/12V 240W C2 Dimm. Driver  
**NMT-244/12C2D1:** 277/12V 240W C2 Dimm. Driver

# 12V LED Puck Light Drivers Accessories

## Replacement Power Line Connector


For use with NMT Series. Replaces included 10' lead wire, to allow for 30' or less length between Puck Light/Tape Light run and LED Driver.



**NAPK-10:** 10' 12V Power Line Connector  
**NAPK-30:** 30' 12V Power Line Connector

## Cord and Plug for NAPK-530HW/12 or NAPK-560HW/12


Used to convert NAPK-530HW/12 or NAPK-560HW/12 into a direct plug-in driver.



**NRA-6035W/6:** 6' Cord and Plug  
**NRA-6035W/10:** 10' Cord and Plug

## Low Voltage Splice Box


Use to join Romex® low voltage lead to power line connector.



**NATL-415:** Low Voltage Splice Box

## Junction Box for Hardwiring


Required for hardwiring NAPK-530HW/12 or NAPK-560HW/12. Can be used to feed to separate runs. Accepts Romex®.



**NUSP-JBox:** Junction Box for Hardwiring


## Extension Cord for NAPK-530HW/12 or NAPK-560HW/12

Used to extend length between NUSP-JBox and NAPK-530HW/12 or NAPK-560HW/12. Can be joined together to create custom lengths.



**NRA-125/6:** 6" Flexible Extension Cord  
**NRA-125/12:** 12" Flexible Extension Cord  
**NRA-125/18:** 18" Flexible Extension Cord  
**NRA-125/72:** 72" Flexible Extension Cord

# Suggested Layouts

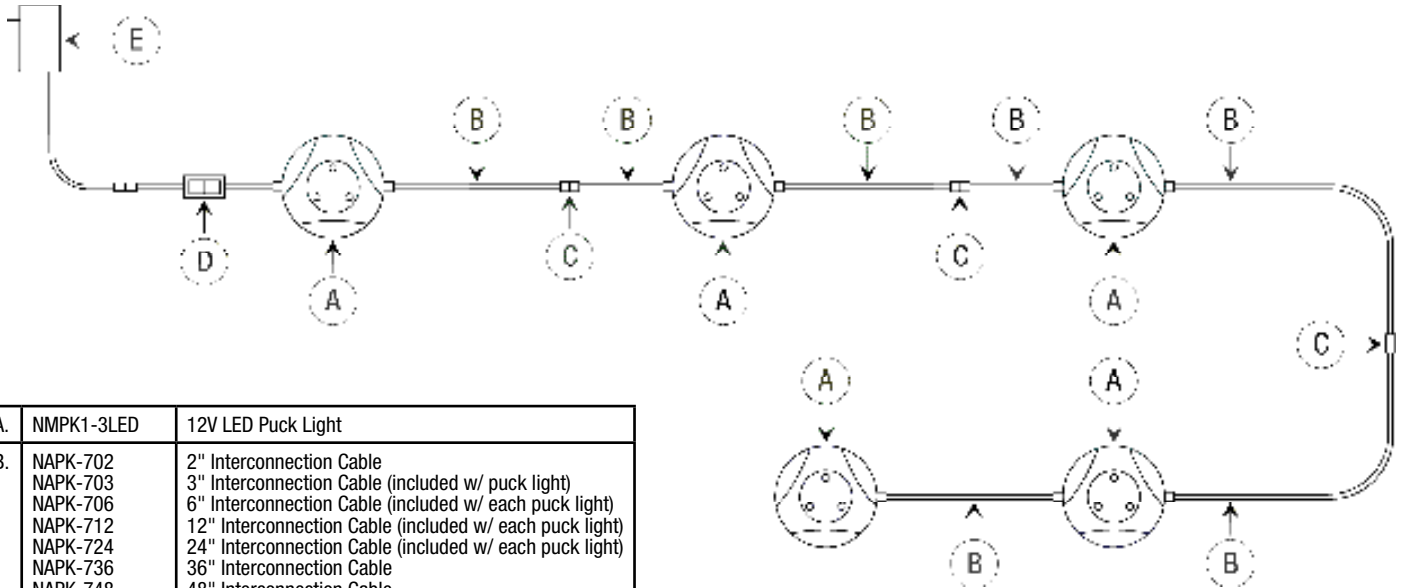

A.	NMPK1-3LED	12V LED Puck Light
B.	NAPK-702 NAPK-703 NAPK-706 NAPK-712 NAPK-724 NAPK-736 NAPK-748	2" Interconnection Cable 3" Interconnection Cable (included w/ puck light) 6" Interconnection Cable (included w/ each puck light) 12" Interconnection Cable (included w/ each puck light) 24" Interconnection Cable (included w/ each puck light) 36" Interconnection Cable 48" Interconnection Cable
C.	NAPK-713	Mini Coupler (included w/ each puck light)
D.	NAPK-711	12" Power Line Interconnector with Switch
E.	NAPK-524/12	12V 24W Direct Plug-In LED Driver

A.	NMPK1-3LED	12V LED Puck Light
B.	NAPK-702 NAPK-703 NAPK-706 NAPK-712 NAPK-724 NAPK-736 NAPK-748	2" Interconnection Cable 3" Interconnection Cable (included w/ each puck light) 6" Interconnection Cable (included w/ each puck light) 12" Interconnection Cable (included w/ each puck light) 24" Interconnection Cable (included w/ each puck light) 36" Interconnection Cable 48" Interconnection Cable
C.	NAPK-701	Splitter
D.	NAPK-709	18" Power Line Interconnector
E.	NAPK-10	10' Power Line Connector (included w/NMT-60/12C2D1)
F.	NMT-60/12C2D1	120V/12V 60W Class II Dimmable LED Driver

