



NORA LIGHTING

illuminating the *future*

POCKET GUIDE SEVENTH EDITION

LED

RECESSED

MULTIPLE LIGHTING SYSTEM

PENDANTS, SCONCES AND GLASS

NORA RAIL

TRACK

SPECIALTY

MINI TRACK

MINI RAIL

TRANSFORMERS

EXIT & EMERGENCY

Nora Pocket Guide

Product Family Color Codes



RECESSED

LED, HID-CMH, CFL, Low Voltage,
Line Voltage, Step Light, Retrofit



MLS Multiple Lighting Systems
HID-CMH, Low Voltage, Line Voltage



PENDANTS & SCONCES

LED, Low Voltage, CFL, Incandescent



NORA RAIL - Line Voltage
LED, Low Voltage, HID-CMH, CFL, Line Voltage



TRACK
LED, HID-CMH, CFL, Low Voltage, Line Voltage



SPECIALTY LINEAR & ACCENT

LED, CFL, Low Voltage, Line Voltage



MINI TRACK - Low Voltage
LED, Xenon, Incandescent



MINI RAIL - Low Voltage
LED, Halogen Incandescent



TRANSFORMERS
Class II, Electronic, Magnetic



EXIT AND EMERGENCY

LED, Tritium, Incandescent

Large enough to do it right, small enough to care.

At Nora Lighting, our clients are at the heart of everything we do. We take their goals seriously, and see their success as our own.

Our commitment to our clients, and our desire to strive for excellence are the base of Nora's corporate culture, as well as the guiding principles in its mission statement that has guided the company since its inception more than 20 years ago.

We support and champion the technological development of lighting products that meet or exceed the highest international standards of design, craftsmanship, quality, performance, and energy-efficiency. We strive to exceed our customers expectations with superior products and exceptional customer service. We pursue these goals with ethical, sound and honest business practices.

Over the past 20 years, Nora Lighting has worked diligently to live up to these goals while offering a product line that continues to set benchmarks for the innovation, quality, and performance that have set us apart from our competitors. We are proud of the long-term relationships we have sustained over the years with our valued customers and dedicated sales team. The entire Nora staff is always ready to respond to their needs in any way possible.

*"Nora could never
have accomplished
so much without
the support of our
customers, reps and
a dedicated staff."*



New Representatives Training Conference

TABLE OF CONTENTS

Introduction	1
New Products	4

RECESSED LIGHTING 9

Trim Finishes	
LED	12
LED Lighting & Information	12
4", 5", 6" LED Diamond Series	16
4", 5", 6" LED Platinum Series	20

Compact Fluor. and GU24 Base	
CF Dimming Options & Information	22
8" CF Horizontal Arch. & Comm.	23
6" CF Horizontal Triple Arch. & Comm.	24
6" CF Horizontal Quad Arch. & Comm.	25
8" CF Vertical Arch. & Comm.	26
6" CF Vertical Arch. & Comm.	27
6" CF Shallow Horizontal	28
6" CF Vertical Economy - 1 Lamp	29
6" CF Vertical Economy - 2 Lamp	32
6" CF Sloped Ceiling	33
5" CF Vertical Economy	34
4" CF Economy	36
4" CF High Performance Economy	37
6" CF GU24 Base	38
5" CF GU24 Base	39
4" CF GU24 Base	39

HID	
8" HID Architectural & Commercial	40
6" HID Architectural & Commercial	41
4" HID Architectural	42
6" HID Economy	43

Low Voltage	
6" Low Voltage	44
4" Low Voltage Framing Projector	46
4" Low Voltage	47
4" Low Voltage Shallow	47
TRUE 3" Low Voltage	50

Line Voltage	
8" Line Voltage Arch. & Comm.	52
6" Line Voltage Arch. & Comm.	53
6" Line Voltage Economy	54
5" Line Voltage Economy	58
4" Line Voltage Economy	60
4" Line Voltage MR16 GU10	62
TRUE 3" Line Volt MR16 GU10	64
6" Line Voltage Slope Ceiling	65

Retrofit Recessed	66
Square Recessed	67

Step Lighting	
Mini Step Lights	68
Step Lights	69

Accessories	
Fire Rated Enclosure	70
Hole Cutter	70
Trim & Housing Accessories	71

MULTIPLE LIGHTING SYSTEM 73

Recessed	
Metal Halide	74
Low Voltage	76
Line Voltage	77

Surface Mount	
Low Voltage	78

PENDANTS AND SCONCES 79

Glass Shades	80
Pendant Assemblies	94
Rail Mount	95
Mini Rail Mount	95
Track Mount	96
Mini Track Mount	96
Monopoint Canopies	97
Multi QuickJack Canopies	97
QuickJack Pendant System	98

Complete Pendants	100
Wall Sconces	102
Compatibilities Chart	104

NORA RAIL 107

LED Fixtures	108
Line Voltage Fixtures, GU10	109
Line Voltage Par Fixtures	111
Low Voltage Fixtures	112
QuickJack & Complete Fixtures	114
HID Fixtures	117
Fluorescent Fixtures	120
Specialty Fixtures	121
Nora Rail Kits	122
Rail Pendants	124
Nora Rail System Components	126
Nora QuickJack Components	127
Nora Rail Accessories	128

TABLE OF CONTENTS

TRACK 135

LED Track Fixtures	136
HID Track Fixtures	138
Compact Fluor. Track Fixtures	145
Low Voltage Track Fixtures	148
Line Voltage Track Fixtures	157
Track Mount Pendants	165
Track Current Limiter	166
1 & 2-Circuit Track System	167
Track System Accessories	168

SPECIALTY LIGHTING 173

LED Lightbar	174
LED Tape Light	
LED Tape Light	176
High Output LED Tape Light	178
RGB Color Changing LED Tape Light	180
Ultra Slim T5 Fluorescent Under Cab.	182
Mini Inch Fluorescent Under Cab.	183
1-3/4" Fluorescent T8/T12 Under Cab.	183
Line Voltage Halogen Under Cabinet	184
Low Voltage Halogen Under Cabinet	184
LED Puck Light	185
Mini Low Voltage Puck Lights	186
Mini Solutions Downlights	187
Decolume Linear Lighting	193
Duralight (Rope Light)	
Duralight LED System	195
Duralight 2-Wire Line Voltage	196
Duralight 2-Wire Low Voltage	197
Duralight 3-Wire Line Voltage	198
Duralight Accessories	199

MINI TRACK LIGHTING 201

Linear Accent Lighting Fixtures	202
Halogen spot lights Fixtures	203
Mini Track Pendants	204
Mini Track & Accessories	205

NORA MINI RAIL 207

Mini Rail Fixtures	209
Mini Rail & Accessories	210

TRANSFORMERS & DRIVERS 211

Class II Transformers	212
Electronic Transformers	213
Transformer Enclosure Boxes	214
Magnetic Transformers	214
Replacement Electronic Ballast	214
Recessed Replacement Transformers	215

EXIT AND EMERGENCY 217

LED Edge-Lit Exit Signs	218
Self Diagnostic LED Die-Cast Exit	218
Universal LED Exit Signs	219
Wet Location Exit Signs	219
Self-Illuminating Tritium Exit	220
Steel Exit & Emergency	220
Wet Location Exit-Emergency	221
Deco Emergency Light	221
Emergency Lights	222
Emergency Remote Heads	223
Exit & Emergency Accessories	224
Recessed Emergency Units	225
Emergency Low Voltage Downlight	225
CF Emergency Downlight Retrofit Kit	226

INDEX 227



NEW ENERGY SAVING LED

p 18



4", 5", 6" LED Diamond Series
Retrofit, New Construction and Remodel

p 20



4", 5", 6" LED Platinum Series
New Construction and Remodel

p 176



LED Tape Light
12V and 24V, Wet Location

p 180



16 Selectable Colors
RGB Color Changing LED Tape
12V and 24V, Wet Location

p 178



High-Output LED Tape Light
24V, Wet Location

p 174



LED Lightbar
Ultra Low Profile, Linear LED System

p 185



LED Puck Light
12V, Architectural Style, Energy Efficient

p 100



Saria LED Monopoint Pendants
Contemporary Style, Energy Efficient

p 137



Robo LED Track and Rail Fixture
3W, Excellent Beam Control

p 136



18W Pillar LED Track Fixture
High Output, Energy Efficient

p 222



Mini LED Emergency Light
200 Lumens

p 218



Adjustable LED Edge-Lit Exit
Ceiling, Wall, End Mount or Recessed

NEW RECESSED

p 48 & 60



4" Square Trims
CFL, Low Voltage and Line Voltage

p 38



4", 5", 6" GU24 Based Housings
Utilize Self-Ballasted Lamp

p 47



4" Shallow Low Voltage Housings
IC, New Construction and Remodel

p 58



5" Shallow Line Voltage Housings
New Construction and Remodel

p 28



6" Shallow Horizontal CF Housings
New Construction and Remodel

p 67



8" Shallow Square CMH Housings
Electronic

p 64



True 3" Line Voltage GU10 Housings
IC, New Construction and Remodel

p 47



Reduce Wattage, Low Volt. Housings
IC, New Construction and Remodel

p 26 & 27




6" and 8" Remodel Frame-Ins
HID, CFL and Line Voltage

p 23, 25-27, 40-41, 52-53, 57, 59, 61-62



4", 5", 6", 8" Glass Trims
Reflector with Low Profile Glass

p 11



Custom Combinations
of Reflector/Baffle and Ring Finishes

p 70



Firebox with Housing
One Hour Fire Rated

NEW!

NEW TRACK

p 148



V-Tec Low Voltage Series
Vertical Transformer

p 139



Vanguard CMH Series
Architectural Die-Cast Aluminum

p 143



H, J, and L Style Track Fixtures
Specify with H, J, or L, Style Adapter

p 144



Brilliance CMH Series
Wall Wash and Low Profile Spot

p 170



Retrofit Track Adapters
for Existing 4" and 6" Recessed

p 96
p 165



Energy Efficient Track Pendants
GU24 CFL, Candelabra, Medium Base

NEW EXIT & EMERGENCY

p 221



LED Wet Location Exit Combo
Sealed unit for harsh environments

p 223




Wet Label Remote Emergency
Single & Double Adjustable Heads

p 220



Steel LED Exit and Emergency
New York approved

p 221



Deco Emergency Light
Wet Label, LED Photosensor option

p 221



Emergency w/ Remote Capability
Wet Location, Sealed

p 220



Self-Illuminating Tritium Exit
No electricity required, Wet Location

NEW NORA RAIL

p 122



4' Straight Rail Kit w/ Mercure
Line Voltage, assorted colors, finishes

p 122



2' Suspended Circle Rail Kit w/ Swift
Line Voltage, assorted colors, finishes

p 123



6'-6" Straight Rail Kit w/ Neptune
Line Voltage, assorted colors, finishes

p 123



8' S-Curve Rail Kit w/ Neat
Line Voltage, assorted finishes

p 123



6'-6" Straight Rail Starter Kit
Fixtures sold separately

p 123



8' S-Curve Rail Starter Kit
Fixtures sold separately

NEW PENDANTS & SCONCES

p 94



Energy Efficient Pendants
G9, GU24 CFL, Candelabra, Medium Base

p 97



Multi QuickJack Canopies
Round and Linear Configurations

p 102



Nora Wall Sconces
GU24 CFL, G9 Halogen, Candelabra,
Bi-Pin and Medium Base

p 103



Concord Wall Sconce
ADA Compliant



RECESSED



REFLECTOR FINISHES ARCHITECTURAL & COMMERCIAL

Architectural and Commercial grade reflectors and trims are available in a variety of color options in specification grade, American-made[®] finishes as well as our standard high-quality finishes. See individual reflector listings for available finishes for a particular trim.



LI Clear Low Iridescent Alzak[®] Reflector



PELI Pewter Low Iridescent Alzak[®] Reflector



C Specular Clear Reflector



BLI Specular Black Low Iridescent Alzak[®] Reflector



STLI Straw Low Iridescent Alzak[®] Reflector



CLI Specular Clear Low Iridescent Reflector



BZLI Bronze Low Iridescent Alzak[®] Reflector



WHLI Wheat Low Iridescent Alzak[®] Reflector



G Specular Gold Reflector



HZLI Haze Low Iridescent Alzak[®] Reflector



B Specular Clear Reflector with Black Baffle



B Specular Black Reflector



CGLI Champagne Gold Low Irid. Alzak[®] Reflector



W Specular Clear Reflector with White Baffle



W Specular White Reflector



GLI Gold Low Iridescent Alzak[®] Reflector

TRIM FLANGE OPTIONS ARCHITECTURAL & COMMERCIAL

See individual trim listings for available flange options for a particular trim.



SF Self Flange
Flange same finish as Reflector



WF White Flange



Reflector with Ring

STANDARD TRIM FINISHES ECONOMY & LIGHT COMMERCIAL

Nora Lighting's 3", 4", 5" and 6" reflectors and trims for incandescent, low voltage, compact fluorescent and ceramic metal halide sources feature high-quality finishes in a variety of color options. See individual trim listings for available finishes for a particular trim.



C Specular Clear



HZ Haze



White Metal Baffle



BZ Bronze



G Specular Gold



White Phenolic Baffle



N Natural Metal



B Specular Black Refl.



Black Metal Baffle



CO Copper



W Specular White Refl.



Black Phenolic Baffle

CUSTOM COMBINATIONS

CC

Nora Lighting offers custom combinations of reflector/baffle and ring finishes on any 3", 4", 5" or 6" trim designated with the CC logo. Custom Combinations allow the specifier, designer, distributor or customer to select both the reflector or baffle finish and the ring finish to meet specific design criteria or personal preference.

Reflector and baffle finishes vary by trim and the selected finish must be available in the trim chosen. All finishes are not available in all trim series. Trim rings come in metal and plastic, standard and oversize widths. Metal ring finishes include Black, Bronze, Chrome, Copper, Gold, Natural Metal and White. Plastic trim rings are available in Black, Chrome, Gold and White. Custom Combinations are modified at the factory to your exact needs. Example:



NTM-34 (Base Trim)
6" Bronze Baffle with
Bronze Metal Ring



NTM-34/NOR-30G
6" Bronze Baffle with
7/8" Gold Plastic Ring



NTM-34/NMR-30W
6" Bronze Baffle with
5/8" White Metal Ring

See complete selection of trims rings page 71

LED LIGHTING

What is LED?

The Light Emitting Diode...LED

Basically, LEDs are tiny light bulbs, or semiconductor diodes, that fit easily into an electrical circuit. But unlike ordinary incandescent lamps, they do not have a filament that burns out or gets hot. The diodes emit light when partnered with an electrical current and are illuminated solely by the movement of electrons in the semiconductor material.

The LED is called solid state lighting or "SSL" because light is emitted from a solid object, the semiconductor diode, instead of a vacuum or gas tube (like an incandescent, fluorescent or HID lamp). The diode itself is a two-terminal crystalline and when an electrical current passes through it, the recombination of positive and negative charges results in the emission of visible light. Less than one millimeter square, individual LEDs are clustered on a circuit board to create an array, which is then incorporated into a light fixture.


Longer Performance Life

LEDs have a rated life based on the time it takes for the light output to decrease to 70% of the original output, which is typically about 50,000 hours or 17 years of normal use. A typical incandescent fixture will need to be re-lamped 10 or more times during the life of an LED fixture.

As LED chips increase in lumens and efficacy, the lighting industry is focused on producing better performing products. With higher lumen-per-watt LEDs being introduced everyday, the future for LEDs is bright. Within the next decade LEDs are expected to be the dominant light source...a clean and green alternative for homes, cities and business.

"...no other lighting technology offers as much potential to save energy and enhance the quality of our building environments, contributing to our nation's energy and climate change solutions."

*Energy Efficiency and Renewable Energy Section
U.S. Department of Energy*



LED LIGHTING

Lighting Facts and Nora Lighting

Who is Lighting Facts? Lighting Facts is sponsored by the Department of Energy (DOE) and is a program to assure that LED lighting products are represented accurately in the market.

Why was the Lighting Facts Label established?

The Lighting Facts label tells specifiers and consumers exactly what they can expect and gives them the reassurance that Nora LEDs perform to the stated levels. To show this, in a label similar to the Nutrition Facts, we supply the model number and all performance results within. The label is used on all marketing materials and packaging.



What does this mean for Nora? We can directly answer the question: Do your LED lighting products really perform as promised? As we know, not all LEDs do. With the Lighting Facts label, there is no question Nora's LED products are superior in our industry and backed by the most prominent energy-efficient and government agencies.

Committed to Green



Nora Lighting has been a partner with Energy Star[®] since 2005.

LED RECESSED LIGHTING

LED Diamond Retrofit Series

Nora's newest family of LED recessed luminaires is uniquely designed using Cree® LEDs for retrofit applications, but can also be used in new construction and remodel applications. "RETROFIT" refers to an application where an existing housing installed in commercial, public, or a residential space is converted to another light source without having to remove the existing housing. Nora's LED Diamond Series has been designed and tested to cULus standards to be used in Nora existing housings as well as many other manufacturers' housings. The Diamond can also be specified for use with Nora dedicated housings. The ability to use the Nora LED Diamond Series in existing housings allows for easier, lower cost, replacement of an existing light source improving the pay-back factor when changing to LED Energy Saving lighting.

LED Platinum Series

Nora's first generation of LED recessed lighting is designed for new construction and remodel applications. Time tested in commercial, national account and residential applications across the US, the LED Platinum Series uses a separate LED module and a dedicated housing with an outboard mounted LED driver system allowing for excellent heat management. The Platinum series uses high output Osram® LEDs producing as much as 710 lumens. The die-cast aluminum LED module is integral to the die-cast low profile flange.

What is a "Dedicated" Housing and why use one?

Both the Nora Diamond and Platinum Series of recessed LED luminaires can be specified for use with respective "dedicated" housings. "Dedicated" refers to a housing, new construction or remodel, that can only be used with and is only cULus listed for use with a specific Nora LED recessed module. These housings come with a unique connector that can only be used with the respective Platinum or Diamond LED module.

Many local and national codes require the use of a "dedicated" LED unit to meet energy savings requirements for building energy codes, LEED's points, and energy rebates. Because the "dedicated" housing requires and is cULus listed for the use of a specific Nora LED modules the end user cannot use or convert the installed "dedicated" housing to another low efficacy source. This can be very important to lighting specifiers and end users expecting a performance level and visual appearance as found in only the Nora LED unit.

LED RECESSED LIGHTING

LED Diamond and Platinum Features		
FEATURES	DIAMOND	PLATINUM
Deep set lens for visual comfort and glare control	X	X
Wet Label cULus Listed	X	X
2700K, 3000 and 4000K Color temperatures (CCT)	X	
3000K & 4200K Color temperatures (CCT)		X
Die-cast aluminum reflector and flange		X
cULus Listed for Retrofit applicaion in existing housings	X	
Available for new construction or remodel applications	X	X
Die-Cast aluminum LED module and outboard mounted driver		X
UTM heat management system	X	
Available in 4", 5" and 6"	X	X
Osram® LED package		X
Cree® LED package	X	
Dimmable with incandescent dimmer	X	X
Available with emergency battery back-up		X
Available in 277 Volt		X
Die-Cast reflectors available in 4 finishes		X
High grade spun aluminum reflector and baffles in 7 finishes	X	
Approved "Lighting Facts" available	X	X
CEC approved and listed	X	X
Meets Title 24 requirements	X	X
Dedicated new conctruction and remodel housings	X	X
cULus Listed	X	X
Energy Star Listed	X	X*
IC and Air Tight rated	X	X
Tested in accordance with LM79 and LM80	X	X

*6 inch only

LED DIAMOND SERIES

Easily replace your existing medium based incandescent lamp with an energy efficient LED. No tools required!



FEATURES

- 7 year limited warranty
- Smooth dimming down to 5%
- Title 24 & ENERGY STAR® Compliant
- Qualifies for LEEDS points and Energy Rebates
- cULus Listed, Damp Location series and Wet Location series
- Tested in accordance with IESNA LM79 & LM80
- Scientifically designed lens diffuses the LED image while providing high lumen output; standard on all trims
- 5" & 6" produces 650 Lumens using only 11.8W. 4" unit produces 530 Lumens using only 10W
- 2700K, 3000K and 4000K at 91 & 86 CRI
- Long life LEDs up to 50,000 hours
- Lighting Facts approved
- Save 75% compared to Incandescent source
- Available in 3 configurations: For medium based housings, GU24 optional socket, and dedicated hardwire with quick connect
- No ultraviolet or infrared wavelengths that cause fading of artwork and perishable merchandise. Mercury free!
- Does not emit forward heat like traditional light sources
- Available in Reflector and Baffle style in Bronze, Copper, Natural Metal, Haze, Clear, Black and White finishes

Business and residential customers are switching to LEDs to save money and the environment



65W BR30
Incand.



18W
CFL



12W LED
Source

Fixture energy cost for 50,000 hrs.	\$3,250	\$900	\$750
Life in years	.67 Years	4.1 Years	17 Years
Useable Light (fc)*	24.2	21.9	22.6
Energy Star Qualified	No	Yes	Yes

*Average footcandles at 8' mounting height, 20' x 20', multiple units, spaced at 6' O.C.

LED DIAMOND SERIES

LED Diamond Retrofit

Qualifies for LEEDS points and energy rebates

7 YEAR
LIMITED WARRANTY

Quick Connects

Easily connect the LED Retrofit to an existing or new housing

Dimmable Integral Driver

2-wire dimming down to 10% with standard Incandescent dimmer. For optimum 5% dimming and minimal loads use electronic low voltage dimmer

Medium Screw Base

Optional GU24 adapter available

UTM - Unitized Thermal Management System

Fins dissipate heat

LEDs

2700K, 3000K and 4000K, 91 to 86 CRI
10W 4"
11.8W 5" & 6"

UL Classified

for use in 4", 5" and 6" IC or Non-IC housings by Nora and others

Apertures

3-7/8", 4-5/8" and 5-1/4"
Small size with high Lumen output

cULus Listed

Damp Location series
WET Location series (Except 4")

Reflector or Baffle

Self-Flanged Spun Aluminum

Diffused Lens

Deep set for excellent visual comfort

Environment Friendly

No Mercury, ultraviolet, or infrared wavelengths



LED DIAMOND SERIES 4", 5" AND 6" LED RETROFIT NEW CONSTRUCTION & REMODEL

Nora's high output LED Retrofit recessed downlights incorporate the highest quality Cree LED package and Nora's UTM System. Title 24 and Energy Star qualified, with a 7-year limited warranty. Available in several reflector and baffle finishes, high CRI and dimmable down to 5%.





LED



NLEDC-6 Dedicated
NLEDR-6 Retrofit
6" LED

NLEDC-5 Dedicated
NLEDR-5 Retrofit
5" LED

NLEDC-4 Dedicated
NLEDR-4 Retrofit
4" LED






















CATALOG. NO.	TRIM	COLOR TEMP.	FINISH
NLEDC - Dedicated NLEDR - Retrofit <i>* LED Dedicated unit includes Quick Connect for use with Dedicated Remodel and New Construction Nora housings.</i>	661 - 6" Reflector	27 - 2700K	BW
	 671 - 6" Reflector, Wet Label	30 - 3000K	BZBZ
	662 - 6" Baffle	40 - 4000K	COCO
	 672 - 6" Baffle, Wet Label		CW*
	561 - 5" Reflector		HWZ*
	 571 - 5" Reflector, Wet Label		NN
	562 - 5" Baffle		WW
	 572 - 5" Baffle, Wet Label		
	461 - 4" Reflector		
	462 - 4" Baffle		

Order Example: NLEDR-66230BZBZ





















* Not available in Baffle

DIAMOND SERIES COMPATIBLE NORA HOUSINGS

NEW CONSTRUCTION

 NSIC-401QAT	4" ICAT Line Voltage
 NS-401QAT	4" AT Line Voltage
  NHIC-4G24AT	4" ICAT GU24
   NHIC-4LMRAT	4" ICAT Dedicated LED
 NHIC-501QAT	5" ICAT Line Voltage
NH-501Q	5" Line Voltage
  NHIC-5G24ATFL	5" ICAT GU24
   NHIC-5LMRAT	5" ICAT Dedicated LED
 NHIC-17QAT	6" ICAT Line Voltage
 NHIC-17QNBAT	6" ICAT Line Voltage (No Bracket)
NH-26Q	6" Line Voltage
NH-26QNB	6" Line Voltage (No Bracket)
   NHIC-6G24ATFL	6" ICAT GU24
   NHIC-6LMRAT	6" ICAT Dedicated LED

REMODEL

 NSR-404QAT	4" AT Line Voltage
  NHRIC-4G24AT	4" ICAT GU24
   NHRIC-4LMRAT	4" ICAT Dedicated LED
 NHRIC-504QAT	5" ICAT Line Voltage
NHR-504Q	5" Line Voltage
  NHRIC-5G24ATFL	5" ICAT GU24
   NHRIC-5LMRAT	5" ICAT Dedicated LED
 NHRIC-17QAT	6" ICAT Line Voltage
 NHRIC-17QNBAT	6" ICAT Line Voltage (No Bracket)
NHR-26Q	6" Line Voltage
   NHRIC-6G24ATFL	6" ICAT GU24
   NHRIC-6LMRAT	6" ICAT Dedicated LED

LED DIAMOND SERIES

4", 5" AND 6" LED RETROFIT

NEW CONSTRUCTION & REMODEL

REFLECTOR / FLANGE FINISHES



BW
Black Reflector
White Flange



BZBZ
Bronze Reflector
Bronze Flange



COCO
Copper Reflector
Copper Flange



CW
Clear Reflector
White Flange



HZW
Haze Reflector
White Flange



NN
Natural Metal Refl.
Natural Metal Flange



WW
White Reflector
White Flange

BAFFLE / FLANGE FINISHES



BW
Black Baffle
White Flange



BZBZ
Bronze Baffle
Bronze Flange



COCO
Copper Baffle
Copper Flange



NN
Natural Metal Baffle
Natural Metal Flange



WW
White Baffle
White Flange



7-YEAR LIMITED WARRANTY



LED PLATINUM SERIES 4", 5" AND 6" RECESSED DOWNLIGHT

High output Osram® LEDs and an outboard mounted driver provide cool operation and long life. Available in new construction and remodel, for commercial and residential applications. Air-tight, rated for use in insulated ceilings and exceed Title 24 high efficacy requirements with energy savings up to 75% when compared to 65W BR30.

LED

FEATURES

- Dimmable with economical 2-wire dimming down to 3%
- 3-1/2", 4-1/2" and 5-1/2" aperture sizes
- UL Listed for Wet Location
- Exceeds high efficacy requirements of California Title 24 - up to 51 lumens per watt
- 3000K or 4200K CCT, 86 CRI
- Light output is similar to a 65W BR30 with 75% energy savings over incandescent!
- Three-year limited warranty
- ASTM-283 Air-Tight
- Scientifically designed lens diffuses the LED image while providing high lumen output
- State of the art Osram® LEDs are rated at 50,000 hours at 70% lumen maintenance
- Does not emit forward heat, ultraviolet or infrared wavelengths
- High efficiency driver with a power factor >.90 with input power of 120V, 60Hz
- Available with Emergency Backup
- Available in 277V (not dimmable)
- Lighting Facts approved
- Trim is standard with a self-flanged die-cast ring



6" LED RECESSED

NHC-6LEDAT 14W LED
6" LED Platinum Series IC, Air-Tight
New Construction Housing
Dia: 6-3/8" Depth: 7-1/2"



NHRIC-6LEDAT 14W LED
6" LED Platinum Series
IC, Air-Tight Remodel Housing
Dia: 6-3/8" Depth: 7-1/2"



NTR-6LED30 3000K, 630 Lumens
NTR-6LED42 4200K, 710 Lumens
6" LED Trim - 5-1/2" Aperture
Finish: BW, PP, PW, WW



Available in 120V or 277V with Emergency Back-Up

LED PLATINUM SERIES

4", 5" AND 6" RECESSED DOWNLIGHT

5" LED RECESSED

NHIC-5LEDAT 14W LED
5" LED Platinum Series IC, Air-Tight
New Construction Housing
Dia: 5-5/8" Depth: 7-1/2"



LED

NHRIC-5LEDAT 14W LED
5" LED Platinum Series
IC, Air-Tight Remodel Housing
Dia: 5-5/8" Depth: 7-1/2"



NTR-5LED30 3000K, 622 Lumens
NTR-5LED42 4200K, 705 Lumens
5" LED Trim - 4-1/2" Aperture
Finish: BW, PP, PW, WW



4" LED RECESSED

NHIC-4LEDAT 11W LED
4" LED Platinum Series IC, Air-Tight
New Construction Housing
Dia: 4-1/4" Depth: 6-3/8"




NHRIC-4LEDAT 11W LED
4" LED Platinum Series
IC, Air-Tight Remodel Housing
Dia: 4-1/4" Depth: 6-3/8"



NTR-4LED30 3000K, 485 Lumens
NTR-4LED42 4200K, 560 Lumens
4" LED Trim - 3-1/2" Aperture
Finish: BW, PP, PW, WW



AVAILABLE FINISHES



Platinum Diffused Reflector
Platinum Diffused Flange



Black Reflector
White Flange



Platinum Diffused Reflector
White Flange



White Reflector
White Flange

Available in 120V or 277V with Emergency Back-Up

FLUORESCENT DIMMING OPTIONS

OPTIONAL DIMMING - A variety of dimming ballast options are available in 13W-42W. Each option requires a dimming controller that is compatible.

- D10** Universal Super Dim 0-10V / 4-wire, 120V-277V, (1) 13W-42W or (2) 13W-26W*
- M7** Advance Mark 7 0-10V / 4-wire, 120V-277V, (1) or (2) 13W-42W
- MX1** Advance Mark 10 120V / 2-wire, (1) or (2) 18W-42W
- MX2** Advance Mark 10 277V / 2-wire, (1) or (2) 18W-42W
- DAS** Advance AmbiStar 120V / 2-wire, (1) 26W-42W or (2) 26W*
- L51** Lutron Compact SE 5% 120V / 3-wire, (1) or (2) 18W-42W
- L52** Lutron Compact SE 5% 277V / 3-wire, (1) or (2) 18W-42W
- L11** Lutron Hi-Lume 1% 120V / 3-wire, (1) or (2) 18W-42W
- L12** Lutron Hi-Lume 1% 277V / 3-wire, (1) or (2) 18W-42W

* for (2) 32W-42W two ballast required

8" QUAD/TRIPLE TUBE HORIZONTAL ARCHITECTURAL & COMMERCIAL FRAME-INS

8" Quad/Triple Tube Horizontal CF Frame-Ins for one or two 13W, 18W, 26W, 32W or 42W lamps. Available in electronic ballast with Universal (120V-277V) input. Variety of dimming ballast options from 13W-42W. Please match appropriate fixture with compatible dimming control. Emergency backup available - see page 226. Accept high-grade Aluminum Low Iridescent Reflectors for CF Quad or Triple Tube light sources.



- NHP8U-113EL** (1) 13W
- NHP8U-213EL** (2) 13W
- NHP8U-118EL** (1) 18W
- NHP8U-218EL** (2) 18W
- NHP8U-12642EL** (1) 26-42W
- NHP8U-22642EL** (2) 26-42W

8" Quad/Triple Tube Architectural Horizontal CF Frame-In
Dia: 8" Depth: 6-1/2"



- NH8PU-113EL** (1) 13W
- NH8PU-213EL** (2) 13W
- NH8PU-118EL** (1) 18W
- NH8PU-218EL** (2) 18W
- NH8PU-12642EL** (1) 26-42W
- NH8PU-22642EL** (2) 26-42W

8" Quad/Triple Tube Commercial Horizontal CF Frame-In
Dia: 8" Depth: 6-1/2"



- NHRP8U-113EL** (1) 13W
- NHRP8U-213EL** (2) 13W
- NHRP8U-118EL** (1) 18W
- NHRP8U-218EL** (2) 18W
- NHRP8U-12642EL** (1) 26-42W
- NHRP8U-22642EL** (2) 26-42W

8" Quad/Triple Tube Architectural Remodel Horizontal CF Frame-In
Dia: 8" Depth: 6-1/2"

8" LOW IRIDESCENT REFLECTORS QUAD/TRIPLE TUBE HORIZONTAL

Alzak® Finishes: standard-Clear, Black (B), Bronze (BZ), Champagne Gold (CG), Gold (G), Haze (HZ), Pewter (PE), Straw (ST), Wheat (WH)

Flange Options: Self Flange (SF), White Flange (WF)



NTS-871LIWF
Alzak® Open Reflector
LIFS, LIWF



NTS-872BLIWF
Alzak® Open Reflector with
Black Baffle BLISF, BLIWF



NTS-872WLIWF
Alzak® Open Reflector with
White Baffle WLISF, WLIWF



NTS-874LISF
Alzak® Reflector Cross Louver
LIFS, LIWF



NTS-879LISFDC
Open Double Wall Wash
LIFS, LIWF



NTS-879LIWFSC
Open Single Wall Wash
LIFS, LIWF

CFL

8" REFLECTORS QUAD/TRIPLE TUBE HORIZONTAL

Flange Options: White Flange (WF)

Lamp: (1-2) 13W-26W Quad, (1-2) 13W-42W Triple



NTS-871G
Open Reflector
CLIWF, B, C, G, W



NTS-872GB
Reflector with Baffle
BC, BG, WC, WG



NTS-873C
Reflector Cross Louver
C, G



NTS-879SC
Open Single Wall Wash
C



NTS-879DC
Open Double Wall Wash
C



NTS-874G
Reflector Cross Louver
C, G



NTS-873C
Lensed Refl. Wall Wash
C, G



NTS-875L
Regressed Lens w/Reflector
G (Glass), L (Lexan),
FG (Frosted - Gold)



NTS-876CL
Flush Lens w/Reflector
CL (Clear), FL (Frosted)



NTS-877CBG
Regressed Lens w/ Baffle
and Reflector



NTS-878C
Reflector for Decorative Glass
Glass sold separately



NTG-8
8" glass for NTS-878C
See pg 71 for glass options

See page 10 for description of reflector finishes

6" TRIPLE TUBE CF HORIZONTAL ARCHITECTURAL & COMMERCIAL FRAME-INS

6" Triple Tube CF Frame-Ins for one 13W, 18W, 26W, 32W or 42W lamp. Available in electronic ballast with Universal (120V-277V) input, with a choice of dimming ballast from 18-42W (page 22). Emergency backup available - see page 226



NHPT6-13EL (1) 13W
NHPT6-18EL (1) 18W
NHPT6-2642EL (1) 26-42W
 6" Triple Tube Horizontal Architectural Frame-In
 Dia: 6-3/8" Depth: 5-1/2"

CFL



NHPT-13EL (1) 13W
NHPT-18EL (1) 18W
NHPT-2642EL (1) 26-42W
 6" Triple Tube Horizontal Commercial Frame-In
 Dia: 6-3/8" Depth: 5-1/2"



NHRPT6-13EL (1) 13W
NHRPT6-18EL (1) 18W
NHRPT6-2642EL (1) 26-42W
 6" Triple Tube Horizontal Architectural Remodel
 Dia: 6-3/8" Depth: 7-1/2"

6" QUAD CF HORIZONTAL ARCHITECTURAL & COMMERCIAL FRAME-INS

6" Horizontal CF Frame-Ins for one or two 13W, 18W or 26W lamps. Available in electronic ballast with Universal (120V-277V) input. Variety of dimming ballast options (page 22). Please match appropriate fixture with compatible dimming control. Emergency backup available - see page 226



NHP6-113EL (1) 13W
NHP6-213EL (2) 13W
NHP6-118EL (1) 18W
NHP6-218EL (2) 18W
NHP6-126EL (1) 26W
NHP6-226EL (2) 26W
 6" Quad CF Horiz. Architectural Frame-In Dia: 6-3/8" Depth: 5-1/2"



NHP-113EL (1) 13W
NHP-213EL (2) 13W
NHP-118EL (1) 18W
NHP-218EL (2) 18W
NHP-126EL (1) 26W
NHP-226EL (2) 26W
 6" Quad CF Horiz. Commercial Frame-In Dia: 6-3/8" Depth: 5-1/2"

6" QUAD CF HORIZONTAL cont. ARCHITECTURAL & COMMERCIAL FRAME-INS

NHPIC-113/EL (1) 13W
NHPIC-213/EL (2) 13W
NHPIC-118/EL (1) 18W
NHPIC-126/EL (1) 26W
NHPIC-218/EL (2) 18W
 6" Quad CF Horizontal Commercial
 IC Frame-In Dia: 6-3/8" Depth: 9-1/2"



NHRP6-113EL (1) 13W
NHRP6-213EL (2) 13W
NHRP6-118EL (1) 18W
NHRP6-218EL (2) 18W
NHRP6-126EL (1) 26W
NHRP6-226EL (2) 26W
 6" Quad CF Horizontal Architectural
 Remodel Dia: 6-3/8" Depth: 7-1/2"



CFL

6" QUAD/TRIPLE HORIZONTAL TRIMS ARCHITECTURAL & COMMERCIAL



CC

NTS-630B Quad
NTS-650B Triple Tube
 Reflector with Baffle
 B, W
 Also in Low Iridescent Alzak®



CC

NTS-631CLIWF Quad
NTS-651C Triple Tube
 Open Reflector
 CLIWF, CWF, B, C, G, W
 Also in Low Iridescent Alzak®



NTS-637C Quad
NTS-657C Triple Tube
 Reflector Cross Blade
 CLIWF, CWF, C
 Also in Low Iridescent Alzak®



CC

NTS-639SC Quad
NTS-659SC Triple Tube
 Open Single Wall Wash
 Also in Low Iridescent Alzak®



CC

NTS-639DC Quad
NTS-659DC Triple Tube
 Open Double Wall Wash
 Also in Low Iridescent Alzak®



CC

NTS-636G Quad
NTS-656G Triple Tube
 Wall Wash w/ Lensed Refl.
 C, G (Quad only)



CC

NTS-634B Quad
NTS-654B Triple Tube
 Wall wash w/ Baffle
 B, W



WET

CC

NTS-632W Quad
NTS-652W Triple Tube
 Regressed Albalite Lens w/ Baffle
 B, W



WET

CC

NTS-635 Quad
NTS-655 Triple Tube
 Regressed Drop Opal
 B, W



CC

NTS-662C Triple Tube
 Regressed Albalite Lens w/ Refl.
NTS-663C Triple Tube
 Regressed Fresnel Lens w/ Refl.



WET

CC

NTS-633FL Quad
NTS-653FL Triple Tube
 Flush Lens w/ Reflector
 CL-Clear, FL-Frost



NTS-638C Quad
NTS-658C Triple Tube
 Reflector for Decorative Glass
NTG-6 Glass sold separately
 See pg 71 for glass options

See page 10 for description of reflector finishes

8" QUAD/TRIPLE TUBE VERTICAL ARCHITECTURAL & COMMERCIAL FRAME-INS

8" & 6" Vertical CF Housings with electronic ballast for single CF 13W, 18W, 26W, 32W and 42W Quad/Triple Tube lamps. Electronic ballast has Universal (120V-277V) input. Variety of dimming ballast options from 13W-42W (page 22). Please match appropriate fixture with compatible dimming control. Emergency backup available - see page 226.

CFL



NHPV-813EL (1) 13W
NHPV-818EL (1) 18W
NHPV-82642EL (1) 26-42W
 8" Quad/Triple Tube CF Vertical Architectural Frame-In
 Dia: 8-1/4" Depth: 10-1/2"

NH8PV-13EL (1) 13W
NH8PV-18EL (1) 18W
NH8PV-2642EL (1) 26-42W
 8" Quad/Triple Tube CF Vertical Commercial Frame-In
 Dia: 8-1/4" Depth: 10-1/2"

NHRPV-813EL (1) 13W
NHRPV-818EL (1) 18W
NHRPV-82642EL (1) 26-42W
 8" Quad/Triple Tube CF Vertical Architectural Remodel
 Dia: 8-1/4" Depth: 9-3/4"

8" QUAD/TRIPLE VERTICAL TRIMS ARCHITECTURAL & COMMERCIAL



NTS-931C

Open Reflector
 CL1WF, B, C, G, W

Also in Low Iridescent Alzak®



NTS-932GB

Reflector w/ Baffle
 CB, CW, GB, GW

Also in Low Iridescent Alzak®



NTS-934C

Cross Louver
 CL1WF, C, G

Also in Low Iridescent Alzak®



NTS-939SC

Open Single Wall Wash

Also in Low Iridescent Alzak®



NTS-939DC

Open Double Wall Wash

Also in Low Iridescent Alzak®



NTS-933G

Wall Wash w/ Lensed Refl.
 C, G, W



NTS-936CL

Reflector w/ Flush Lens
 CL-Clear, FL-Frost



NTS-935G

Regressed Lens w/ Refl.
 G-Glass, L-Lexan, FG-Frost



NTS-938C

Reflector for Decorative Glass
NTG-8 Glass sold separately
 See pg 71 for glass options

6" QUAD/TRIPLE TUBE VERTICAL ARCHITECTURAL & COMMERCIAL FRAME-INS

NHPV-613EL (1) 13W
NHPV-618EL (1) 18W
NHPV-62642EL (1) 26-42W
 6" Quad/Triple Tube CF Vertical Architectural Frame-In
 Dia: 6-3/8" Depth: 10-1/2"



NHPV-13EL (1) 13W
NHPV-18EL (1) 18W
NHPV-2642EL (1) 26-42W
 6" Quad/Triple Tube CF Vertical Commercial Frame-In
 Dia: 6-3/8" Depth: 10-1/2"



NHRPV-613EL (1) 13W
NHRPV-618EL (1) 18W
NHRPV-62642EL (1) 26-42W
 6" Quad/Triple Tube CF Vertical Architectural Remodel
 Dia: 6-3/8" Depth: 9-3/4"



CFL

6" QUAD/TRIPLE VERTICAL TRIMS

ARCHITECTURAL & COMMERCIAL



NTS-731G **cc**

Open Reflector
 B, C, CLIWF, CWF, G, W
 Also in Low Iridescent Alzak®



NTS-730B **cc**

Reflector w/ Baffle
 B, W
 Also in Low Iridescent Alzak®



NTS-737G **cc**

Cross Louver
 C, CLIWF, CWF, G
 Also in Low Iridescent Alzak®



NTS-739SC **cc**

Open Single Wall Wash
 Also in Low Iridescent Alzak®



NTS-739DC **cc**

Open Double Wall Wash
 Also in Low Iridescent Alzak®



NTS-736C **cc**

Wall Wash w/ Lensed Refl.
 70W max C, G



NTS-734B **cc**

Wall wash w/ Baffle
 B, W



NTS-732B **cc**

Regress Albalite Lens w/ Baffle
 B, W



NTS-743W **cc**

Regress Fresnel Lens w/ Baffle
 W



NTS-735B **cc**

Regressed Drop Opal w/ Baffle
 B, W



NTS-733CL **cc**

Reflector w/ Flush Lens
 CL-Clear, FL-Frost



NTS-738C

Reflector for Decorative Glass
 NTG-6 Glass sold separately
 See pg 71 for glass options

See page 10 for description of reflector finishes

6" SHALLOW HORIZ. CF HOUSINGS ECONOMY & LIGHT COMMERCIAL

Nora Lighting's low profile housing for shallow plenum applications.
Optional dimming capability (pg 22) and emergency backup (pg 226).



NHPH-113SEL (1) 13W Quad/Twin
NHPH-118SEL (1) 18W Quad/Twin
NHPH-2642SEL (1) 26-42W Quad/Triple
NHPH-213SEL (2) 13W Quad/Twin
NHPH-218SEL (2) 18W Quad/Twin
NHPH-226SEL (2) 26W Quad/Twin
 6" Shallow Horizontal CF Housing
 Dia: 6-3/8" Depth: 4-3/8"

Shallow Plenum
Only 4-3/8" Deep!



NHRPH-113SEL (1) 13W Quad/Twin
NHRPH-118SEL (1) 18W Quad/Twin
NHRPH-2642SEL (1) 26-42W Quad/Triple
NHRPH-213SEL (2) 13W Quad/Twin
NHRPH-218SEL (2) 18W Quad/Twin
NHRPH-226SEL (2) 26W Quad/Twin
 6" Shallow Horizontal CF Remodel
 Dia: 6-3/8" Depth: 4-3/8"

CFL

6" SHALLOW CF TRIMS



NTM-40 (Black) **cc**
NTM-41 (White) **cc**

Stepped Baffle
also NTP-40 & NTP-41 Phenolic



NTM-41BZ **cc**
Stepped Baffle w/ Ring
BZ, C, CO, N



NTS-40 (G) **NTS-41** (C), HZ
NTS-42 (B) **NTS-43** (W)
Reflector



NTS-67C **cc**
Cross Louver
C, G



NT-45 (Black) **cc**
NT-46 (White) **cc**
Wall Wash w/ Baffle



NTS-35G **cc**
Reflector Wall Wash
B, C, G, W



NT-22 Metal
NP-22 Plastic (White)
Albalite Lens
(White), B, BZ, C, CO, G, N



NT-23 Metal
NP-23 Plastic (White)
Fresnel Lens
(White), B, BZ, C, CO, G, N



NT-24 Metal
NP-24 Plastic (White)
Drop Opal Lens
(White), B, BZ, C, CO, G, N



NTM-42 **cc**
Albalite Lens w/ Baffle
(Black), BZ, CO, N, W



NTM-43 **cc**
Fresnel Lens w/ Baffle
(Black), BZ, CO, N, W



NTM-46 **cc**
Drop Opal Lens w/ Baffle
M (Black Metal), BZ, CO, N, W

See page 10 for description of reflector finishes

6" ECONOMY SINGLE CF HOUSINGS

Nora Lighting's family of 6" Economy Vertical Compact Fluorescent housings offers affordable solutions for energy savings with optional dimming capability (pg 22) and emergency backup (pg 226).

NEW Convertible Socket converts from fixed to floating without tools.

**TITLE
24
2008**

CA TITLE 24 COMPLIANT

Meets the Title 24 requirement of the California Energy Code

NHPIC-2642ELAT (1) 26-42W

6" Electronic, High Wattage, Double Wall IC Housing, Airtight

Dia: 6-3/8" L: 14" W: 7-5/8" D: 7-3/8"



NHPIC-13ELAT (1) 13W

NHPIC-18ELAT (1) 18W

NHPIC-26ELAT (1) 26W

SH **NHPSIC-13ELAT** (1) 13W Shallow

SH **NHPSIC-18ELAT** (1) 18W Shallow

SH **NHPSIC-26ELAT** (1) 26W Shallow

6" Electronic IC CF Housing, Airtight

Dia: 6-3/8" Depth: 7-3/8" 5-1/2" Shallow



NHRPIC-13ELAT (1) 13W

NHRPIC-18ELAT (1) 18W

NHRPIC-26ELAT (1) 26W

SH **NHRPSIC-13ELAT** (1) 13W Shallow

SH **NHRPSIC-18ELAT** (1) 18W Shallow

SH **NHRPSIC-26ELAT** (1) 26W Shallow

6" Electronic IC CF Remodel, Airtight

Dia: 6-3/8" Depth: 7-3/8" 5-1/2" Shallow



NHP-13EL (1) 13W

NHP-18EL (1) 18W

NHP-2642EL (1) 26-42W

6" Electronic CF Housing

Dia: 6-3/8" Depth: 7-3/8"



NHRP-13EL (1) 13W

NHRP-18EL (1) 18W

NHRP-2642EL (1) 26-42W

6" Electronic CF Remodel

Dia: 6-3/8" Depth: 7-3/8"



RETROFIT KITS COMPACT FLUORESCENT

Easy and affordable solution to convert existing 6" incandescent housing to energy efficient compact fluorescent. Kits are available in 13W and 18W for IC and up to 26W for Non-IC Electronic Ballast, 120V. Kits may be hard wired.

NPK-13 Magnetic (1) 13W Twin Tube

NPK-13/2L Magnetic (2) 13W Twin Tube

NPK-13EL Electronic (1) 13W Quad/Triple Tube

NPK-18EL Electronic (1) 18W Quad/Triple Tube

NPK-26EL Electronic (1) 26W Quad/Triple Tube

6" Compact Fluorescent Retrofit Kits



**TITLE
24
2008**

Nora CFL Electronic Ballast Retrofits are UL Listed for hardwire application qualifying them for local energy company rebates.

6" ECONOMY SINGLE CF TRIMS



NTM-713W/PL **SH**
Airtight Cone Baffle
W/PL, B/PL



NTA-730B/PL **SH**
Airtight Cone Refl. w/ Baffle
B/PL, W/PL



NTA-102 (White) **CC**
NTA-101 (Black) **CC SH**
Cone Reflector w/ Baffle
also in BZ, CO, NN



NTS-714B **CC**
Airtight Cone Reflector
B, C, G, W



NTA-96 **CC**
Cone Reflector
(Gold)



NTA-97 **CC**
Cone Reflector
(Clear), CLI, AHZ, HZ

CFL



NTA-98 **CC**
Cone Reflector
(Black), BZBZ, COCO, NN



NTA-99 **CC**
Cone Reflector
(White)



NTS-6231CW **CC SH**
Cone Reflector w/ Metal Ring
B, BZ, C, CO, G, HZ, N, W



NT-45 (Black) **CC SH**
NT-46 (White) **CC SH**
Wall Wash w/ Baffle



NTA-103B **CC SH**
Cone Refl. Wall Wash w/ Baffle
B, BZ, CO, N, W



NTA-87 (Clear) **CC**
Cone Reflector Wall Wash
also in B, BZ, CO, G, N, W



NT-25 **SH**
Wall Wash
(White), B



NTS-6238W
Reflector for Decorative Glass
NTG-6 Glass sold separately
BZ, C, N, W



NTG-6
Decorative Glass for NTS-6238
See pg 71 for glass options



SH NT-22C Metal
(White), B, BZ, C, CO, G, N
SH NP-22 Plastic (White)
Albalite Lens



SH NT-23BZ Metal
(White), B, BZ, C, CO, G, N
SH NP-23 Plastic (White)
Fresnel Lens



SH NT-24 Metal
(White), B, BZ, C, CO, G, N
SH NP-24 NP-24PC Plastic
Drop Opal Lens



NTM-42 **CC**
Albalite Lens w/ Baffle
(Black), BZ, CO, N, W



NTM-43W **CC**
Fresnel Lens w/ Baffle
(Black), BZ, CO, N, W



NTM-46 **CC**
Drop Opal Lens w/ Baffle
M (Black Metal), BZ, CO, N, W

See page 10 for description of reflector finishes and Custom Combos **CC**

6" ECONOMY SINGLE CF TRIMS cont.

**NTS-6242W**

Cone Reflector Regressed
Albalite Lens w/ Baffle
B, BZ, C, CO, G, N, W

**NTS-6243B**

Cone Reflector Regressed
Fresnel Lens w/ Baffle
B, BZ, C, CO, G, N, W

**NTS-6244N**

Cone Reflector Regressed
Drop Opal Lens w/ Baffle
B, BZ, C, CO, G, N, W

**NTS-6245B**

Cone Reflector Regressed
Frosted Dome w/ Baffle
B, BZ, C, CO, G, N, W

**NTS-6246W**

Cone Reflector Regressed
Frosted Flat Lens w/ Baffle
B, BZ, C, CO, G, N, W

**NTS-6247W**

Cone Reflector Regressed
Center Frosted Lens w/ Baffle
B, BZ, C, CO, G, N, W

CFL

**NTS-6222BZ**

Albalite Lens w/ Reflector
(White), B, BZ, C, CO, G, N

**NTS-6223N**

Fresnel Lens w/ Reflector
(White), B, BZ, C, CO, G, N

**NTS-6224BZ**

Drop Opal Lens w/ Reflector
(White), B, BZ, C, CO, G, N

**NTS-6225**

Frosted Dome w/ Reflector
(White), B, BZ, C, CO, G, N

**NTS-6226**

Frosted Flat Lens w/ Reflector
(White), B, BZ, C, CO, G, N

See page 10 for description of reflector finishes and Custom Combos **CC**



6" ECONOMY DUAL CF HOUSINGS

All Dual CF Housings are available in 13W Magnetic or 13-26W Quad Tube. Optional dimming capability (pg 22) and emergency backup (pg 226).



CFL

NHPIC-13/2LEL Electronic (2) 13W Quad
NHPIC-13/2LQ Magnetic (2) 13W Quad/Twin
 6" Dual Lamp IC CF Housing
 Dia: 6-3/8" L: 13" W: 9-1/2" D: 7-1/2"

NHP-13/2LEL Electronic (2) 13W Quad
NHP-18/2LEL Electronic (2) 18W Quad
NHP-26/2LEL Electronic (2) 26W Quad
NHP-13/2LQ Magnetic (2) 13W Quad/Twin
 6" Dual Lamp CF Housing
 Dia: 6-3/8" Depth: 7-3/8"

NHRP-13/2LEL Electronic (2) 13W Quad
NHRP-18/2LEL Electronic (2) 18W Quad
NHRP-26/2LEL Electronic (2) 26W Quad
NHRP-13/2LQ Magnetic (2) 13W Quad/Twin
 6" Dual Lamp CF Remodel
 Dia: 6-3/8" Depth: 7-3/8"

6" ECONOMY SINGLE CF TRIMS



cc

NTA-96/2PL(G) **NTA-97/2PL(C)**
NTA-98/2PL(B) **NTA-99/2PL(W)**
 Cone Reflector



cc

NTS-30 (G), A
NTS-31 (C), HZ, AHZ
 Reflector



cc

NTS-32 (B), BZBZ, COCO, NN
NTS-33 (W)
 Reflector



cc

NTA-101/2PL (B)
NTA-102/2PL (W)
 Cone Reflector w/ Baffle



cc

NTA-103B/2PL
 Cone Refl. Wall Wash
 w/ Baffle B, W



cc

NTA-86/2PL(G) **NTA-87/2PL(C)**
NTA-88/2PL(B) **NTA-89/2PL(W)**
 Cone Reflector Wall Wash



WET

NTS-22CO/2PL w/ Reflector
NT-22 Metal **NP-22** Plastic
 Albalite Lens
 (White), B, BZ, C, CO, G, N



WET

NTS-23G/2PL w/ Reflector
NT-23 Metal **NP-23** Plastic
 Fresnel Lens
 (White), B, BZ, C, CO, G, N



WET

NTS-24N/2PL w/ Reflector
NT-24 Metal **NP-24** Plastic
 Drop Opal Lens
 (White), B, BZ, C, CO, G, N



WET

NTM-42 cc
 Albalite Lens w/ Baffle
 (Black), BZ, CO, N, W



WET

NTM-43W cc
 Fresnel Lens w/ Baffle
 (Black), BZ, CO, N, W



WET

NTM-46M cc
 Drop Opal Lens w/ Baffle
 M (Black Metal), BZ, CO, N, W

See page 10 for description of reflector finishes and Custom Combos cc

6" SLOPED CEILING CF HOUSINGS

Sloped ceiling housings create a clear path of unobstructed light from a maximum 6/12 pitch (22-1/2 degrees) ceiling to any floor or surface.

Optional dimming capability (pg 22) and emergency backup (pg 226).

NHPIC-926/32EAT (1) 26-32W Q/T

6" IC Slope Double Wall Housing

Dia: 6-1/2" x 7" Depth: 7-3/4"

NHPIC-926/13EAT (1) 13W Q/T

NHPIC-926/18EAT (1) 18W Q/T

NHPIC-926/26EAT (1) 26W Q/T

6" IC Sloped Ceiling Housing

Dia: 6-1/2" x 7" Depth: 7-3/8"

NHRPIC-92613EAT (1) 13W Q/T

NHRPIC-92618EAT (1) 18W Q/T

NHRPIC-92626EAT (1) 26W Q/T

6" IC Sloped Ceiling Remodel

Dia: 7-1/8" x 7-1/2" Depth: 7-3/8"

NHP-926/13EL (1) 13W Q/T

NHP-926/18EL (1) 18W Q/T

NHP-926/2642EL (1) 26-42W Q/T

6" Sloped Ceiling Non-IC Housing

Dia: 6-1/2" x 7" Depth: 7-3/8"

NHRP-926/13EL (1) 13W Q/T

NHRP-926/18EL (1) 18W Q/T

NHRP-926/2642EL (1) 26-42W Q/T

6" Sloped Ceiling Non-IC Remodel

Dia: 7-1/8" x 7-1/2" Depth: 7-3/8"



CFL

6" SLOPED CEILING CF TRIMS



NTM-615B

Sloped Baffle
B, W



NTP-614W

Sloped Phenolic Baffle
B, W



NTS-615G

Sloped Reflector
B, C, G, W



NT-22CO Metal

NP-22 Plastic (W)

Albalite Lens
B, BZ, C, CO, G, N, (W)



NT-23G Metal

NP-23 Plastic (W)

Fresnel Lens
B, BZ, C, CO, G, N, (W)



NT-24N Metal

NP-24 Plastic (W)

Drop Opal Lens
B, BZ, C, CO, G, N, (W)

5" ECONOMY CF HOUSINGS

All 5-inch housings are available with a 13W, 18W or 26W Electronic or 13W Magnetic Quad/Triple Tube, 120V or 277V ballast. **Optional dimming capability (pg 22) and emergency backup (pg 226).**

NEW Convertible Socket converts from fixed to floating without tools.



- NHPIC-513ELAT** (1) 13W Q/T 120V
- NHPIC-513ATE2** (1) 13W Q/T 120/277V
- NHPIC-518ELAT** (1) 18W Q/T 120V
- NHPIC-518ATE2** (1) 18W Q/T 120/277V
- NHPIC-526ELAT** (1) 26W Q/T 120V
- NHPIC-526ATE2** (1) 26W Q/T 120/277V
- NHPIC-501QAT13** Magnetic (1) 13W Q

5" IC Airtight CF Housing

Dia: 5-5/8" Depth: 7-1/2"

CFL



- NHRPIC-513ELAT** (1) 13W Q/T 120V
- NHRPIC-513ATE2** (1) 13W Q/T 120/277V
- NHRPIC-518ELAT** (1) 18W Q/T 120V
- NHRPIC-518ATE2** (1) 18W Q/T 120/277V
- NHRPIC-526ELAT** (1) 26W Q/T 120V
- NHRPIC-526ATE2** (1) 26W Q/T 120/277V
- NHRPIC-501QAT13** Magnetic (1) 13W Q

5" IC Airtight CF Remodel

Dia: 5-5/8" Depth: 7-1/2"



- NHP-501/13EL** (1) 13W Q/T 120/277V
- NHP-501/18EL** (1) 18W Q/T 120/277V
- NHP-501/13** Magnetic (1) 13W Q 120V

5" CF New Construction Housing

Dia: 5-5/8" Depth: 7-1/2"



- NHRP-504/13EL** (1) 13W Q/T 120/277V
- NHRP-504/18EL** (1) 18W Q/T 120/277V
- NHRP-504/13** Magnetic (1) 13W Q 120V

5" CF Remodel

Dia: 5-5/8" Depth: 7-1/2"

Title 24 compliant applies to electronic ballast, airtight units only.
Energy Star Rating applies to electronic ballast only.



5" ECONOMY CF TRIMS



NT-5001
Baffle Cone Splay
B, BZ, CO, N, W, WM



NTM-513
Airtight Cone Baffle
B, W, WM



NTS-5230 **cc**
Cone Reflector w/ Baffle
BZ, CO, N, W



NTS-5231 **cc**
Cone Reflector
B, BZ, C, CO, G, HZ, N, W



NTS-5238
Cone Reflector for Decorative Glass
NTG-5 Glass sold separately
BZ, C, N, W



NTG-5
Decorative Glass for **NTS-5238**
See pg 71 for glass options

CFL



NTS-5242
Refl. Albalite Lens w/ Baffle
B, BZ, C, CO, G, N, W



NTS-5243
Refl. Fresnel Lens w/ Baffle
B, BZ, C, CO, G, N, W



NTS-5244
Refl. Drop Opal w/ Baffle
B, BZ, C, CO, G, N, W



NTS-5245
Refl. Frosted Dome w/ Baffle
B, BZ, C, CO, G, N, W



NTS-5246
Refl. Frost Flat Lens w/ Baffle
B, BZ, C, CO, G, N, W



NTS-5247
Refl. Center Frost Lens w/ Baffle
B, BZ, C, CO, G, N, W



NTS-5222
Reflector Albalite Lens
B, BZ, C, CO, G, N, W



NTS-5223
Reflector Fresnel Lens
B, BZ, C, CO, G, N, W



NTS-5224
Reflector Drop Opal
B, BZ, C, CO, G, N, W



NTS-5225
Reflector Frosted Dome
B, BZ, C, CO, G, N, W



NTS-5226
Reflector Frost Flat Lens
B, BZ, C, CO, G, N, W



NT-5050
Reflector Dome
B, BZ, CO, N, W

See page 10 for description of reflector finishes

4" ECONOMY CF HOUSINGS & TRIMS

13W Magnetic or 13W Electronic Quad/Triple Tube, 120V or 277V ballast. Electronic configurations are Energy Star compliant **Optional dimming capability (pg 22) and emergency backup (pg 226).**



NS-406/EL Electronic (1) 13W Quad/Triple
NS-406Q Magnetic (1) 13W Quad/Triple
 4" Economy CF Housing
 Dia: 4-3/8" Depth: 5-1/2"



NSR-408/EL Electronic (1) 13W Quad/Triple
NSR-408Q Magnetic (1) 13W Quad/Triple
 4" Economy CF Remodel
 Dia: 4-3/4" Depth: 5-1/2"

CFL

NS-40 (White), BZ, CO, N
NS-41 (Black)
 Stepped Baffle
 Ring: B, BZ, C, CO, G, N, W

NS-42 (G) **NS-43** (B)
NS-44 (C), HZ **NS-46** (W)
NS-52 (N) **NS-53** (CO), BZ
 Reflector

NS-38 (Clear Refl.)
 Reflector for Decorative Glass
NTG-4 Glass sold separately
 BZ, C, N, W



NS-50
 Wall Wash
 (White)



NS-22 Albalite
NS-23 Fresnel
 B, BZ, C, CO, G, N, W



NS-24
 Drop Opal
 B, BZ, C, CO, G, N, W

Additional Trims: NL-495/PL, NL-496/PL, NL-497/PL

4" IC AT HIGH PERFORMANCE CF HOUSINGS

Available with a 13W, 18W or 26W Electronic Quad/Triple Tube, 120V or 277V ballast. Electronic air-tight configurations meet the strict CA Title 24 Energy Code requirements and are Energy Star compliant. **Optional dimming capability (pg 22) and emergency backup (pg 226).**



NHPIC-413ELAT (1) 13W Q/T 120V
NHPIC-413ATE2 (1) 13W Q/T 120/277V
NHPIC-418ELAT (1) 18W Q/T 120V
NHPIC-418ATE2 (1) 18W Q/T 120/277V
NHPIC-426ELAT (1) 26W Q/T 120V
NHPIC-426ATE2 (1) 26W Q/T 120/277V

4" IC Airtight CF Housing
 Dia: 4-1/4" Depth: 6-3/8" 18W max on lensed trims



NHRPIC-413ELAT (1) 13W Q/T 120V
NHRPIC-413ATE2 (1) 13W Q/T 120/277V
NHRPIC-418ELAT (1) 18W Q/T 120V
NHRPIC-418ATE2 (1) 18W Q/T 120/277V
NHRPIC-426ELAT (1) 26W Q/T 120V
NHRPIC-426ATE2 (1) 26W Q/T 120/277V

4" IC Airtight CF Remodel
 Dia: 5-5/8" Depth: 7-1/2" 18W max on lensed trims

4" IC AT HIGH PERFORMANCE TRIMS



NTS-4930

Square Cone Reflector w/ Baffle
BB, BZBZ, BW, COCO, NN, WW



NTS-4931

Square Cone Reflector
BW, CW, GW, WW



NTS-4955

Square Reflector Wall Wash
CW



WET

NTS-4922 18W MAX

Square Albalite w/ Reflector
B, BZ, C, CO, G, N, W



WET

NTS-4923 18W MAX

Square Fresnel w/ Reflector
B, BZ, C, CO, G, N, W



WET

NTS-4924 18W MAX

Square Drop Opal w/ Reflector
B, BZ, C, CO, G, N, W



WET

NTS-4925 18W MAX

Square Frost Dome w/ Reflector
B, BZ, C, CO, G, N, W



WET

NTS-4926 18W MAX

Square Frost Flat Lens w/ Refl.
B, BZ, C, CO, G, N, W



WET

NTS-4927 18W MAX

Sq. Frost Center Lens w/ Refl.
B, BZ, C, CO, G, N, W

CFL



NTS-4230 cc

Cone Reflector w/ Baffle
B, BZ, CO, N, W



NTS-4231 cc

Cone Reflector
B, C, G, HZ, W



NS-52 (Nat. Metal) cc

NS-53 (Copper), BZ cc
Reflector



NTS-4255 cc

Cone Reflector Wall Wash
CW



NTS-4238 (Clear Refl.)

Cone Reflector for Decorative Glass
NTG-4 Glass sold separately
BZ, C, N, W



WET

18W MAX

NTS-4224

Cone Reflector Drop Opal
B, BZ, C, CO, G, N, W



WET

18W MAX

NTS-4222 Albalite

NTS-4223 Fresnel

Cone Reflector Lens
B, BZ, C, CO, G, N, W



WET

18W MAX

NTS-4225

Cone Reflector Frosted Dome
B, BZ, C, CO, G, N, W



WET

18W MAX

NTS-4226 Frost

NTS-4227 Center Frost

Cone Reflector Frost Flat Lens
B, BZ, C, CO, G, N, W



NL-495/PL

Metropolitan Glass Moon
B, F, P



NL-496/PL

Metropolitan Glass Stepped
B, F, P



NL-497/PL

Metropolitan Glass Ice
B, F, P

See page 10 for description of reflector finishes and Custom Combos **cc**

GU24 CFL HOUSINGS & TRIMS

Available in 6", 5" and 4" apertures, airtight and rated for insulated ceilings, Nora's GU24 products lower the cost of dedicated energy efficient lighting. Using self-ballasted lamps available in wattages from 13 to 26 watts, the proper wattage can be selected at the time of final installation.

FEATURES

- Saves up to 75% in energy costs over incandescent
- GU24 lamps rated up to 10,000 hours
- Variable wattage from 13W up to 26W can be selected at time of installation
- Self-ballasted lamps allow for easy, one-unit replacements
- Convertible socket converts fixed to floating without tools on 5" & 6" housings
- Substantial material savings - a complete Nora GU24 package can save over 50% versus a comparable dedicated 4-pin remote mount ballasted fixture
- Energy Star rated - 6" new construction and remodel
- Title 24 compliant when used with Nora and others LED Retrofit module
- cUL listed for dry location
- Housing rated for insulated ceiling applications and is air-tight



Spiral GU24 CFL
13W, 18W, 23W, 26W



R30 GU24 CFL
15W

CFL

6" GU24 BASED CFL



NHIC-6G24ATFL (1) 13-26W GU24
6" IC Airtight GU24 Base CF Housing
Dia: 6-3/8" Depth: 7-1/2"

Title 24 Compliant when used with Nora LED Retrofit



NHRIC-6G24ATFL (1) 13-26W GU24
6" IC Airtight GU24 Base CF Remodel
Dia: 6-3/8" Depth: 7-1/2"

Title 24 Compliant when used with Nora LED Retrofit



NTM-713W/PL
Airtight Cone Baffle
W/PL, B/PL



NTA-730B/PL
Airtight Cone Refl. w/ Baffle
B/PL, W/PL






NTS-6230
Cone Reflector w/ Baffle
B, BZ, C, CO, G, HZ, N, W

See page 10 for description of reflector finishes and Custom Combos




GU24 CFL HOUSINGS & TRIMS

5" GU24 BASED CFL

NHIC-5G24ATFL (1) 13-26W GU24
5" IC Airtight GU24 Base CF Housing
Dia: 5-5/8" Depth: 7-1/2"

   Title 24 Compliant when used with Nora LED Retrofit

NHRIC-5G24ATFL (1) 13-26W GU24
5" IC Airtight GU24 Base CF Remodel
Dia: 5-5/8" Depth: 7-1/2"

   Title 24 Compliant when used with Nora LED Retrofit



CFL



NT-5001
Baffle Splay
B, BZ, CO, N, W, MW



NT-5000
Splay w/ Bracket
BZ, CO, N, W



NTM-513
Airtight Cone Baffle
B, W, MW



NT-5012
Phenolic Baffle w/ Bracket
B, BZ, CO, N, W



NTS-5230
Cone Reflector w/ Baffle
BZ, CO, N, W



NT-5014
Airtight Cone Reflector
B, BZ, C, CO, G, N, W



NTS-5231
Cone Reflector
B, BZ, C, CO, G, HZ, N, W



NT-5021
Cone Reflector w/ Bracket
B, BZ, C, CO, G, N, W



NT-5020
Reflector w/ Bracket
B, C, G, W

4" GU24 BASED CFL

NHIC-4G24AT (1) 13-26W GU24
4" IC Airtight GU24 Base CF Housing
Dia: 4-1/4" Depth: 6-3/8"


NHRIC-4G24AT (1) 13-26W GU24
4" IC Airtight GU24 Base CF Remodel
Dia: 4-1/4" Depth: 6-3/8"



NTS-4230 
Cone Reflector w/ Baffle
B, BZ, CO, N, W



NTS-4231 
Cone Reflector w/ Baffle
B, C, G, HZ, W



NS-42 (G) NS-43 (B)
NS-44 (C), HZ NS-46 (W)
NS-52 (N) NS-53 (CO), BZ
Reflector

8" HID METAL HALIDE FRAME-INS ARCHITECTURAL & COMMERCIAL

8" HID Architectural and Commercial Frame-ins and Cone Reflectors for 39W-150W Metal Halide sources. Electronic ballast with universal 120V-277V input. **Quartz restrike is available with the 39W, 70W and 100W housings. Add QS to the end of the catalog number.**



- NHFM8-935/EL** 39W PAR20 / PAR30
- NHFM8-950/EL** 50W ED17
- NHFM8-970/EL** 70W ED17 / PAR30 / PAR38
- NHFM8-9100/EL** 100W ED17 / PAR38
- 24 NHFM8-9150/EL** 150W ED17 / PAR38

8" Architectural HID Frame-In
Dia: 8-1/4" Depth: 10-1/2"



- NHFM-935/EL** 39W PAR20 / PAR30
- NHFM-950/EL** 50W ED17
- NHFM-970/EL** 70W ED17 / PAR30 / PAR38
- NHFM-9100/EL** 100W ED17 / PAR38
- 24 NHFM-9150/EL** 150W ED17 / PAR38

8" Commercial HID Frame-In
Dia: 8-1/4" Depth: 10-1/2"



- NHRFM8-935/EL** 39W PAR20 / PAR30
- NHRFM8-950/EL** 50W ED17
- NHRFM8-970/EL** 70W ED17 / PAR30 / PAR38
- NHRFM8-9100/EL** 100W ED17 / PAR38
- 24 NHRFM8-9150/EL** 150W ED17 / PAR38

8" Architectural HID Remodel
Dia: 8-3/8" Depth: 9-3/4"

HID

8" HID METAL HALIDE TRIMS ARCHITECTURAL & COMMERCIAL



NTS-931C
Open Reflector
B, C, G, W



NTS-932GB
Reflector w/ Baffle
CB, CW, GB, GW



NTS-934C
Cross Louver
C, G 100W max



NTS-939SC
Open Single Wall Wash



NTS-939DC
Open Double Wall Wash



NTS-933G
Wall Wash w/ Lensed Refl.
C, G, W 100W max



NTS-936CL
Reflector w/ Flush Lens
CL-Clear, FL-Frost
100W max



NTS-935G
Regressed Lens w/ Refl.
G-Glass, L-Lexan, FG-Frost
100W max



NTS-938C 100W max
Reflector for Decorative Glass
NTG-8 Glass sold separately
See pg 71 for glass options

See page 10 for description of reflector finishes and Custom Combos **CC**

6" HID METAL HALIDE FRAME-INS ARCHITECTURAL & COMMERCIAL

6" HID Architectural and Commercial Frame-ins and Cone Reflectors for 39W-100W Metal Halide sources. Electronic ballast with universal 120V-277V input. **Quartz restrike is available with the 39W, 70W and 100W housings. Add QS to the end of the catalog number.**

NHFM6-735/EL 39W PAR20 / PAR30
NHFM6-750/EL 50W ED17
NHFM6-770/EL 70W ED17 / PAR30 / PAR38
NHFM6-7100/EL 100W ED17 / PAR38

6" Architectural HID Frame-In

Dia: 6-3/8" Depth: 10-1/2"

NHFM-735/EL 39W PAR20 / PAR30
NHFM-750/EL 50W ED17
NHFM-770/EL 70W ED17 / PAR30 / PAR38
NHFM-7100/EL 100W ED17 / PAR38

6" Commercial HID Frame-In

Dia: 6-3/8" Depth: 10-1/2"

NHRFM6-735/EL 39W PAR20 / PAR30
NHRFM6-750/EL 50W ED17
NHRFM6-770/EL 70W ED17 / PAR30 / PAR38
NHRFM6-7100/EL 100W ED17 / PAR38

6" Architectural HID Remodel

Dia: 6-3/8" Depth: 9-3/4"



6" HID METAL HALIDE TRIMS ARCHITECTURAL & COMMERCIAL

HID



NTS-731G **cc**

Open Reflector
B, C, CWF, G, W



NTS-730B **cc**

Reflector w/ Baffle
B, W



NTS-737G **cc**

Cross Louver
C, CWF, G



NTS-739SC **cc**

Open Single Wall Wash



NTS-739DC **cc**

Open Double Wall Wash



NTS-736C **cc**

Wall Wash w/ Lensed Refl.
70W max C, G



NTS-734B **cc**

Wall wash w/ Baffle
B, W 70W max



NTS-732B **cc**

Regress Albalite Lens w/ Baffle
B, W 70W max



NTS-743W **cc**

Regress Fresnel Lens w/ Baffle
W 70W max



NTS-735B **cc**

Regressed Drop Opal w/ Baffle
B, W
70W max



NTS-733CL **cc**

Reflector w/ Flush Lens
CL-Clear, FL-Frost
70W max



NTS-738C

Reflector for Decorative Glass
NTG-6 Glass sold separately
See pg 71 for glass options

4" HID METAL HALIDE FRAME-INS ELECTRONIC ARCHITECTURAL

Our 4" aperture CMH downlight is one of the most compact fixtures in the market at only 6-3/8" deep. Designed for use with T4, T6, PAR20 or GX10 ceramic metal halide sources. Available with adjustable beam spread reflectors for all your applications.



NHID-420

20W MR16GX10 / PAR20 / T4

NHID-439

39W MR16GX10 / PAR20 / T4 / T6

NHID-470

70W T4 / T6

4" Architectural HID Housing

Dia: 4-1/2" Depth: 6-3/8"

4" HID METAL HALIDE DIE-CAST TRIMS



NHID-4T415W 15° Beam spread

NHID-4T423W 23° Beam spread

NHID-4T432W 32° Beam spread

Clear Reflector w/ White Ring

70W T4 CMH max.



NHID-4T615W 15° Beam spread

Faceted Reflector w/ White Ring

70W T6 CMH max.



NHID-4GX10W

White Adjustable Elbow

39W MR16 GX10 CMH max.



NHID-4P20W

Black Stepped Baffle w/ White Ring

39W PAR20 CMH max.



HID

6" ECONOMY HID HOUSINGS

6" Economy Standard and Remodel Housings for 39-100W Metal Halide light sources. Available in Electronic Ballast with universal input (120V-277V). **Quartz restrike is available with the 39W, 70W and 100W housings. Add QS to the end of the catalog number.**

NHPM-735/EL 39W PAR20 / PAR30

NHPM-750/EL 50W ED17

NHPM-770/EL 70W ED17 / PAR30 / PAR38

NHPM-7100/EL 100W ED17 / PAR38

6" Economy HID Housing

Dia: 6-3/8" Depth: 7-1/2"



NHRPM-735/EL 39W PAR20 / PAR30

NHRPM-750/EL 50W ED17

NHRPM-770/EL 70W ED17 / PAR30 / PAR38

NHRPM-7100/EL 100W ED17 / PAR38

6" Economy HID Remodel

Dia: 6-3/8" Depth: 7-1/2"



6" ECONOMY HID TRIMS



CC

NTA-102 (White)

NTA-101 (Black), BZ, CO, N
Cone Reflector w/ Baffle
also in BZ, CO, NN



CC

NTA-96 (G) **NTA-99** (W)

NTA-97 (C), HZ, AHZ
NTA-98 (B), BZ, CO, N
Cone Reflector



CC

NTS-30 (G) **NTS-33** (W)

NTS-31 (C), HZ, AHZ
NTS-32 (B), BZ, CO, N
Reflector

HID



CC

NTM-52 PAR30

NTM-53 PAR38

Open Gimbal
B, BZ, C, CO, G, N, W



CC

NTM-54 PAR30

NTM-55 PAR38

Baffle w/ Adjustable Gimbal
B, BZ, CO, N, W



CC

NTM-56 PAR30

NTM-57 PAR38

Reflector w/ Adjustable Gimbal
B, C, G, W



NTA-103

Cone Refl. Baffle Wall Wash
B, BZ, CO, N, W



NTA-86 (G) **NTA-87** (B)

NTA-88 (B), BZ, CO, N
NTA-89 (W)

Cone Refl. Baffle Wall Wash



NTA-638

Reflector for Decorative Glass
NTG-6 Glass sold separately
BZ, C, N, W



WET

NT-22

NTS-22 w/ Reflector
Albalite Lens 70W max
B, BZ, C, CO, G, N, (White)



WET

NT-23

NTS-23 w/ Reflector
Fresnel Lens 70W max
B, BZ, C, CO, G, N, (White)



WET

NT-24

NTS-24 w/ Reflector
Albalite Lens 70W max
B, BZ, C, CO, G, N, (White)



WET

NTS-25 Frosted Dome

NTS-26 Frosted Flat
Lens w/ Reflector
B, BZ, CO, N, W 70W max



WET

NTM-42 Albalite

NTM-43 Fresnel
Reg. Lens w/ Baffle 70W max
(Black), BZ, CO, N, W



WET

NTM-46

Regress Drop Opal w/ Baffle
(Black), BZ, CO, N, W
70W max

6" LOW VOLTAGE HOUSINGS

Nora Lighting's 6" low voltage housings provide crisp, defined halogen illumination from MR16, AR111 or PAR36 light sources for any application. Available with electronic or magnetic transformer, 120V and 277V. Quick connects provided.



NLIC-601/1EL 50W 120V Electronic
NLIC-601/2EL 50W 277V Electronic
NLIC-601QAT 50W 120V Magnetic

6" IC Airtight Low Voltage Housing

Dia: 6-3/8" Depth: 7-3/4"



NL-601/1EL 50W 120V Electronic
NL-601/2EL 50W 277V Electronic
NL-601/75/1EL 75W 120V Electronic
NL-601/75/2EL 75W 277V Electronic
NL-601Q 50W 120V Magnetic
NL-601Q/277V 50W 277V Magnetic
NL-601/75Q 75W 120V Magnetic
NL-601/277/75Q 75W 277V Magnetic

6" Low Voltage Housing

Dia: 6-3/8" Depth: 7-1/2"



NLR-604/1EL 50W 120V Electronic
NLR-604/2EL 50W 277V Electronic
NLR-604/75/1EL 75W 120V Electronic
NLR-604/75/2EL 75W 277V Electronic
NLR-604Q 50W 120V Magnetic
NLR-604/277Q 50W 277V Magnetic
NLR-604/75Q 75W 120V Magnetic
NLR-604/277/75Q 75W 277V Magnetic

6" Low Voltage Remodel

Dia: 6-3/8" Depth: 7-1/2"

LOW
Voltage

RETROFIT KITS

Nora's Low Voltage Retrofit Kit allows existing 6" line voltage housings to be converted to 6" low voltage. Both transformer kit and trim are required, ordered separately. Ideal for instantly changing general lighting to halogen spot and accent effects. **FOR NON-IC APPLICATIONS ONLY.**

LOW VOLTAGE

NLK-2600 Non-IC with magnetic transformer for max 50W MR16 lamp

NLK-2600/EL Non-IC with electronic transformer for max 50W MR16 lamp

NLK-2636 Non-IC with magnetic transformer for PAR36/AR111 lamp
 • Uses 6" Low Voltage MR16 Trims

LINE VOLTAGE GU10 MR16

NRA-34/10 without lamp

NRA-37/10 with lamp



Use as an economical solution to convert a medium base Non-IC housing into a GU10 MR16.

- No Transformer
- Easy Dimming
- Uses 6" Low Voltage MR16 Trims

LINE
Voltage

6" LOW VOLTAGE TRIMS



NL-610 (White) MR16
NL-611 (Black) MR16
Adjustable Baffle 35°



NL-641 MR16
Designer Baffle
(Black), W 35°



NL-675 MR16
Regressed Stepped Baffle
B, W 35°



NL-612 (G) **NL-613** (B)
NL-614 (C) **NL-616** (W)
MR16 Cone Reflector 35°



NL-613 MR16
Cone Reflector 35°
(B), BZ, CO



NL-642 (G) **NL-643** (B)
NL-644 (C) **NL-646** (W)
MR16 Designer Reflector 35°



NL-671 PAR36/AR111
Surface Gimbal
B, BZ, C, CO, G, N, W 35°



NL-672 PAR36/AR111
Regressed Gimbal w/ Baffle
B, N, W 35°



NL-673 PAR36/AR111
Regressed Gimbal w/ Reflector
B, C, G, W 35°



NL-628 MR16
Regressed Eyeball w/ Baffle
B, W 35°



NL-670 MR16
Reg. Spot Cylinder w/ Baffle
B, BZ, CO, N, W 35°



NL-618 B, BB, W
NL-619 C, G
MR16 Eyeball w/ Baffle 35°



NL-663 MR16
Gimbal w/ Baffle 45°
B, BZ, C, CO, G, N, W, WW



NL-665 MR16
Surface Round Spot 45°
B, BZ, C, CO, G, N, W



NL-680* MR16
Adjustable Elbow 90°/358°
B, BZ, C, CO, G, N, W



NL-648 (Black) MR16
NL-649 (White) MR16
Wall Wash w/ Baffle 35°



NL-650 MR16
Wall Wash w/ Baffle 35°
(White)



NL-645 MR16
Slot Aperture 35°
B, BZ, CO, N, (White)



NL-620 MR16
2" Pinhole w/ Baffle
B, W



NL-640 MR16
1-3/4" Pinhole
(White) 35°



NL-690 MR16
Adj. Drop Gimbal
B, W 90°



NL-695P MR16
Metropolitan Moon Glass
B, F, P



NL-696W MR16
Metropolitan Stepped Glass
B, F, P



NL-697B MR16
Metropolitan Ice Light Glass
B, F, P

* Not for use with GU10 MR16 lamps
See page 10 for description of reflector finishes

LOW
Voltage

LINE
Voltage

4" RECESSED FRAMING PROJECTOR

Nora Lighting's history of innovation carries over into recessed projection lighting through a recessed framing and gobo projector that fits into a standard 4" low voltage housing.



NL-471W*

Recessed Framing Projector
Patented



* Complete model specify trim/housing: NL-471W/NLR-404/RFP

FEATURES

- Produces precise, clean rectangle of illumination around artwork
- Includes gobo holder
- Four adjustable and locking independent framing shutters
- Two optical grade glass focusing lenses
- Energy Efficient
- Low 1-3/8" profile below ceiling
- Consult Nora for gobos or color filters
- Includes choice of one housing
NL-401/RFP: New Construction
NLIC-401SAT/RFP: IC Environs
NLR-404/RFP: Remodel
- Lamp: 35W MR11 FTH (not included)

HOUSING OPTIONS: included with NL-471W

NL-401/RFP 120V Magnetic

NL-401/277/RFP 277V Magnetic

NL-401/1ELRFP 120V Electronic

NL-401/2EL/RFP 277V Electronic

12V New Const. 35W MR11 Housing for NL-471W
Dia: 4-3/8" Depth: 5-5/8"

NLR-404/RFP 120V Magnetic

NLR-404/277/RFP 277V Magnetic

NLR-404/1ELRFP 120V Electronic

NLR-404/2EL/RFP 277V Electronic

12V Remodel 35W MR11 Housing for NL-471W
Dia: 4-3/8" Depth: 5-3/4"

NLIC-401SAT/RFP 120V Magnetic

NLIC-401SAT/277/RFP 277V Magnetic

NLIC-401SAT/1ELRFP 120V Electronic

NLIC-401SAT/2EL/RFP 277V Electronic

12V IC Airtight 35W MR11 Housing for NL-471W
Dia: 4-3/8" Depth: 7-1/4" Length: 12" Width: 7-3/4"

ACCESSORIES:

Custom Gobos (Consult Factory)

Dichroic Color Filters (Consult Factory)

LOW
Voltage



4" LOW VOLTAGE HOUSINGS

Nora Lighting's 6" low voltage housings provide crisp, defined MR16 halogen illumination for any application. Available with electronic or magnetic transformer, 120V and 277V. Quick connects provided.

- **NLIC-401AT/1EL*** 50W 120V Electronic
- **NLIC-401AT/2EL*** 50W 277V Electronic
- **NLIC-401QSAT/20** 20W 120V Magnetic
- **NLIC-401QSAT/37** 37W 120V Magnetic
- **NLIC-401QSAT** 50W 120V Magnetic
- **NLIC-401AT/277V** 50W 277V Magnetic
- **NLIC-402AT/1EL*** SHALLOW 50W 120V Electronic
- **NLIC-402QSAT/20** SHALLOW 20W 120V Magnetic
- **NLIC-402QSAT/37** SHALLOW 37W 120V Magnetic
- **NLIC-402QSAT** SHALLOW 50W 120V Magnetic

4" IC Airtight Low Voltage Housing

Dia: 4-3/8" Depth: 7-1/4" (120V) 7-1/2" (277V)
SHALLOW: Dia: 4-3/8" Depth: 5-3/8" (120V)



SH

Shallow units only

- **NL-401AT/1EL*** 50W 120V Electronic
- **NL-401AT/2EL*** 50W 277V Electronic
- **NL-401/75/1EL** 75W 120V Electronic
- **NL-401/75/2EL** 75W 277V Electronic
- **NL-401QAT/20** 20W 120V Magnetic
- **NL-401QAT/37** 37W 120V Magnetic
- **NL-401QAT** 50W 120V Magnetic
- **NL-401QAT/FX**** 50W 120V Mag., Fire Rated
- **NL-401/50/277V** 50W 277V Magnetic
- **NL-401/75** 75W 120V Magnetic
- **NL-401/75/277V** 75W 277V Magnetic

4" Low Voltage Housing

Dia: 4-3/8" Depth: 5-1/2" (50W) 6-3/8" (75V)

** See page 70 for dimensions of fire box



*Available in wattage reduced
20W (/20) and 37W (/37)

- **NLR-404AT/1EL*** 50W 120V Electronic
- **NLR-404AT/2EL*** 50W 277V Electronic
- **NLR-404/75/1EL** 75W 120V Electronic
- **NLR-404/75/2EL** 75W 277V Electronic
- **NLR-404QAT/20** 20W 120V Magnetic
- **NLR-404QAT/37** 37W 120V Magnetic
- **NLR-404QAT** 50W 120V Magnetic
- **NLR-404/50/277V** 50W 277V Magnetic
- **NLR-404/75** 75W 120V Magnetic
- **NLR-404/75/277V** 75W 277V Magnetic

4" Low Voltage Remodel

Dia: 4-3/8" Depth: 5-5/8" (50W) 6-3/8" (75V)

LOW
Voltage

- **NL-402S/1EL*** 50W 120V Electronic
- **NL-402S/20** 20W 120V Magnetic
- **NL-402S/37** 37W 120V Magnetic
- **NL-402S** 50W 120V Magnetic

4" Shallow Low Voltage Housing

Dia: 4-3/8" Depth: 3-1/2"



- **NLR-403S/1EL*** 50W 120V Electronic
- **NLR-403S/20** 20W 120V Magnetic
- **NLR-403S/37** 37W 120V Magnetic
- **NLR-403S** 50W 120V Magnetic

4" Shallow Low Voltage Remodel

Dia: 4-1/4" Depth: 3-1/2"



- **NLR-405AT/20** 20W
- **NLR-405AT/37** 37W
- **NLR-405AT** 50W

4" Remodel for Remote Transformer

Class 2 Transformer required, ordered separately. See pg 212

Dia: 4-1/4" Depth: 4-1/4"



4" LOW VOLTAGE TRIMS

NEW! NEW Square Trims designed for easy alignment and aiming.



NL-4810 CC SH

Square w/ Baffle 35°
BB, BBZ, BCO,
WC, WG, WN, WW



NL-4814 CC SH

Square w/ Reflector 35°
BW, BZBZ, CB, CC, CG,
COCO, CW, GW, HZW, NN



NL-4840 SH

Square w/ 1" Pinhole 35°
B, BZ, C, CO, G, N, W



NL-4863 CC SH

Square w/ Baffled Gimbal 35°
BB, BC, BG, BW, BZBZ,
COCO, NN, WW



NL-4865 CC SH

Square w/ Surface Adj. 35°
B, BZ, C, CO, G, N, W



NL-4870 CC SH

Square w/ Adj. Elbow 90°/358°
B, BZ, C, CO, G, N, W



NL-4825 SH

Square w/ Frosted Dome
B, BZ, C, CO, G, N, W



NL-4826 SH

Square w/ Flat Frost Lens
B, BZ, C, CO, G, N, W



NL-4827 SH

Square w/ Flat Frost -
Clear Center Lens
B, BZ, C, CO, G, N, W



NL-410 CC SH

Adjustable Baffle 35°
(White), BZ, CO, N, P



NL-411 CC SH

Black Adjustable Baffle 35°
(Black)



NL-468 CC

Adjustable Baffle 45°
B, W



CC SH

NL-412 (Gold)

NL-413 (Black)
Adjustable Reflector 35°



CC SH

NL-414 (Clear), HZ

NL-416 (White)
Adjustable Reflector 35°



CC SH

NL-452 (N)

NL-453 (CO), BZ
Adjustable Reflector 35°



NL-469 CC

Adjustable Reflector 45°
B, BZ, C, CO, G, HZ, N, W



NL-417 CC SH

Cross Louver w/ Reflector
CW, GW



NL-441 SH

Louver w/ Reflector
B, BZ, C, CO, G, N, W



NL-449 (White) CC SH

NL-448 (BW), BZ, CO, N
Adj. Wall Wash w/ Baffle 35°



NL-450 CC SH

Adj. Wall Wash w/ Reflector
(White) 35°



NL-490 SH

Adj. Drop Gimbal
B, W 35°

See page 10 for description of reflector finishes and Custom Combos CC

4" LOW VOLTAGE TRIMS cont.



NL-445 CC SH
Adjustable Slot Aperture 35°
(White), B, BZ, CO, N



NL-420 (White) SH
NL-421 (Black) SH
2" Pinhole w/ Baffle



NL-440 SH
1" Pinhole 35°
(White), B, BZ, C, CO, G, N



NL-418 CC SH
BB, BZ, CO, N, WB, WW



NL-463 CC SH
Gimbal w/ Baffle 35°
BB, BC, BG, BN, BW, BZ,
CO, WB, WC, WG, WW



NL-465 CC SH
Surface Adjustable 35°
B, BZ, C, CO, G, N, W

NL-419 C, G CC SH
Adj. Eyeball w/ Baffle 35°



NL-467 CC SH
Surface Adj. w/ Baffle 35°
BC, BG, BN, BW, WW



NL-491 CC SH
Adjustable Spot 30°
B, N, W



NL-470 CC SH
Adjustable Elbow 90°/358°
B, BZ, C, CO, G, N, W



NL-422 SH
Albalite Lens
B, BZ, C, CO, G, N, W



NL-423 SH
Fresnel Lens
B, BZ, C, CO, G, N, W



NL-424 SH
Drop Opal Lens
B, BZ, C, CO, G, N, W



NL-425 SH
Frosted Dome Lens
B, BZ, C, CO, G, N, W



NL-426 SH
Frosted Flat Lens
B, BZ, C, CO, G, N, W



NL-427 SH
Frosted Flat/Clear Center Lens
B, BZ, C, CO, G, N, W



NL-486 SH
Square Baffle
W



NL-462 SH
Square Acrylic w/ Accent
(Gold)



NL-461 SH
Round Acrylic w/ Accent
(Gold), C



NL-495 CC SH
Metropolitan Moon Glass
B, P, F



NL-496 CC SH
Metropolitan Stepped Glass
B, P, F



NL-497 CC SH
Metropolitan Ice Light Glass
B, P, F



NL-498 SH
Floating Concentric Glass
B, BZ, C, CO, G, N, W



NL-438 SH
Reflector for Decorative Glass
NTG-4 Glass sold separately
(Clear Refl.) BZ, C, N, W



NTG-4
4" glass for NL-438
See pg 71 for glass options

See page 10 for description of reflector finishes and Custom Combos CC

TRUE 3" LOW VOLTAGE HOUSINGS

Nora's 3" Low Voltage housings are a true 3 inches! New reduced wattage housings are useful in meeting watts per square foot requirements. Available with magnetic or electronic transformer.

1" TO 2-1/2" APERTURE!



NLIC-301AT/1EL* 50W 120V Electronic
NLIC-301QAT/20 20W 120V Magnetic
NLIC-301QAT/37 37W 120V Magnetic
NLIC-301QAT 50W 120V Magnetic

TRUE 3" IC Airtight Low Voltage Housing
 Dia: 3" Depth: 8-1/8"



NL-301AT/1EL* 50W 120V Electronic
NL-301QAT/20 20W 120V Magnetic
NL-301QAT/37 37W 120V Magnetic
NL-301QAT 50W 120V Magnetic

TRUE 3" Airtight Low Voltage Housing
 Dia: 3" Depth: 4-1/2"



NLR-304AT/1EL* 50W 120V Electronic
NLR-304QAT/20 20W 120V Magnetic
NLR-304QAT/37 37W 120V Magnetic
NLR-304QAT 50W 120V Magnetic

TRUE 3" Airtight Low Voltage Remodel
 Dia: 3" Depth: 4-5/8"

*Available in wattage reduced 20W (/20) and 37W (/37)



LOW
Voltage

TRUE 3" LOW VOLTAGE TRIMS



NL-3310 cc

Adjustable Baffle 35°
BB, BC, BG, BW, BZBZ, COCO,
NN, WB, WBZ, WC, WG, WW
50W MR16



NL-3312 cc

Adjustable Baffle 35°
BB, BW, BZBZ, CBZ, CC, CG, CW,
COCO, GG, GW, HZW, NN, WW
50W MR16



NL-3337 cc

Cross Louver w/ Reflector
CW, GW
50W MR16



NL-3345 cc

Adj. Slot Aperture 35°
B, BZ, C, CO, G, N, W
50W MR16



NL-3348 cc

Wall Wash w/ Baffle
BB, BW, WW
50W MR16



NL-318

Hi-Tech Focus Beam
B, C, G, W
50W Bi-Pin GY6.35



NL-3365 cc

Adj. Gimbal Ring 35°
B, BZ, C, CO, G, N, W
50W MR16



NL-3366 cc

Front Load Gimbal Ring 35°
B, BZ, C, CO, G, N, W
50W MR16



NL-3318 cc

Eyeball w/ Baffle 10°
B, BZ, C, CO, G, N, W
50W MR16



NL-3325

Frosted Dome Lens
B, BZ, C, CO, G, N, W
50W Bi-Pin GY6.35



NL-3326

Frosted Flat Lens
B, BZ, C, CO, G, N, W
50W Bi-Pin GY6.35



NL-319

Floating Glass Reflector
G, W
50W MR16



NL-324BU

Hi-Tech Flat Glass
BU, P, W
50W MR16



NL-325W

Hi-Tech Stepped Glass
BU, P, W
50W MR16



NL-326P

Hi-Tech Donut Glass
BU, P, W
50W MR16



NL-327BU

Hi-Tech Flower Glass
BU, P, W
50W MR16

See page 10 for description of reflector
finishes and Custom Combos cc

LOW
Voltage

8" LINE VOLTAGE FRAME-INS ARCHITECTURAL & COMMERCIAL

8" Architectural and Commercial fixtures provide optimum performance and use of high wattage (300W) lamps for applications with high ceilings.



NHAV-8300

250W PAR38 / 300W PS25

8" Architectural Line Voltage Frame-In

Dia: 8-3/8" Depth: 10-1/2"



NH-300

250W PAR38 / 300W PS25

8" Commercial Line Voltage Frame-In

Dia: 8" Depth: 10-1/2"



NHR-300

250W PAR38 / 300W PS25

8" Architectural Line Voltage Remodel

Dia: 8-3/8" Depth: 9-3/4"

8" LINE VOLTAGE TRIMS



NTS-932GB

Reflector w/ Baffle
CB, CW, GB, GW



NTS-931G

Open Reflector
B, C, G, W



NTS-934C

Cross Louver
C, G



NTS-939SC

Open Single Wall Wash



NTS-939DC

Open Double Wall Wash



NTS-933G

Wall Wash w/ Lensed Refl.
C, G, W



NTS-935G

Regressed Lens w/ Refl.
G-Glass, L-Lexan, FG-Frost



NTS-936CL

Reflector w/ Flush Lens
CL-Clear, FL-Frost



NTS-938C

Reflector for Decorative Glass
NTG-8 Glass sold separately
See pg 71 for glass options

See page 10 for description of reflector finishes and Custom Combos 

6" LINE VOLTAGE FRAME-INS ARCHITECTURAL & COMMERCIAL

8" Architectural and Commercial fixtures provide optimum performance for commercial applications with high ceilings.

NHAV-6150


150W A21 / PAR38
6" Architectural Line Voltage Frame-In
Dia: 6-3/8" Depth: 10-1/2"

NH-150

150W A21 / PAR38
6" Commercial Line Voltage Frame-In
Dia: 6-3/8" Depth: 10-1/2"

NHR-150

150W A21 / PAR38
6" Architectural Line Voltage Remodel
Dia: 6-3/8" Depth: 9-3/4"

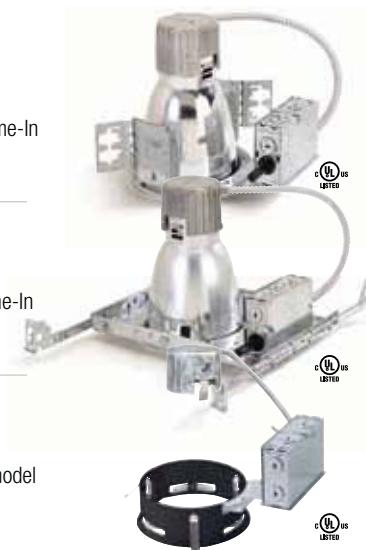

6" LINE VOLTAGE TRIMS



NTS-730B CC

Reflector w/ Baffle
B, W



NTS-731C CC

Open Reflector
B, C, CWF, G, W



NTS-737G CC

Cross Louver
C, CWF, G



NTS-739SC CC

Open Single Wall Wash



NTS-739DC CC

Open Double Wall Wash



NTS-736C CC

Wall Wash w/ Lensed Refl.
C, G



NTS-734B CC

Wall wash w/ Baffle
B, W



NTS-732B CC

Regress Albalite Lens w/ Baffle
B, W



NTS-743W CC

Regress Fresnel Lens w/ Baffle
W



NTS-735B CC

Regressed Drop Opal w/ Baffle
B, W



NTS-733CL CC

Reflector w/ Flush Lens
CL-Clear, FL-Frost



NTS-738C

Reflector for Decorative Glass
NTG-6 Glass sold separately
See pg 71 for glass options

LINE
Voltage

6" LINE VOLTAGE HOUSINGS ECONOMY & LIGHT COMMERCIAL

All Nora 6" housings are thermally protected, listed for damp location, and include an adjustable socket, 24-1/2" adjustable bar hangers with captive nails and quick connector. Trim determines maximum wattage.

NB No Bracket-Floating Socket **SH** Shallow **CC** Custom Combinations **AT** Airtight



NHC-17/100DWQA
A19 / BR/PAR30 / BR40/PAR38
6" IC Airtight Line Voltage Housing
Dia: 6-3/8" Depth: 7-3/4"



NHC-17QAT
NHC-17QAT/FX* Fire Rated
NB NHC-17QNBAT Floating Socket
A19 / R/PAR20 / BR/PAR30 / BR40/PAR38
6" IC Airtight Line Voltage Housing
Dia: 6-3/8" Depth: 7-1/2"
* See page 70 for dimensions of fire box



NHRIC-17QAT
NB NHRIC-17QNBAT Floating Socket
A19 / R/PAR20 / BR/PAR30 / BR40/PAR38
6" IC Airtight Line Voltage Remodel
Dia: 6-3/8" Depth: 7-1/2"



SH NHC-27QAT A19 / R/PAR20 / BR/PAR30
6" IC AT Line Volt. Shallow Housing
Dia: 6-3/8" Depth: 5-1/2"



SH NHRIC-27QAT A19 / R/PAR20 / BR/PAR30
6" IC AT Line Volt. Shallow Remodel
Dia: 6-3/8" Depth: 5-1/2"



NH-26Q
NH-26Q/FX* Fire Rated
NB NH-26QNB Floating Socket
A19 / R/PAR20 / BR/PAR30 / BR40/PAR38
6" Non-IC Line Voltage Housing
Dia: 6-3/8" Depth: 7-1/2"



NHR-26Q
A19 / R/PAR20 / BR/PAR30 / BR40/PAR38
6" Non-IC Line Voltage Remodel
Dia: 6-3/8" Depth: 7-1/2"



SH NH-27Q A19 / R/PAR20 / BR/PAR30
6" Non-IC Line Volt. Shallow Housing
Dia: 6-3/8" Depth: 5-1/2"



SH NHR-27Q A19 / R/PAR20 / BR/PAR30
6" Non-IC Line Volt. Shallow Remodel
Dia: 6-3/8" Depth: 5-1/2"

* See page 70 for Fire Box dimensions

LINE
Voltage

6" LINE VOLTAGE TRIMS

BAFFLE TRIMS



NTM-713WAL ^{NEW}
Airtight Aluminum Cone Baffle
BR/PAR30 / BR40/PAR38
BAL, WAL



NTA-730W ^{NB} ^{NEW}
Airtight Cone Reflector w/ Baffle
A19 / BR/PAR30 / BR40/PAR38
B, W



NTA-101 (B), BZ, CO, N
NTA-102 (W)
Cone Reflector w/ Baffle
A19 lamp



NTM-30CO (Black Baffle) ^{CC} ^{SH}
NTP-30 (Black) Phenolic
BR/PAR30 Stepped Baffle
Ring: B, BZ, C, CO, G, N, (W)



NTM-31 (White Baffle) ^{CC} ^{SH}
NTP-31 (White) Phenolic
BR/PAR30 Stepped Baffle
Ring: B, BZ, C, CO, G, N, (W)



NTM-32 (Natural Metal) ^{CC} ^{SH}
NTM-33 (Copper)
BR/PAR30 Stepped Baffle
Ring matches Baffle



NTM-40 (B) ^{CC}
NTP-40 (B) Phenolic
BR40/PAR38 Stepped Baffle
Ring: B, BZ, C, CO, G, N, (W)



NTM-41 (W), BZ, CO, N
NTP-41 (W) Phenolic
BR40/PAR38 Stepped Baffle
Ring: B, BZ, C, CO, G, N, (W)



NTM-34 (Bronze) ^{CC} ^{SH}
BR/PAR30 Stepped Baffle
Ring matches Baffle



NTM-29BG ^{SH} BR/PAR30
Open Stepped Baffle
BC, BG, BW, WC, WG, WW



NT-641W ^{SH} R/PAR20
Designer Stepped Baffle
Baffle: B, CO, W Ring: (W)



NL-675B ^{SH} PAR16
Adjustable Stepped Baffle
B, W 35°

REFLECTOR TRIMS



NTS-714 ^{NB} ^{CC} ^{NEW}
Airtight Cone Reflector
A19 / BR/PAR30 / BR40/PAR38
B, C, G,W



NTA-96 (G) ^{CC}
NTA-97 (C), HZ
A19 Cone Reflector
Ring: B, BZ, C, CO, G, N, (W)



NTA-98 (B), BZ, CO, N ^{CC}
NTA-99 (W)
A19 Cone Reflector
Ring: B, BZ, C, CO, G, N, (W)



NTS-30 (G) ^{CC}
NTS-31 (C), HZ
NTS-32 (B), BZ, CO, N
NTS-33 (W)
BR/PAR30 Reflector
Ring: B, BZ, C, CO, G, N, (W)



NTS-41C (C), HZ ^{CC}
NTS-40 (G)
NTS-42 (B)
NTS-43 (W)
BR40/PAR30 Reflector
Ring: B, BZ, C, CO, G, N, (W)



NTS-642 (G)
NTS-643 (B)
NTS-644 (C)
NTS-646 (W)
Designer Reflector
R/PAR20

See page 10 for description of reflector finishes and Custom Combos ^{CC}

See page 71 for optional trim rings

6" LINE VOLTAGE TRIMS cont.

ADJUSTABLE & EYEBALL TRIMS



NL-675B **CC**
Adjustable Stepped Baffle
PAR16 35°
B, W



NTM-38 Black Baffle
NTM-39 White Baffle
Eyeball w/ Baffle
75W BR/PAR30 30°



NT-28 (W), B, BZ, CO, N
NT-29 C, G
Eyeball Metal Trim
75W BR/PAR30 30°



NTM-52C **NB SH**
PAR30 Open Gimbal
B, BZ, C, CO, G, N, W 30°



NTM-53G **NB**
PAR38 Open Gimbal
B, BZ, C, CO, G, N, W 25°



NL-665CO **NB SH**
Surface Round Spot 55W PAR16
(B), BZ, C, CO, G, N, W 45°



NTM-48 (BW), BB
NTM-49 (WW), BZ, CO, N
Baffle w/ Regressed Eyeball
75W BR/PAR30 35°



NTM-50C **NB SH CC**
Baffle w/ Regressed Eyeball
75W BR/PAR30 35°
C, G Baffle: Black



NTM-628B **NB SH CC**
Baffle w/ Regressed Eyeball
50W R/PAR20 20°
B, W



NTM-54CO **NB SH CC**
Baffle w/ Adjustable Gimbal
75W PAR30 30°
B, BZ, CO, N, W



NTM-55BZ **NB SH CC**
Baffle w/ Adjustable Gimbal
100W/150W PAR38 20°
B, BZ, CO, N, W



NL-670N **NB SH CC**
Baffle w/ Spot Cylinder
50W PAR16 35°
B, BZ, CO, N, W



NTS-49C **NB SH CC**
Reflector w/ Regressed Eyeball
75W BR/PAR30 20°
B, C, G, W



NTM-56BG **NB SH CC**
Reflector w/ Adj. Gimbal
75W PAR30 20°
B, C, G, W



NTM-57C **NB CC**
Reflector w/ Adj. Gimbal
100W/150W PAR38 20°
B, C, G, W

OPEN TRIMS

NB also NTM-300 w/ Bracket



NT-30BZ (W), BZ, CO, N
NT-31 (G) **NT-32** (C)
NT-33 (B)
Open Metal 75W BR/PAR30



NT-43 (B) **NT-40** (W), N
NT-41 (G) **NT-42** (C)
Open Metal Trim
100W/150W BR40/PAR38



NT-620 **SH**
Designer Open Metal Trim
50W R/PAR20
B, C, G, W



NT-30DCO (W), BZ, CO, N
NT-33D (B)
Splay Metal Trim
75W BR/PAR30



NT-40D (W)
NT-43D (B)
Splay Metal Trim
100W/150W BR40/PAR38



NT-50 **SH**
1-3/4" Metal Pinhole
40W/60W A19
B, BZ, CO, N, (W)

See page 10 for description of reflector finishes and Custom Combos **CC**

WALL WASH TRIMS



NT-648 50W R/PAR20
Wall Wash w/ Baffle
B, W



NT-25 50W R/PAR20
NT-650 w/ Reflector A19
Wall Wash B, (W)



NT-51 40W/60W A19
Slot Aperture
B, BZ, CO, (W)



NTA-103 w/ Cone Reflector
B, BZ, CO, N, W A19
SH **NT-45** (B) **NT-46** (W)
75W R/PAR30
Wall Wash w/ Baffle



NT-86 (G) **NT-87** (C)
NT-88 (B), BZ, CO, N
NT-86 (W)
Wall Wash w/ Cone Reflector
60W/100W A19



NTS-35C **SH** **CC**
Wall Wash w/ Reflector
75W R/PAR30
B, C, G, W

LENSLESS SHOWER / LENSED TRIMS



NTM-726 **NB** **SH**
Lensless Shower Trim
100W/150W PAR38
B, BZ, CO, N, W



NTS-25 Cone Reflector
Frosted Dome Lens
40W/60W A19
(White), B, BZ, C, CO, G, N



NTS-26 Cone Reflector
Frosted Flat Lens
40W/60W A19
(White), B, BZ, C, CO, G, N



NTS-22N Cone Reflector
SH **NT-22** Metal
(White), B, BZ, C, CO, G, N
SH **NP-22** Plastic (White)
Albalite Lens
25W/40W/60W A19



NTS-23BZ Cone Reflector
SH **NT-23** Metal
(White), B, BZ, C, CO, G, N
SH **NP-23** Plastic (White)
Fresnel Lens
25W/40W/60W A19



NTS-24 Cone Reflector
SH **NT-24** Metal
(White), B, BZ, C, CO, G, N
SH **NP-24** **NP-24PC** Plastic
Drop Opal Lens
25W/40W/60W A19



NTM-322 Metal
B, BZ, C, CO, G, N, W
NP-322 Plastic (White)
Albalite Lens w/ Bracket
40W/60W A19



NTM-323 Metal
B, BZ, C, CO, G, N, W
NP-323 Plastic (White)
Fresnel Lens w/ Bracket
40W/60W A19



NTM-324 Metal
B, BZ, C, CO, G, N, W
NP-324 Plastic (White)
Drop Opal w/ Bracket
40W/60W A19



NTM-42 **SH** **CC**
Reg. Albalite Lens w/ Baffle
40W/60W A19
(Black), BZ, CO, N, W



NTM-43 **SH** **CC**
Reg. Fresnel Lens w/ Baffle
40W/60W A19
(Black), BZ, CO, N, W



NTM-46 **SH** **CC**
Reg. Drop Opal w/ Baffle
40W/60W A19
BZ, CO, M, N, W



NT-622 **SH**
Designer Albalite Lens
25W/40W/60W A19
B, C, G, W



NT-624 **SH**
Designer Drop Opal
25W/40W/60W A19
B, C, G, W



NTA-638 BZ, C, N, W
Reflector for Decorative Glass
60W/100W A19

NTG-6 Glass sold separately
See pg 71 for glass options

5" LINE VOLTAGE HOUSINGS

Nora 5" housings are thermally protected, listed for damp location, and include an adjustable socket, 24-1/2" adjustable bar hangers with captive nails and quick connector. Trim determines maximum wattage.

SH Shallow **CC** Custom Combinations **Airtight**



NHIC-501QAT Floating Socket
75W Medium Base
5" IC Airtight Line Voltage Housing
Dia: 5-5/8" Depth: 7-1/2"



NHRIC-504QAT Floating Socket
75W Medium Base
5" IC Airtight Line Voltage Remodel
Dia: 5-5/8" Depth: 7-1/2"



NH-501Q Floating Socket
75W Medium Base
5" Non-IC Line Voltage Housing
Dia: 5-5/8" Depth: 7-1/2"



NHR-504Q Floating Socket
75W Medium Base
5" Non-IC Line Voltage Remodel
Dia: 5-5/8" Depth: 7-1/2"



SH NHIC-527QAT
75W Medium Base
5" IC Airtight Line Voltage
Shallow Housing
Dia: 5-5/8" Depth: 5-7/8"



SH NHRIC-527QAT
75W Medium Base
5" IC Airtight Line Voltage
Shallow Remodel
Dia: 5-5/8" Depth: 5-7/8"

5" LINE VOLTAGE TRIMS



NT-5001N
Baffle Splay
50W/75W BR/PAR30
B, BZ, CO, MW, N, W



NT-5010CO **CC**
Baffle Splay w/ Ring
50W/75W BR/PAR30
B, BZ, CO, N, W



NT-5045W
Cone Baffle w/ Wall Wash
75W BR/PAR30
B, BZ, CO, N, W



NT-5000CO
Splay Trim
75W BR/PAR30
BZ, CO, N, W



NT-5000W
Splay Trim
75W BR/PAR30
BZ, CO, N, W



NT-5030W
Open Trim
75W BR/PAR30
BZ, C, CO, N, W

LINE
Voltage

5" LINE VOLTAGE TRIMS cont.



NT-5012B **CC**
Deep Phenolic Baffle
75W BR/PAR30
B, BZ, CO, N, W



NTM-513B **SH** **SH**
Airtight Cone Baffle
50W/75W BR/PAR30
B, W, WM



NTM-5014W **CC** **SH**
Airtight Cone Reflector
75W BR/PAR30
B, BZ, C, CO, G, HZ, N, W



NT-5020B **CC**
Reflector
75W BR/PAR30
B, C, G, W



NT-5021G **CC**
Cone Reflector
40W/60W A9
B, BZ, C, CO, G, HZ, N, W



NT-5070N **SH**
Shallow Cone Reflector
35W BR/PAR30
B, BZ, C, CO, G, HZ, N, W



NT-5060CO
PAR30 Gimbal 30°
50W/75W PAR30
B, BZ, CO, N, W



NT-5071N
PAR20 Eyeball 30°
50W R/PAR20
B, BZ, CO, N, W



NT-5070W **SH**
PAR30 Eyeball 30°
50W/75W BR/PAR30
B, BZ, CO, N, W



NT-5061BZ
Baffle w/ Regressed Gimbal
75W PAR30 30°
B, BZ, CO, N, W



NT-5048B **CC** **SH**
Baffle w/ Regressed Eyeball
50W/75W BR/PAR30 35°
B, N, W



NT-5049C **CC** **SH**
Reflector w/ Regressed Eyeball
50W/75W BR/PAR30 35°
C, G



NT-5022N 40W/60W A19
NTS-5022* Front Load **SH**
25W/60W A19 35W PAR30
Albalite Lens
B, BZ, C, CO, G, N, W



NT-5023BZ 40W/60W A19
NTS-5023* Front Load **SH**
25W/60W A19 35W PAR30
Fresnel Lens
B, BZ, C, CO, G, N, W



NT-5024W 40W/60W A19
NTS-5024* Front Load **SH**
25W/60W A19 35W PAR30
Drop Opal Lens
B, BZ, C, CO, G, N, W



NT-5050 **SH**
Frosted Dome w/ Reflector
40W/60W A19 35W PAR30
B, BZ, CO, N, W



NT-5025W 40W/60W A19
NTS-5025* Front Load **SH**
25W/60W A19 35W PAR30
Frosted Dome Lens
B, BZ, C, CO, G, N, W



NT-5026C 40W/60W A19
NTS-5026* Front Load **SH**
25W/60W A19 35W PAR30
Frosted Flat Lens
B, BZ, C, CO, G, N, W



NTM-526 **SH**
Lensless Shower Baffle Cone
75W PAR30
B, BZ, CO, N, W



NTS-5038W **SH**
Reflector for Decorative Glass
NTG-5 Glass sold separately
25W/60W A19 35W PAR30
BZ, C, N, W
*With Reflector



NTG-5
Decorative Glass for **NTS-5038**
See pg 71 for glass options

See page 10 for description of reflector finishes and Custom Combos **CC**

4" LINE VOLTAGE HOUSINGS 50W PAR/R20

All Nora 4" housings are thermally protected, listed for damp location, listed for feed through and include an adjustable socket, 24-1/2" adjustable bar hangers with captive nails and quick connects.



NSIC-401QAT 50W R/PAR20
4" IC Airtight Double Wall Line Voltage Housing
Dia: 4-3/8" Depth: 6"



NS-401QAT 50W R/PAR20
4" Non-IC Airtight Line Voltage Housing
Dia: 4-3/8" Depth: 5-3/4"



NSR-404QAT 50W R/PAR20
4" Non-IC Airtight Line Voltage Remodel
Dia: 4-3/8" Depth: 5-5/8"

4" LINE VOLTAGE TRIMS



NS-4910WN cc
Square Trim w/ Baffle
BB, BBZ, BCO,
WC, WG, WN, WW



NS-4914GW cc
Square Trim w/ Reflector
BB, BZBZ, CB, CC, CG, CW,
COCO, GW, HZW, NN



NS-4912W cc
Square Trim w/ Gimbal
BZ, CO, N, W 20°



NS-4940CO
Square Trim w/ 1" Pinhole
B, BZ, C, CO, G, N, W



NS-4926CO
Square w/ Frost Flat Lens
B, BZ, C, CO, G, N, W



NS-4927W
Square w/ Frost Flat Lens
w/ Clear Center
B, BZ, C, CO, G, N, W



NS-40 (W), BZ, CO, N
NS-41 (Black Baffle)
Stepped Baffle



NS-40 (White Baffle)
NS-41 (Black Baffle)
Adj. Stepped Baffle 15°



NS-40P (W) **NS-41P** (B)
Phenolic Stepped Baffle
w/ White Plastic Ring

See page 10 for description of reflector finishes and Custom Combos cc

4" LINE VOLTAGE TRIMS cont. 50W PAR/R20



**NS-42 (G) NS-43 (B)
NS-44 (C), HZ NS-46 (W)**
Reflector
Ring: B, BZ, C, CO, G, N, W



**NS-52 (Natural Metal)
NS-53 (Copper), BZ**
Reflector w/ Matching Ring



**NS-42A (G) NS-43A (B)
NS-44A (C) NS-46A (W)**
Adjustable Reflector 15°



NS-57CW
Cross Louver Reflector
CW, GW



**NS-48 (White), BZ, CO, N
NS-49 (Black Baffle)**
Wall Wash w/ Baffle



**NS-50 (White)
NS-58 (Chrome)**
Wall Wash w/ Reflector



NS-12N
Surface Gimbal 20°
BZ, CO, N, W



**NS-18CO (W), B, BZ, CO, N
NS-19 C, G**
Eyeball Trim 15°



NS-47N
Adjustable Slot Aperture 10°
B, BZ, CO, N, (White)



NS-45CO
1" Pinhole
B, BZ, CO, N, (White)



**NL-420 (Black Baffle)
NL-421 (White Baffle)**
2" Pinhole w/ Baffle 45W PAR16



NS-76W
Lensless Shower Baffle Cone
B, BZ, CO, N, W



NS-22B
Albalite Lens
B, BZ, C, CO, G, N, W



NS-23W
Fresnel Lens
B, BZ, C, CO, G, N, W



NS-24G
Drop Opal Lens
B, BZ, C, CO, G, N, W



NS-25W
Frosted Dome Lens
B, BZ, C, CO, G, N, W



NS-26W
Frosted Flat Lens
B, BZ, C, CO, G, N, W



NS-27W
Frosted Flat/Clear Center Lens
B, BZ, C, CO, G, N, W



NL-498BZ 45W PAR16
Floating Concentric Glass
B, BZ, C, CO, G, N, W



NS-38W
Reflector for Decorative Glass
NTG-4 Glass sold separately
BZ, C, N, W



NTG-4
Decorative Glass for **NS-38**
See pg 71 for glass options

See page 10 for description of reflector finishes and Custom Combos **CC**

4" LINE VOLTAGE GU10 MR16 HOUSINGS

Line Voltage Halogen fixtures do not require a transformer. Housings include quick connectors, and new and improved 120V, 50W GU10 lamp. **50MR16EXN/L10S** 50W MR16 GU10 lamp w/ silver back sold separately.



NSLIC-401AT/10
50W MR16 GU10 lamp included
4" IC Airtight Double Wall
MR16 GU10 Line Voltage Housing
Dia: 4-3/8" Depth: 8"



NSL-401AT/10
50W MR16 GU10 lamp included
4" Non-IC Airtight MR16 GU10
Line Voltage Housing
Dia: 4-3/8" Depth: 5-3/4"



NSR-404QAT/10
50W MR16 GU10 lamp included
4" Non-IC Airtight MR16 GU10
Line Voltage Remodel
Dia: 4-3/8" Depth: 5-5/8"

4" LINE VOLTAGE MR16 GU10 TRIMS



NL-4810WN **CC**
Square Trim w/ Baffle
BB, BBZ, BCO, WC,
WG, WN, WW 35°



NL-4814CW **CC**
Square Trim w/ Reflector
BB, BZBZ, CB, CC, CG, CW,
COCO, GW, HZW, NN 35°



NL-4814GW **CC**
Square Trim w/ Reflector
BB, BZBZ, CB, CC, CG, CW,
COCO, GW, HZW, NN 35°



NL-4863BW **CC**
Square Trim w/ Baffle Gimbal
BB, BC, BG, BW, BZBZ,
COCO, NN, WW 35°



NL-4865N **CC**
Square Trim w/ Gimbal
B, BZ, C, CO,
G, N, W 35°



NL-4840N
Square Trim w/ 1" Pinhole
B, BZ, C, CO,
G, N, W 35°



NL-4825CO
Square w/ Frosted Dome
B, BZ, C, CO, G, N, W



NL-4826W
Square w/ Frost Flat Lens
B, BZ, C, CO, G, N, W



NL-4827W
Frost Flat w/ Clear Center Lens
B, BZ, C, CO, G, N, W



NL-498B
Floating Concentric Glass
B, BZ, C, CO, G, N, W



NL-438W BZ, C, N, W
Reflector for Decorative Glass
NTG-4 Glass sold separately



NTG-4
Decorative Glass for NTS-5038
See pg 71 for glass options

LINE
Voltage

WET

WET

WET

4" LINE VOLT. GU10 MR16 TRIMS cont.



NL-410W cc
Adjustable Baffle 35°
BZ, CO, N, P, (White)



NL-411G cc
Adjustable Black Baffle 35°
Ring: B, BZ, C, CO, G, N, P, (W)



NL-468B cc
Adjustable Baffle 45°
B, W



NL-412 (G) cc **NL-413 (B)**
NL-414 (C), HZ **NL-416 (W)**
Adjustable Reflector 35°



NL-452 (Natural Metal)
NL-413 (Copper), BZ
Adjustable Reflector 35°



NL-469CO cc
Adjustable Reflector 45°
B, BZ, C, CO, G, HZ, N, W



NL-417CW cc
Cross Louver w/ Reflector
CW, GW



NL-448 (B Baffle), BZ, CO, N
NL-449 (W Baffle)
Adjustable Wall Wash w/ Baffle



NL-450 (White)
Adjustable Wall Wash
w/ Reflector



NL-445N
Adjustable Slot Aperture
B, BZ, CO, N, (White)



NL-420 (B Baffle)
NL-421 (W Baffle)
2" Pinhole w/ Baffle



NL-440CO
1" Pinhole
B, BZ, C, CO, G, N, (White)



NL-422G
Albalite Lens
B, BZ, C, CO, G, N, W



NL-423W
Fresnel Lens
B, BZ, C, CO, G, N, W



NL-424N
Drop Opal Lens
B, BZ, C, CO, G, N, W



NL-486W
Plastic Square Baffle



NL-462
Square Acrylic w/ Accent



NL-461C (Gold), C
Round Acrylic w/ Accent



NL-495P B, P, F
Metropolitan Moon Glass



NL-496F B, P, F
Metropolitan Stepped Glass



NL-497B B, P, F
Metropolitan Ice Light



NL-418CO
BB, BZ, CO, N, WB, WW
NL-419 C, G
Adj. Eyeball w/ Baffle 35°



NL-463CO
Gimbal w/ Baffle
BB, BC, BG, BN, BW, BZ, CO,
WB, WC, WG, WW 35°



NL-465CO
Surface Adjustable
B, BZ, C, CO, G, N, W
35°



NL-491N
Adjustable Spot
B, N, W 30°



NL-490W
Adjustable Drop Gimbal
B, W 90°

LINE
Voltage

TRUE 3" LINE VOLT. GU10 MR16 HOUSINGS

Line Voltage Halogen fixtures do not require a transformer. Housings include quick connectors, and new and improved 120V, 50W GU10 lamp.

NEW!



NHIC-350AT

50W MR16 GU10 lamp included
3" IC Airtight Double Wall
MR16 GU10 Line Voltage Housing
Dia: 3" Depth: 8-1/8"



NH-350AT

50W MR16 GU10 lamp included
3" Non-IC Airtight MR16 GU10
Line Voltage Housing
Dia: 3" Depth: 4-1/2"



NHR-354AT

50W MR16 GU10 lamp included
3" Non-IC Airtight MR16 GU10
Line Voltage Remodel
Dia: 3" Depth: 4-5/8"



50MR16EXN/L10S

50W MR16 GU10 lamp w/ silver back
Sold separately

TRUE 3" LINE VOLT. MR16 GU10 TRIMS



NL-3310NN cc

Adjustable Baffle w/ Ring
Baffle: B, BZ, CO, N, W



NL-3312CBZ cc

Adjustable Reflector w/ Ring
Ref.: B, C, BZ, CO, G, HZ, N, W



NL-3337GW cc

Cross Louver w/ Reflector
CW, GW



NL-3345BZ

Adjustable Slot Aperture
B, BZ, C, CO, G, N, W 35°



NL-3318W cc

Eyeball w/ Baffle
B, BZ, C, CO, G, N, W 10°



NL-3348BW cc

Wall Wash w/ Baffle
BB, BW, WW



NL-3325G

Frosted Dome Lens
B, BZ, C, CO, G, N, W



NL-3326W

Frosted Flat Lens
B, BZ, C, CO, G, N, W

See page 10 for description of reflector finishes and Custom Combos cc

LINE
Voltage

6" SLOPED CEILING LINE VOLT. HOUSINGS

NHIC-926/DWQAT 100W Medium Base
6" IC Airtight Double Wall, High Wattage,
Sloped Ceiling Line Voltage Housing
Dia: 6-1/2" x 7" Depth: 7-3/4"



NHIC-926QAT 75W Medium Base
6" IC Airtight Sloped Ceiling
Line Voltage Housing
Dia: 6-1/2" x 7" Depth: 7"



NHRIC-926QAT 75W Medium Base
6" IC Airtight Sloped Ceiling
Line Voltage Remodel
Dia: 6-1/2" x 7" Depth: 7-1/2"



NH-926Q 150W Medium Base
6" Non-IC Sloped Ceiling Line Volt. Housing
Dia: 6-1/2" x 7" Depth: 7"



NHR-926Q 150W Medium Base
6" Non-IC Sloped Ceiling Line Volt. Housing
Dia: 6-1/2" x 7" Depth: 7-1/2"



6" SLOPED CEILING LINE VOLT TRIMS



NTM-615B Metal Baffle
NTP-614B Phenolic
Sloped Baffle B, W



NTS-615G
Sloped Reflector
B, C, G, W



NT-28CO (W), B, BZ, CO, N
NT-29 C, G
Eyeball 45°



NTM-38 (B Baffle)
NTM-39 (W Baffle)
PAR30 White Eyeball 25°



NTM-52N 23°-32°
PAR30 Open Gimbal
B, BZ, C, CO, G, N, W



NTM-53BZ 25°
PAR38 Open Gimbal
B, BZ, C, CO, G, N, W



NT-25 A19
Wall Wash
(White), B



NT-22CO Albalite Lens A19
NT-23 Fresnel Lens A19
B, BZ, C, CO, G, N, (White)



NT-24W A19
Drop Opal Lens
B, BZ, C, CO, G, N, W