
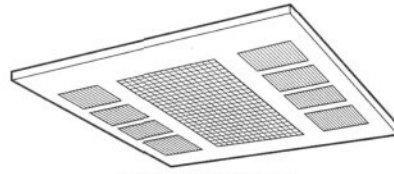


# CEILING MOUNTED HEATERS

## COMMERCIAL FAN FORCED CEILING HEATER – TYPE CDF, SERIES 500

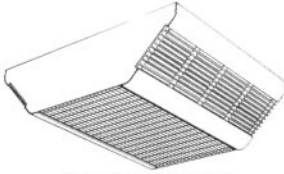

• Navajo white finish

**SURFACE MOUNT**  
20" L x 16 1/2" W x 5 3/4" D

**RECESSED MOUNT**  
23 3/4" L x 23 3/4" W x 7" D



CATALOG NUMBER	UPC	DESCRIPTION	KW <sup>1</sup>	BTU/HR. (000)	VOLTS	AMPS	PHASE <sup>2</sup>	SHIPPING WT.	LIST (EA.)
CDF548	685360015101	Heater			208	19.2/14.2/9.6	1 - 3		
CDF542	685360015088	Heater Section Only	4/3/2	13.7/10.2/6.8	240	16.7/12.5/8.3	1 - 3	27 lbs.	\$803.00
CDF547	685360015095				277	14.4/10.8/7.2	1		
CDF558	685360015132	Heater			208	24.0/18.3/12.0	1 - 3		
CDF552	685360015118	Heater Section Only	5/3.8/2.5	17.1/13.0/8.5	240	20.8/15.8/10.4	1 - 3	27 lbs.	\$883.00
CDF557	685360015125				277	18.1/13.7/9.0	1		
CDFSE	685360015019	Surface Mounting Enclosure Only - To Be Used With Above Heater Section. Dim: 20" L x 16 1/2" W x 5 3/4" D						10 lbs.	\$271.00
CDFRE	685360014982	Recess Mounting Enclosure Only - To Be Used With Above Heater Sections. Dim: 23 3/4" L x 23 3/4" W x 7" D.						18 lbs.	\$271.00

### Accessories Field Installed Kits\*\*

CDFTR7	685360015064	277V Primary Transformer/24V sec. and 24V holding coil control relay.						1 lb.	\$95.00
CDFTR4	685360015057	208/240V Primary Transformer/24V sec. and 24V holding coil control relay.						1 lb.	\$95.00
CDFTK	685360015040	Trim Ring for mounting on permanent ceiling (can not be factory installed).						1 lb.	\$42.60
CDFDS	685360014968	Power Disconnect Switch (3-Pole) 30 amps, 600 volts, 1Ø, 60 Hz.						1 lb.	\$245.00
CDFR12	685360015002	Relay (Time Delay 45 - 60 sec. to close when energized) requires 120 volt supply from remote source.						1 lb.	\$61.00
CDF24R	685360015071	Relay (Time Delay 45 - 60 sec. to close when energized) requires 24 volt supply from remote source.						1 lb.	\$61.00
CDFTR7	685360015033	Thermostat SPST Range 45 to 95°F.						1 lb.	\$100.00

<sup>1</sup>Factory wired for highest wattage, field convertible to lower wattages. <sup>2</sup>Factory wired 1Ø, field convertible to 3Ø.  
\*\* For factory installation of above controls, add \$60.00 List. Not applicable on 20 or more heaters.

## CEILING MOUNTED, FAN-FORCED HEATER – QCH SERIES

DESCRIPTION	CATALOG NUMBER	UPC 685360	VOLTS	WATTS**	AMPS	DIMENSIONS (INCHES)	STANDARD CARTON		LIST (EA.)
							QUANTITY	WT. LBS.	
	QCH1101	058757	120	1000	8.3	Housing: 19" W x 9" W x 3 3/4" D	1	10	\$251.00
	QCH1151	058764	120	1500	12.5				
	QCH1202	058795	240/208	2000/1500	8.3/7.2				
	QCH1207	058801	277/240	2000/1500	7.2/6.3				

• Navajo white finish  
The QCH requires two separate leads from heater to field supplied single pole wall thermostat.

### ACCESSORIES

QCHSM	058726	Surface Mounting Frame							
QCHS1	058733	1" Semi-Recessed Frame					1	2	\$45.70
*QCHS2	058740	2" Semi-Recessed Frame							
*QCHTBF	087382	T-Bar Frame Kit					1	5	\$80.00

\*Allow 5-7 working days for shipment.  
\*\*As Shipped - Field Adjustable to 1/2 Wattage.