

Product data sheet


Characteristics

13965

Kaedra - for modular device - 2 x 18 modules - 1 terminal block

Product availability : Stock - Normally stocked in distribution facility

Price* : 504.00 USD

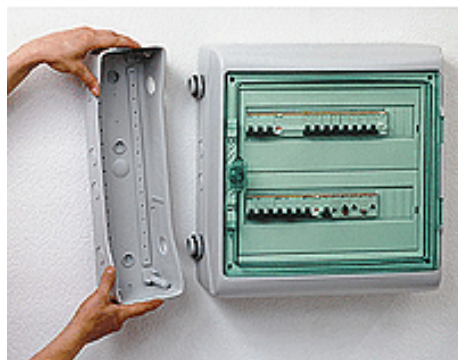

Main

Range	Kaedra
Product or component type	Weatherproof enclosure
Enclosure type	Enclosure for modular device
Accessories included with enclosure	2 wiring straps 1 terminal block support 2 marking kits 1 terminal block 32 holes

Complementary

Enclosure mounting	Surface
Number of 18 mm modules per row	18
Total number of 18 mm modules	36
Number of horizontal rows	2
Electrical insulation class	Double insulation Class II
Provided equipment	2 marking kit 2 wiring strap 1 terminal block support 1 terminal block 32 holes
Type of front cover	Reversible Transparent
[In] rated current	90 A
Type of rail	DIN
Number of pre-cutouts PG ISO	17
Number of terminal blocks	1 with 32 outgoing
Distribution block outgoing	16 x 10 mm ² 16 x 16 mm ²
Locking options description	Optional keylock

Enclosure material	Self-extinguishing polymer
Width	17.64 in (448 mm)
Height	18.11 in (460 mm)
Depth	6.3 in (160 mm)
Colour	Door : transparent green Enclosure : light grey (RAL 7035)

Environment

Standards	IEC 60529 IEC 670 IEC 60439-3 EN 50102 EN 50262
Fire resistance	1382 °F (750 °C) conforming to IEC 60695-2-1
IP degree of protection	IP65 conforming to IEC 60529
IK degree of protection	IK09 conforming to EN 50102
Environmental characteristic	UV resistant class 3 conforming to ISO 4582 2010 Ultraviolet degradation test conforming to ISO 4892-2 2013
Overvoltage category	II
Ambient air temperature for operation	-13...140 °F (-25...60 °C)

Ordering and shipping details

Category	00908 - C60N SUPPLEMENTARY PROTECTORS
Discount Schedule	DE2
GTIN	00785901815914
Nbr. of units in pkg.	1
Package weight(Lbs)	8.560000000000005
Returnability	N
Country of origin	IT

Contractual warranty

Warranty period	18 months
-----------------	-----------