


Product availability : Stock - Normally stocked in distribution facility

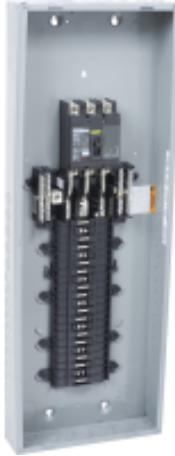

### Main

|                                   |   |
|-----------------------------------|---|
| Product or component type         | Load Center   |
| Range of product                  | QO  |
| Load center type                  | Main breaker  |
| Line Rated Current                | 125 A   |
| Number of spaces                  | 42  |
| Short-circuit current             | 25 kA   |
| Number of circuits                | 42  |
| Number of tandem circuit breakers | 0   |
| Phase                             | 3 phases  |
| System Voltage                    | 208Y/120 V AC<br>240/120 V delta AC<br>240 V delta AC |

### Complementary

|                           |                                      |
|---------------------------|--------------------------------------|
| AWG gauge                 | AWG 4...300 kcmil (aluminium/copper) |
| NEMA degree of protection | NEMA 1 indoor                        |
| Cover type                | Order separately                     |
| Electrical connection     | Lugs                                 |
| Device composition        | Grounding bar (ordered separately)   |
| Electrical connection     | Lugs                                 |
| Wiring configuration      | 4-wire<br>3-wire                     |
| Material                  | Tin plated copper busbar             |
| Enclosure material        | Welded sheet steel                   |
| Surface finish            | Baked enamel grey                    |
| Box number                | 12                                   |
| Product certifications    | UL listed                            |
| Height                    | 39.37 in (1000 mm)                   |
| Width                     | 14.25 in (362 mm)                    |

## Ordering and shipping details

|                       |                                   |
|-----------------------|-----------------------------------|
| Category              | 00011 - QO 3PH LOAD CENTER,INDOOR |
| Discount Schedule     | DE3                               |
| GTIN                  | 00785901456278                    |
| Nbr. of units in pkg. | 1                                 |
| Package weight(Lbs)   | 26.690000000000001                |
| Returnability         | N                                 |
| Country of origin     | US                                |

## Offer Sustainability

|                                  |   |
|----------------------------------|---|
| Sustainable offer status         | Not Green Premium product   |
| RoHS (date code: YYWW)           | Compliant - since 1411 - Schneider Electric declaration of conformity<br><a href="#">Schneider Electric declaration of conformity</a> |
| REACH                            | Reference not containing SVHC above the threshold<br><a href="#">Reference not containing SVHC above the threshold</a>                |
| Product end of life instructions | Need no specific recycling operations   |

## Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|