



Main

range of product	Magelis XBTRT
display resolution	198 x 80 pixels
software type	Configuration software
software designation	Vijeo Designer Lite
operating system	Windows

Complementary

display type	Extra-bright matrix backlit LCD
touch sensitive zone	Matrix, 11 x 5 cells
character font	Latin Cyrillic Greek Chinese (simplified Chinese) Katakana
supply voltage limits	18...30 V
residual ripple	<= 1200 mV
power consumption	<= 5 W
number of key	12
number of fixed keys	2
number of customisable keys	10
local signalling	1 buzzer 13 LEDs
number of pages	256 alarm pages 200 application pages
memory type	Flash
memory capacity	512 kB
integrated connection type	Power supply : removable screw terminal block Serial link : female RJ45, asynchronous transmission mode (RS232C/RS485) multidrop topology Printer port : 8-way female mini DIN
realtime clock	Access to the PLC real-time clock
range compatibility	Modicon Quantum Modicon M340 Twido Modicon Momentum Modicon TSX Micro Modicon Premium
product mounting	Flush mounting
fixing mode	By 4 spring clips on 1.5 to 6 mm thick panel
display material	Polyester
front material	PPT
keypad material	Polyester
marking	CE
height	118 mm
width	137 mm
depth	79 mm

cut-out dimensions	119.6 (+/- 0.5) x 105.2 (+/- 0.4) mm
product weight	0.55 kg

Environment

product or component type	Small panel with touchscreen and keypad
display colour	Green Orange Red
messages display capacity	10 lines of 33 characters maximum Graphic objects (bargraph, button, light...) 2 lines of 5 characters minimum
[Us] rated supply voltage	24 V DC
supply	External source
downloadable protocols	Modbus Third party protocols Uni-TE
standards	CSA C22.2 No 14 IEC 60068-2-27 UL 508 IEC 61131-2 IEC 60068-2-6
product certifications	UL 1604 CSA Class 1 Division 2 ATEX zone 2/22 UL Class 1 Division 2
ambient air temperature for operation	0...55 °C
ambient air temperature for storage	-20...60 °C
relative humidity	0...85 % Without condensation
IP degree of protection	IP20 (rear panel) conforming to IEC 60529 IP65 (front panel) conforming to IEC 60529
NEMA degree of protection	NEMA 4X (front panel) for indoor use
shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27
vibration resistance	1 gn (f = 8.45...150 Hz) conforming to IEC 60068-2-6 +/- 3.5 mm (f = 2...8.45 Hz) conforming to IEC 60068-2-6
resistance to electromagnetic fields	10 V/m conforming to IEC 61000-4-3


Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0823 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold

Contractual warranty


Warranty period	18 months
-----------------	-----------

Dimensions

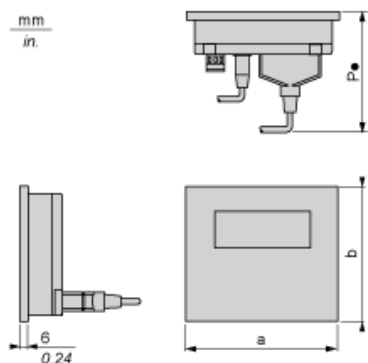

a		a1 (1)		b		b1 (1)		P1 (2)		P2 (3)		P3 (4)		P4 (5)	
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.
137	5.39	160	6.29	118	5	146	6	79	3.11	104	4.09	58	2.28	104	4.09
(1) With fixing clips (included with product) (2) P1: depth with RJ45 cable XBTZ9780 (for Twido, TSX Micro and Premium) (3) P2: depth with 25-way SUB-D cable XBTZ938 (for TeSys model U and ATV 61/71 drives) (4) P3: depth with 25-way SUB-D angled cable XBTZ9680 (for Twido, TSX Micro and Premium) or XBTZ998 (for Modicon STB) (5) P4: depth with 25-way SUB-D cable XBTZ68/Z9681 (for Twido, TSX Micro and Premium)															

Cut-out for Flush Mounting



Panel thickness = 1.5...6 mm / 0.05...0.23 in.

H		G		r max.	
±0.4 mm	±0.02 in.	±0.5 mm	±0.02 in.	mm	in.
105.2	4.14	119.6	5	1.5	0.05