


General-Purpose Cable Ties and Accessories

Two-Way Screw Mount

- SMNY-000 accepts 18 lb. (80N) tensile strength cable ties (miniature)
- SMNY-001 accepts up to 50 lb. (222N) tensile strength cable ties

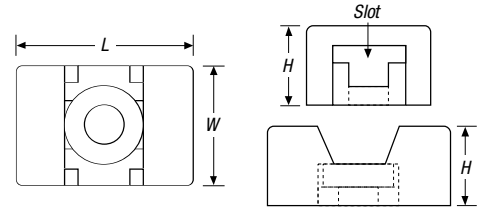


| BULK PKG. CAT. NO. | MATERIAL | H HEIGHT IN./MM | L LENGTH IN./MM | W WIDTH IN./MM | SLOT HEIGHT IN./MM | SLOT WIDTH IN./MM | MOUNT METHOD | BULK PKG. QTY. |
|--------------------|-------------------|-----------------|-----------------|----------------|--------------------|-------------------|----------------|----------------|
| SMNY-000-9-D | Natural Nylon 6.6 | .27/6.86 | .57/14.48 | .34/8.64 | .07/1.78 | .12/3.10 | #4 Screw | 500 |
| SMNY-001-9-D | Natural Nylon 6.6 | .25/7.11 | .60/15.24 | .38/9.77 | .06/1.52 | .20/5.68 | #6 or #8 screw | 500 |

SMNY series for use in temperatures ranging from -40° F to 221° F (-40° C to 105° C).

Four-way screw mount for cable ties up to 50-lb. (222N) tensile strength!

Four-Way Mount

- Mount with #6 or #8 screws
- Available in 6.6 natural nylon

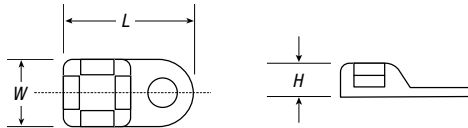


| BULK PKG. CAT. NO. | H IN./MM | L IN./MM | W IN./MM | SLOT W IN./MM | MOUNT SCREW | BULK PKG. QTY. |
|--------------------|----------|-----------|-----------|---------------|-------------|----------------|
| SMNY-220-9-D | .23/5.84 | .95/25.13 | .50/12.70 | .22/5.59 | #6, #8 | 500 |

• Natural nylon color.
For use in temperatures ranging from -40° F to 185° F (-40° C to 85° C).

STRONG — up to 50-lb. tensile strength!

Push Mounts

- PMNY-185**
- Versatile push mount for cable ties to 50-lb. tensile strength
 - For use in .187"/.192" mounting hole for panel thickness .030" to .080"
- PMNY-245**
- Accepts cable ties to 50-lb. tensile (miniature through standard)
 - For use in .250" mounting hole for maximum panel thickness of .062"

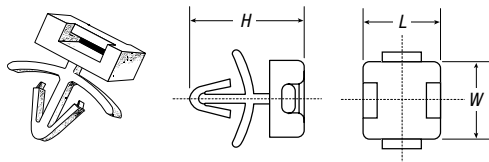


| BULK PKG. CAT. NO. | MATERIAL | H HEIGHT IN./MM | L LENGTH IN./MM | W WIDTH IN./MM | SLOT HEIGHT IN./MM | BULK PKG. QTY. |
|--------------------|----------|-----------------|-----------------|----------------|--------------------|----------------|
| PMNY-185-9-D | Nylon | .64/16.26 | .43/10.92 | .07/1.65 | .07/1.65 | 500 |
| PMNY-254-9-C | Nylon | .36/9.02 | .32/8.13 | .05/1.27 | .22/5.59 | 100 |
| PMNY-245-9-D | Nylon | .36/9.02 | .32/8.13 | .05/1.27 | .22/5.59 | 500 |

• Natural nylon color.
For use in temperatures ranging from -40° F to 185° F (-40° C to 85° C).

Snap Mounts

- For panel thicknesses from .060" to .150" to hold separate pieces of material together
- For MSNY-166-0-M used with W4 or N4 Series Cable Clamps, allowable panel thickness is .030" to .050"
- For MSNY-187-0-M used with W6 or N6 Series Cable Clamps, allowable panel thickness is .030" to .050"

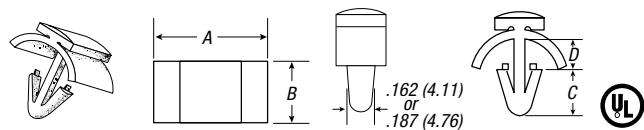

| CAT. NO. | MATERIAL | A IN./MM | B IN./MM | C IN./MM | D IN./MM | BULK PKG. QTY. |
|--------------|----------------|------------|-----------|-----------|-----------|----------------|
| MSNY-166-0-M | UV Black Nylon | .49/12.45 | .31/7.87 | .28/7.11 | .18/4.57 | 1,000 |
| MSNY-187-0-M | UV Black Nylon | .625/15.87 | .343/8.73 | .281/7.14 | .210/5.33 | 1,000 |