


Thomas & Betts

Ty-Rap® Cable Tie Tool

CAT. NO.
WT193A

Installs Self-Locking Ty-Rap® Cable Ties
rapidly and consistently.

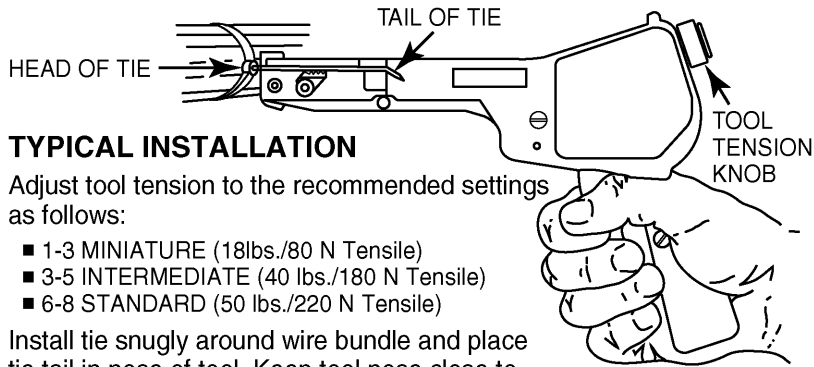

TYPICAL INSTALLATION

Adjust tool tension to the recommended settings
as follows:

- 1-3 MINIATURE (18lbs./80 N Tensile)
- 3-5 INTERMEDIATE (40 lbs./180 N Tensile)
- 6-8 STANDARD (50 lbs./220 N Tensile)

Install tie snugly around wire bundle and place
tie tail in nose of tool. Keep tool nose close to
head of tie. Squeeze tool handle (repeat if
necessary) until tail of tie is cut-off.

On return stroke, turn tool sideways to eject tail.

**REPLACEMENT BLADE
NUMBER R464201**

**NOTE: DO NOT DISASSEMBLE TOOL;
IT IS FACTORY SET.**



For parts or service, contact the tool service center at 1-800-284-TOOL (8665).

WARRANTY: Thomas & Betts sells this product with the understanding that the user will perform all necessary tests to determine the suitability of this product for the user's intended application. Thomas & Betts warrants that this product will be free from defects in materials and workmanship for the period stated on the enclosed warranty card. Upon prompt notification of any warranted defect, Thomas & Betts will, at its option, repair or replace the defective product or refund the purchase price. Proof of purchase is required. Misuse or unauthorized modification of the product voids all warranties.

Limitations and Exclusions: THE ABOVE WARRANTY IS THE SOLE WARRANTY CONCERNING THIS PRODUCT, AND IS IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE SPECIFICALLY DISCLAIMED. LIABILITY FOR BREACH OF THE ABOVE WARRANTY IS LIMITED TO COST OF REPAIR OR REPLACEMENT OF THE PRODUCT, AND UNDER NO CIRCUMSTANCES WILL THOMAS & BETTS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.