




PRODUCT SPECIFICATIONS

16 AWG / 4 Conductor Oxygen Free Copper Speaker Wire Stranded

COMPLIANCE			
RoHS	c(UL)us Listed		
SPECIFICATIONS			
NEC/(UL) Specification CL3			
C(UL) Specification CM			
EU Directive 2002/95/EC (RoHS)			
CERTIFICATIONS			
UL Listed Type CL3			
C(UL) Type CM			
PHYSICAL SPECIFICATIONS	ELECTRICAL CHARACTERISTICS		
Color Code	Black, Red, White, Green	Capacitance (Pf/m)	65.2919
Conductor Material	Stranded OFC	Nominal Velocity of Propagation VP	66%
AWG	16	Nominal Conductor DC Resistance DCR@20°C (ohm/km)	13.124
Conductor Diameter (mm)	0.16	Maximum Operating Voltage-UL (Voltage)	300 V
Conductor Stranding	65	Max Recommended Current (per conductor @ 25°C)	9 Amps
Insulating Material Type	PVC	MECHANICAL CHARACTERISTICS	
Insulation Average Thickness (mm)	0.31	Operating Temperature Range	-20°C to 60°C
Insulation Diameter (±0.05 mm)	2.1	Max. Recommended Pulling Tension	578.266 N
Jacket Color	White	Minimum Bending Radius / Minor Axis (mm)	66.17
Jacket Average Thickness (mm)	0.6	PART NUMBER	LENGTH
Jacket Material Type	PVC	AW164-01989	500 ft Pull Box
Out Diameter (±0.05 mm)	6.5		
Ripcord	Nylon		
Total Cable Weight (lbs / 500 ft)	27		

Cross Section:

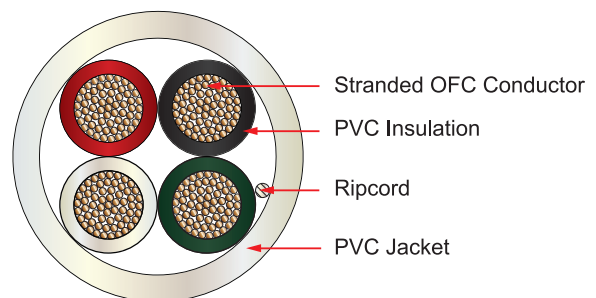

CABLE MARKING
 VERICOM OFC SPEAKER CABLE 16 AWG 4C (UL) E364604-T CL3 75C RoHS 000FT USED / 500 FT REMAINING

NOTE: TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20170804.2