
# **LANDSCAPE LIGHTING**

## LANDSCAPE SPLICEPOST

Our Landscape SplicePost for outdoor luminaires is different from any other "hollow pipe" style landscape lightpost on the market. It features an internal wiring compartment/junction box, rated for 19 cubic inches that easily accommodates two (2) 20 AMP circuits. The Landscape SplicePost allows the installer to make a proper ground connection to safeguard people and property from electrical shock hazards.

- The Landscape SplicePost is UL Listed as a "Luminaire Fixture Fitting," suitable for use in wet locations.
- Meets the requirements of the 2017 National Electrical Code: Articles 314.15, 314.16(A)(2) and 314.17(B).
- The Landscape SplicePost features a Separator Disk™ and SpliceCap™ that creates an integral "junction box" suitable for splicing.
- The PVC SpliceCap is non-metallic and suitable for the majority of outdoor luminaires on the market.

For warranty information visit www.engproducts.com.



NEC Article 314.16(A)(2) — Boxes 1650 cm³ (100 in³) or less, other than those described in Table 314.16(A), and non-metallic boxes shall be durably and legibly marked by the manufacturer with their volume.

The Landscape SplicePost is shatter resistant to denting or cracking typically caused by landscape maintenance equipment. It is corrosion and UV resistant and impervious to changing environmental conditions.

When wiring multiple luminaires in series, the Landscape SplicePost's angled bottom allows UF Cable or Conduit to easily enter at different depths to eliminate cable congestion.



SpliceCap accommodates a 1/2" trade size conduit nipple.

NEC Article 314.17 — Conductors entering boxes, conduit bodies or fittings shall be protected from abrasion and shall comply with 314.17(B).

... Where raceway or cable is installed with metal boxes or conduit bodies, the raceway or cable shall be secured to such boxes and conduit bodies.

Replaces EMT, conduit connectors and weatherproof boxes.

Uni-Stabilizer™ features unique concave stabilizing blades allow ground material to be easily packed around the Landscape SplicePost for fast, easy and secure installation.

The Uni-Stabilizer minimizes the Landscape SplicePost's movement typically caused by ground freezing and thawing.






# WIRING CONNECTIONS INSIDE LANDSCAPE SPLICEPOST CAP — CUT-AWAY EXAMPLE

The SpliceCap's 19 cubic inch box volume can house two (2) 20 AMP circuit conductors.

Eight (8) internal "Stops" seat and firmly hold the Separator Disk in place when the SpliceCap is positioned on the PVC Pipe.



SpliceCap compartment fully encloses and protects the circuit conductors from moisture, dirt and abrasion.

Raised "Grips" simplify installation and removal of the SpliceCap.

UF Connector secures the incoming supply line cable to the Separator Disk.

Incoming supply line cable.

Separator Disk with attached Ground Wire. Use with non-grounded metallic luminaires to make a safe ground connection.

Catalog Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/ Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
Landscape SplicePost										
LSPB	17200	Landscape SplicePost: PVC - Black	EA	1	ВХ	9	9	9	Yes	21
17230	17230	Landscape SplicePost Cap: PVC, Separator Disk - Black	EA	1	ВХ	12	12	12	Yes	1

**Note:** Landscape SplicePosts are ONLY sold in case quantities of nine (9) per Carton.

#### UNITS OF MEASURE KEY

Order Unit: The Unit to be ordered; Order Qty: Number of pieces in each Unit; Unit Pkg: Packaging types - BG (Bag), BX (Box), BN (Bulk); Units/Case: Unit packages contained in the Case; TL Case Qty: The total number of items in each Master Case; Min Order Qty: The smallest Unit that can be ordered; MM Req: Must order multiples of the Unit in the stated quantities; Ship Wt (Lbs): Total weight of the Units per Carton

## www.engproducts.com




# LANDSCAPE LIGHTING

### LANDSCAPE LIGHTPOST

The Landscape LightPost is UL Listed as a "Luminaire Fixture Fitting," suitable for use in wet locations and complies with the 2017 National Electrical Code: Article 314.15. It is designed for line voltage landscape luminaires but can also be used for low voltage luminaire.

For warranty information visit www.engproducts.com.

\*Note: The Landscape LightPost should always be used with a UL Listed Luminaire and a grounding means (i.e., ground bonded third wire) suitable for use in wet locations.

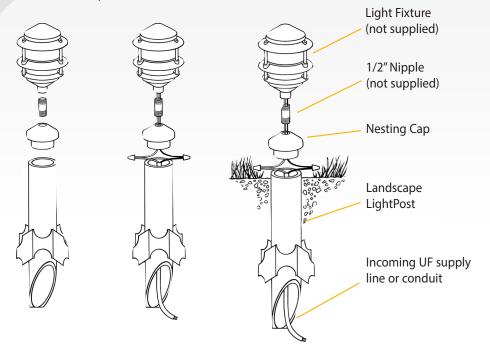



### **ASSEMBLY INSTRUCTIONS**

- 1. Feed the luminaire's black, white and ground wires through the 1/2" nipple (not supplied) and Nesting Cap. Thread and tighten the 1/2" nipple into the top of the Nesting Cap.
- 2. Using wire nuts or another appropriate connector, connect the supply wires to the luminaire's wires. Then push the luminaire and Nesting Cap onto the top of the Landscape LightPost.
- 3. Place the wired Landscape LightPost into the excavated trench and position to the desired height.

Catalog Number	UPC Number	Description	Order Unit	Unit Qty	Unit Pkg	Units/ Case	TL Case Qty	Min Order Qty	MM Req	Ship Wt (Lbs)
Landscape Li	ghtPost									
LLPN25B	12701	Landscape LightPost: 17.5-Inch - Black	EA	1	ВХ	9	9	9	Yes	21
E04-002-004	14025	Landscape LightPost Cap: Black	EA	1	ВХ	12	12	12	Yes	1

**Note:** Landscape LightPosts are ONLY sold in case quantities of nine (9) per Carton.

#### UNITS OF MEASURE KEY

Order Unit: The Unit to be ordered; Order Qty: Number of pieces in each Unit; Unit Pkg: Packaging types - BG (Bag), BX (Box), BN (Bulk); Units/Case: Unit packages contained in the Case; TL Case Qty: The total number of items in each Master Case; Min Order Qty: The smallest Unit that can be ordered; MM Req: Must order multiples of the Unit in the stated quantities; Ship Wt (Lbs): Total weight of the Units per Carton

EO2-100-000 C1 (05/18-BB)

©2018 Engineered Products Company. All Rights Reserved.
Landscape SlicePost and Landscape LightPost are trademarks of Engineered Products Company.

