


Product availability : Stock - Normally stocked in distribution facility



Price\* : 60.00 USD

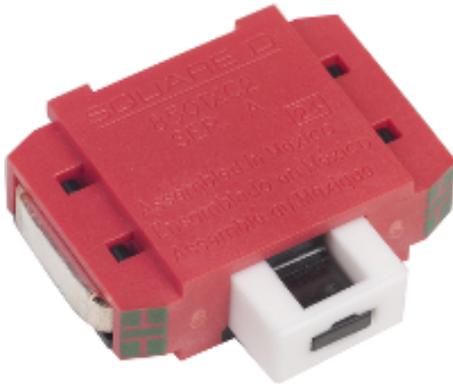

### Main

Range of product	8501X
Relay type	Control relay
Product or component type	Master contact cartridge

### Complementary

Rated breaking capacity	<p>6 kA at: 120 V AC for: inductive load control circuit per UL 508</p> <p>3 kA at: 240 V AC for: inductive load control circuit per UL 508</p> <p>1.5 kA at: 480 V AC for: inductive load control circuit per UL 508</p> <p>1.2 kA at: 600 V AC for: inductive load control circuit per UL 508</p> <p>10 kA at: ≤ 600 V AC for: resistive load control circuit per UL 508</p> <p>1.1 kA at: 125 V DC for: inductive load control circuit per UL 508</p> <p>0.55 kA at: 250 V DC for: inductive load control circuit per UL 508</p> <p>0.2 kA at: 301...600 V DC for: inductive load control circuit per UL 508</p> <p>4 kA at: 125 V DC for: resistive load control circuit per UL 508</p> <p>0.8 kA at: 250 V DC for: resistive load control circuit per UL 508</p>
[Icm] rated short-circuit making capacity	<p>60 kA at: 120 V AC for: inductive load control circuit per UL 508</p> <p>30 kA at: 240 V AC for: inductive load control circuit per UL 508</p> <p>15 kA at: 480 V AC for: inductive load control circuit per UL 508</p> <p>12 kA at: 600 V AC for: inductive load control circuit per UL 508</p> <p>10 kA at: ≤ 600 V AC for: resistive load control circuit per UL 508</p> <p>1.1 kA at: 125 V DC for: inductive load control circuit per UL 508</p> <p>0.55 kA at: 250 V DC for: inductive load control circuit per UL 508</p> <p>0.2 kA at: 301...600 V DC for: inductive load control circuit per UL 508</p> <p>4 kA at: 125 V DC for: inductive load control circuit per UL 508</p> <p>0.8 kA at: 250 V DC for: resistive load control circuit per UL 508</p>
Contacts type and composition	1 NO 1 master contact cartridge

### Environment

Product certifications	<p>CE</p> <p>UL recognized E78403 CCN NKCR2</p> <p>CSA LR60905 class 3211 02</p>
------------------------	--

## Ordering and shipping details

Category	21159 - 8501 X ACCESSORIES
Discount Schedule	CP2
GTIN	00785901537137
Nbr. of units in pkg.	20
Package weight(Lbs)	0.02
Returnability	Y
Country of origin	MX

## Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1332 - Schneider Electric declaration of conformity <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>
Product environmental profile	Available
Product end of life instructions	Available

## Contractual warranty

Warranty period	18 months
-----------------	-----------