

Hazardous Location Fittings

Aluminum External Hubs with Installed Green Ground Screw

X Style with Surface Cover

CAT. NO.	HUB SIZE	UNIT QTY.	STD. PKG.	WT. LBS. PER 100
GAX-1†	½"	1	5	125
GAX-2†	¾"	1	5	125
GAX-3†	1"	1	5	125
GAX-5†	1½"	1	1	257

X Style with Flange and Surface Cover

CAT. NO.	HUB SIZE	UNIT QTY.	STD. PKG.	WT. LBS. PER 100
GAFX-1†	½"	1	4	135
GAFX-2†	¾"	1	4	135

Surface-Style Cover

CAT. NO.	COVER OPENING	FIT BOXES	STD. PKG.	WT. LBS. PER 100
GAS-123•	3 ¹¹ / ₁₆ "	½", ¾", 1"	1	36
GAS-4•	3 ²⁹ / ₃₂ "	1¼"	1	52
GAS-56•	5 ³ / ₁₆ "	1½", 2"	1	69

Dome-Style Cover (Class I, Group D only)

CAT. NO.	COVER OPENING	FITS BOXES	INSIDE HEIGHT	CU. IN. CAPACITY	STD. PKG.	WT. LBS. PER 100
GAD-123•	3 ¹¹ / ₁₆ "	½", ¾", 1"	2½"	23	1	71

• Made-to-order items. Consult factory for lead time and minimum quantities.

† Suffix-OR: O-ring available for NEMA 4 rating. Consult factory for lead time and price.

Aluminum External Hubs with Installed Green Ground Screw, Covers and Plugs

U Style with Canopy Cover

CAT. NO.	HUB SIZE	UNIT QTY.	STD. PKG.	WT. LBS. PER 100
GAJU-2	¾"	1	5	130
GAJU-3	1"	1	5	130
GAJU-6•	2"	1	1	273

Canopy-Style Cover

CAT. NO.	COVER OPENING	FITS BOXES	UNIT QTY.	STD. PKG.	WT. LBS. PER 100
GAJ-123•	3 ¹¹ / ₁₆ "	½", ¾", 1"	1	10	44
GAJ-4•	3 ²⁹ / ₃₂ "	1¼"	1	5	61
GAJ-56•	5 ³ / ₁₆ "	1½", 2"	1	5	78

• Made-to-order items. Consult factory for lead time and minimum quantities.



GAX



GAFX



GAS



GAD




GAJU



GAJ


Hazardous Location Fittings

Dimensions and Cubic Inches (CI) for External Hubs

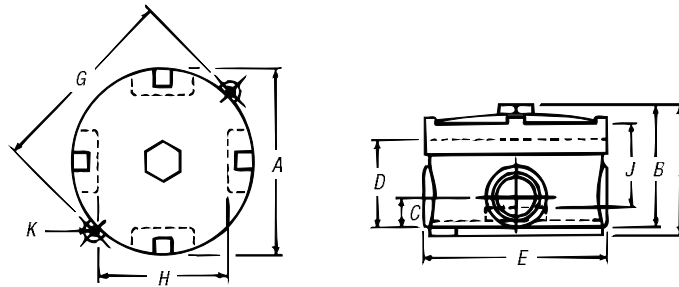

EXUN and EXUNL

HUB SIZE	DIMENSIONS (IN.)										
	A	B	C	D	E	F	G	H	J	K	CI
1/2"	3 ³ / ₃₂ "	3 ¹ / ₈ "	2 ²¹ / ₃₂ "	2 ¹ / ₁₆ "	4	3 ³ / ₈ "	4 ¹ / ₄ "	1 ¹ / ₄ "	1 ¹ / ₁₆ "	1 ¹ / ₆₄ "	20.3
3/4"	3 ³ / ₃₂ "	3 ¹ / ₈ "	2 ²⁷ / ₃₂ "	2 ¹ / ₁₆ "	4	3 ³ / ₈ "	4 ¹ / ₄ "	1 ¹ / ₄ "	1 ¹ / ₁₆ "	1 ¹ / ₆₄ "	20.3
1"	3 ³ / ₃₂ "	3 ¹ / ₁₆ "	3 ¹ / ₄ "	2 ¹ / ₄ "	4	3 ¹¹ / ₁₆ "	4 ¹ / ₄ "	1 ¹ / ₁₆ "	1 ¹ / ₁₆ "	1 ¹ / ₆₄ "	20.0

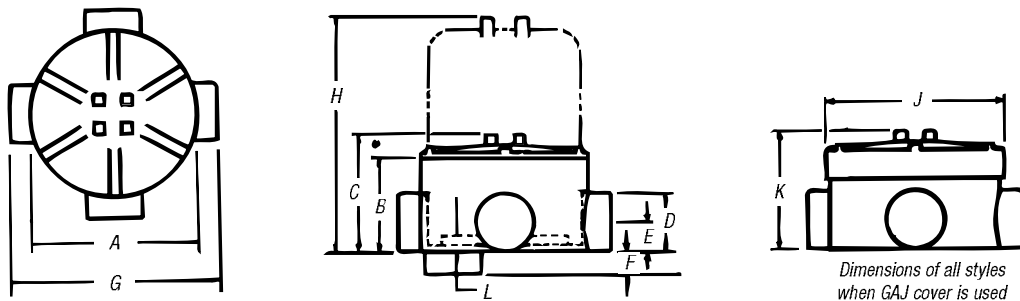


GAC, GAE, GAL, GALB, GAT and GAX

COVER OPENING	HUB SIZE	DIMENSIONS (IN.)											
		A	B	C	D	E	F	G	H	J	K	L	CI
3 ¹ / ₁₆ "	1/2"	4"	2 ¹ / ₄ "	2 ¹ / ₁₆ "	1 ³ / ₈ "	1 ¹ / ₁₆ "	1 ¹ / ₁₆ "	5 ⁵ / ₁₆ "	5 ⁵ / ₁₆ "	4 ³ / ₁₆ "	3 ³ / ₁₆ "	9 ¹ / ₁₆ "	18.8
3 ¹ / ₁₆ "	3/4"	4"	2 ¹ / ₄ "	2 ¹ / ₁₆ "	1 ³ / ₈ "	1 ¹ / ₁₆ "	1 ¹ / ₁₆ "	5 ⁵ / ₁₆ "	5 ⁵ / ₁₆ "	4 ³ / ₁₆ "	3 ³ / ₁₆ "	9 ¹ / ₁₆ "	18.8
3 ¹ / ₁₆ "	1"	4"	2 ¹ / ₄ "	2 ¹ / ₁₆ "	1 ⁵ / ₈ "	1 ³ / ₁₆ "	2 ⁷ / ₃₂ "	5 ¹ / ₂ "	5 ⁵ / ₁₆ "	4 ³ / ₁₆ "	3 ³ / ₁₆ "	9 ¹ / ₁₆ "	18.8
3 ²⁹ / ₃₂ "	1 ¹ / ₄ "	4 ⁵ / ₁₆ "	3"	3 ¹ / ₁₆ "	2 ¹ / ₁₆ "	1 ¹ / ₃₂ "	1 ¹ / ₈ "	5 ¹¹ / ₁₆ "	—	4 ³ / ₁₆ "	3 ¹ / ₁₆ "	5 ¹ / ₈ "	28.0
5 ³ / ₁₆ "	1 ¹ / ₂ "	5 ³ / ₄ "	4 ¹ / ₄ "	5 ¹ / ₁₆ "	2 ¹ / ₈ "	1 ¹ / ₁₆ "	1 ¹ / ₈ "	6 ³ / ₈ "	—	6 ¹ / ₁₆ "	5 ¹ / ₃₂ "	13 ¹ / ₁₆ "	69.3
5 ³ / ₁₆ "	2"	5 ³ / ₄ "	4 ¹ / ₄ "	5 ¹ / ₁₆ "	2 ¹ / ₈ "	1 ¹ / ₁₆ "	1 ¹ / ₈ "	6 ³ / ₈ "	—	6 ¹ / ₁₆ "	5 ¹ / ₃₂ "	13 ¹ / ₁₆ "	69.3

Hazardous Location Fittings


Dimensions and Cubic Inches (CI) for External Hubs (continued)

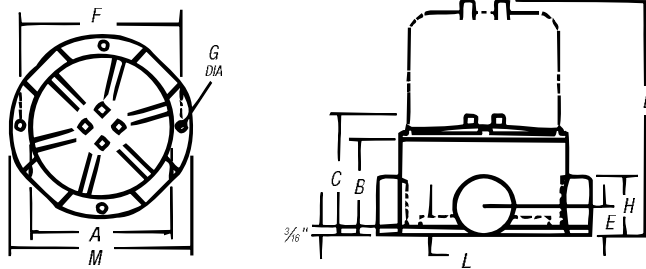

GAFX

COVER OPENING	HUB SIZE	DIMENSIONS (IN.)										
		A	B	C	D	E	F	G	H	L	M	CI
3 ¹ / ₁₆ "	1/2"	4"	2 ¹ / ₄ "	2 ⁵ / ₁₆ "	5 ⁵ / ₁₆ "	1 ¹ / ₁₆ "	4 ¹ / ₂ "	1/4"	1 ³ / ₈ "	3/16"	5 ³ / ₁₆ "	20.0
3 ¹ / ₁₆ "	3/4"	4"	2 ¹ / ₄ "	2 ⁵ / ₁₆ "	5 ⁵ / ₁₆ "	1 ¹ / ₁₆ "	4 ¹ / ₂ "	1/4"	1 ³ / ₈ "	3/16"	5 ³ / ₁₆ "	20.0
3 ¹ / ₁₆ "	1"	4"	2 ¹ / ₄ "	2 ⁵ / ₁₆ "	5 ⁵ / ₁₆ "	1 ³ / ₁₆ "	4 ³ / ₄ "	5/16"	1 ³ / ₈ "	3/16"	5 ¹ / ₂ "	19.0

Note: All GAF units supplied as X configuration with proper number of explosion-proof close-up plugs to make C, T or L.

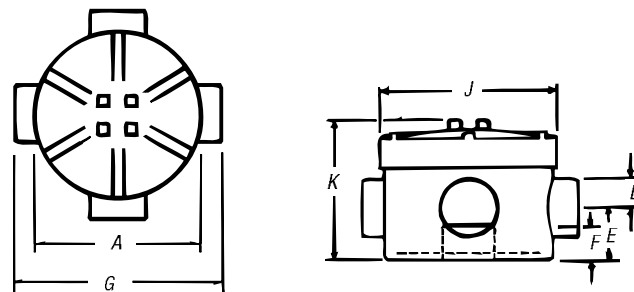

GAJU

COVER OPENING	HUB SIZE	DIMENSIONS (IN.)								CI
		A	D	E	F	G	J	K		
3 ¹ / ₁₆ "	1/2"	4"	1 ³ / ₁₆ "	1 ¹ / ₂ "	3 ¹ / ₃₂ "	5 ⁵ / ₁₆ "	4 ³ / ₁₆ "	4"	23.8	
3 ¹ / ₁₆ "	3/4"	4"	1 ³ / ₁₆ "	1 ¹ / ₂ "	3 ¹ / ₃₂ "	5 ⁵ / ₁₆ "	4 ³ / ₁₆ "	4"	23.8	
3 ¹ / ₁₆ "	1"	4"	1 ³ / ₁₆ "	1 ¹ / ₂ "	3 ¹ / ₃₂ "	5 ⁵ / ₁₆ "	4 ³ / ₁₆ "	4"	23.8	
3 ²⁹ / ₃₂ "	1/4"	4 ⁵ / ₁₆ "	2 ¹ / ₁₆ "	1 ¹ / ₃₂ "	3/8"	5 ¹ / ₁₆ "	4 ³ / ₄ "	3 ⁵ / ₁₆ "	33.3	
5 ³ / ₁₆ "	1 ¹ / ₂ "	5 ³ / ₄ "	1 ¹ / ₁₆ "	2 ¹ / ₁₆ "	1 ¹ / ₂ "	6 ³ / ₈ "	6 ¹ / ₁₆ "	6 ³ / ₁₆ "	82.8	
5 ⁷ / ₁₆ "	2"	5 ³ / ₄ "	1 ¹ / ₁₆ "	2 ¹ / ₁₆ "	1 ¹ / ₂ "	6 ³ / ₈ "	6 ¹ / ₁₆ "	6 ³ / ₁₆ "	82.8	

Note: All GA & GAF series boxes are supplied with GAS or GAJ style covers. To order these boxes with GAD dome cover, consult factory.