



Color: Gray

UPC Code: 07847700577

Country Of Origin: United States

NEMA: 5-15P



5278-FWP

Brand Features

Leviton's Straight Blade Power Inlets are suitable for industrial indoor and outdoor applications. Glass-filled thermoplastic cover and plate provides outstanding impact resistance and durability. Stainless steel external hardware resists corrosive effects of moisture as dual gaskets, one under plate and one under lid, provide for a superior weather-resistant fit.

Item Description

15 Amp, 125 Volt, NEMA 5-15P, 2P, 3W, Power Inlet Receptacle, Straight Blade, Industrial Grade, Grounding, , Slots for Forked Terminals Wired, Nylon Strap - Gray

Technical Information

AC Horsepower Ratings
At Rated Voltage: 1/2 HP

Electrical Specifications

Amperage: 15 A

Current Limiting: Full Rated Current **Dielectric Voltage:** Withstands 1500V

per UL498

Grounding: Grounding

Pole: 2

Temperature Rise: Max 30C after 250 cycles OL at 200 percent rated current

Voltage: 125 VAC

Wire: 3

Environmental Specifications

Environment: Dry

Flammability: Rated V-2 per UL 94 Operating Temperature: -40°C to 60°C

Material Specifications **Body Material:** Nylon

Color: Gray

Cover and Plate Material: Glass-Filled

Thermoplastic

Face Material: Nylon

Grounding Screw: Brass 8-32

Line Contacts: Brass Strap Material: Nylon

Terminal Screws: Brass 10-32

Mechanical Specifications

Product ID: Markings are permanently

marked on device

Terminal Accom.: 18-10 AWG

Terminal ID: Brass-Hot, Green-Ground,

Silver-Neutral

Termination: Slots for Forked Terminals

Product Features
Color: Gray

Device Type: Straight Blade Flanged

...... N**e**raa 5 451


NEMA: 5-15P

Warranty: 2 Year Limited Standards and Certifications

ANSI: C-73

CSA C22.2 No. 42: File LR-16347

NEMA: WD-6 **UL498:** File E13393

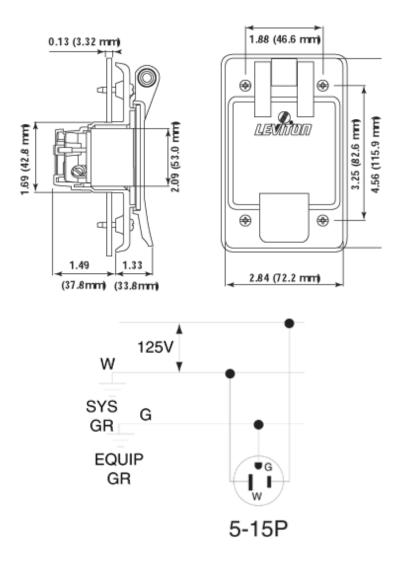

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:
JOB NUMBER:	

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

 $\label{eq:temperature} \textbf{Teléfono: +1-800-323-8920} \cdot \textbf{FAX: +1-800-832-9538} \cdot \textbf{Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): +1-800-824-3005}$

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 · FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. Todos los derechos reservados. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

